

Bernese GPS Software: Recent Developments and Plans


R. Dach,
H. Bock, A. Jäggi, S. Lutz, M. Meindl, L. Ostini, L. Prange,
S. Schaer^a, A. Steinbach, D. Thaller, P. Walser, G. Beutler

rolf.dach@aiub.unibe.ch

bernese@aiub.unibe.ch


Astronomisches Institut, Universität Bern, Sidlerstrasse 5, CH-3012 Bern

^a Bundesamt für Landestopographie swisstopo, Seftigenstrasse 264, CH-3084 Wabern




Bernese GPS Software

The Bernese GPS Software is used all over the world.

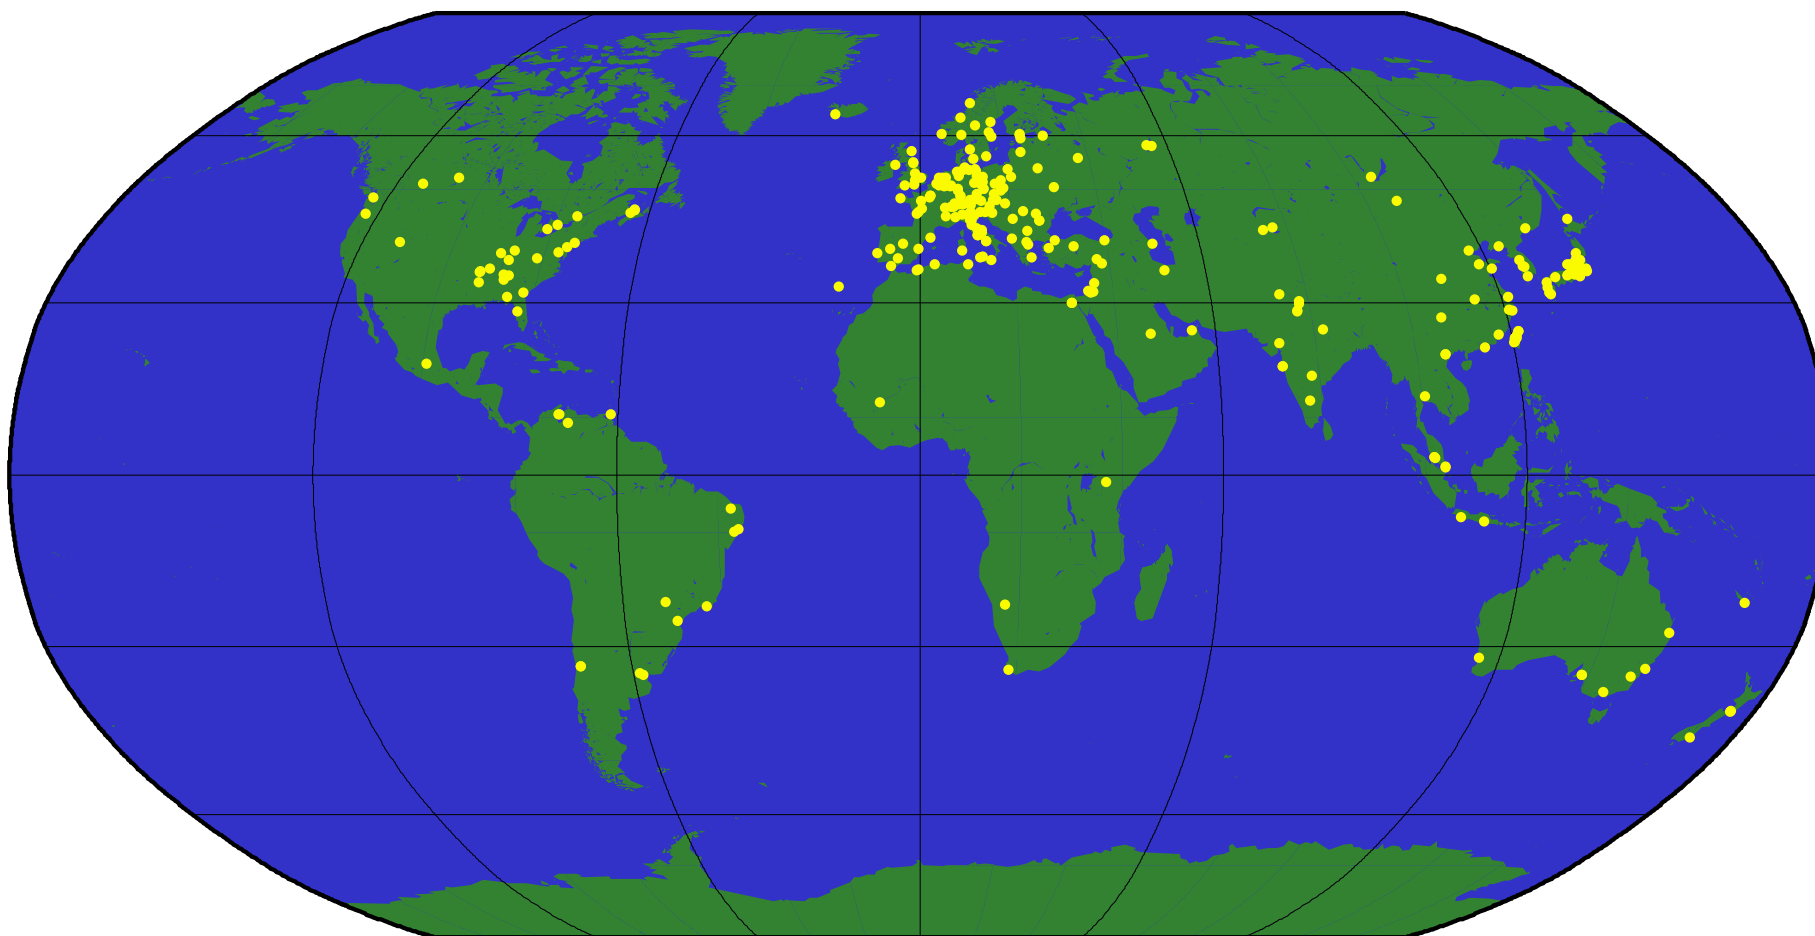


2008 Aug 18 16:34:57

Geographical Distribution of Institutions using the Bernese GPS Software



Bernese GPS Software: recent developments and plans

- Bernese GPS Software, Version 5.0 is distributed since May 2004.
- User manual was completed in January 2007.




Bernese GPS Software: recent developments and plans

- Bernese GPS Software, Version 5.0 is distributed since May 2004.
- User manual was completed in January 2007.

Current developments:

- New GNSS are expected in the near future.
There are plans to modernize the existing GNSS.
- Reprocessing efforts are ongoing at many places.
- Many model developments have been carried out in the last years.




Bernese GPS Software: recent developments and plans

- Bernese GPS Software, Version 5.0 is distributed since May 2004.
- User manual was completed in January 2007.

Current developments:

- New GNSS are expected in the near future.
There are plans to modernize the existing GNSS.
- Reprocessing efforts are ongoing at many places.
- Many model developments have been carried out in the last years.

What does this mean for the Bernese GPS Software?




A Multi-GNSS Analysis Software

Bernese GPS Software:

A multi-GNSS analysis software

- The software has been started as a GPS analysis tool.
- It is capable to process GLONASS data already for a long time.
- The measurements from both systems can be processed together on the observation level.




A Multi-GNSS Analysis Software

Bernese **GNSS** Software:

A multi-GNSS analysis software

- The software has been started as a GPS analysis tool.
- It is capable to process GLONASS data already for a long time.
- The measurements from both systems can be processed together on the observation level.



A Multi-GNSS Analysis Software


Bernese GNSS Software:

A multi-GNSS analysis software


- The software has been started as a GPS analysis tool.
- It is capable to process GLONASS data already for a long time.
- The measurements from both systems can be processed together on the observation level.


Extensions to the announced new/modernized GNSS:

- extension from two to n frequencies for each GNSS
- each GNSS may have different set of observation types



Flexible handling of observation types is necessary:

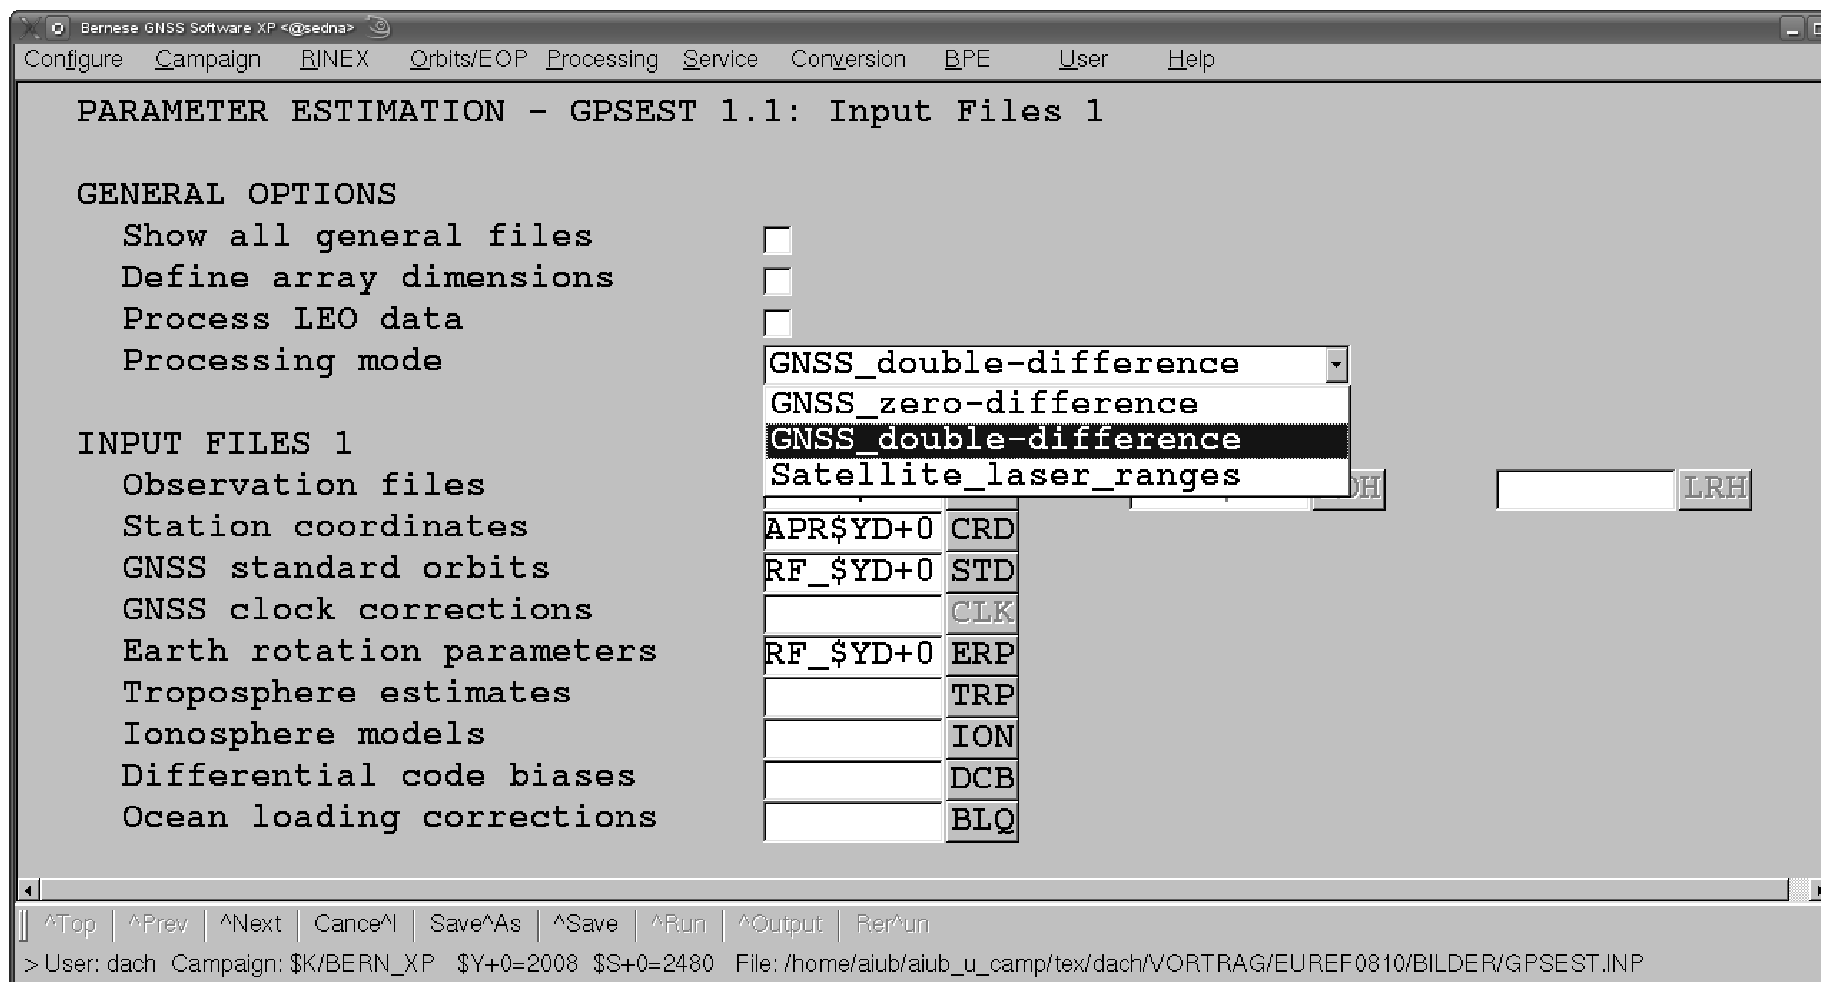



Flexible handling of observation types is necessary:

Bernese GNSS Software XP <@sedna>


Configure Campaign RINEX Orbits/EOP Processing Service Conversion BPE User Help

GPSEST 3.1: Observable Selection

GNSS SELECTION	<input checked="" type="checkbox"/> GPS	<input type="checkbox"/> GLONASS	<input checked="" type="checkbox"/> Galileo
Combination	None	None	Iono-free
Frequencies	None Iono-free	L1 L2	L1 L5 L7 L8 L6
Measurements	Geometry_free	Phase	Phase
Smoothed code	Widelane Mel-Wuebb GRAPHIC	<input type="checkbox"/>	<input type="checkbox"/>
SLR SELECTION	P-C_(None)		
Observations	P-C_(IF) P+C_(GF)		

^Top | ^Prev | ^Next | Cancel | Save^As | ^Save | ^Run | ^Output | Ber^un


> User: dach Campaign: \$K/BERN_XP \$Y+0=2008 \$S+0=2480 File: /home/aiub/aiub_u_camp/tex/dach/VORTRAG/EUREF0810/BILDER/GPSEST.INP



Flexible handling of observation types is necessary:


- All observations types from RINEX3 are kept together in one Bernese observation file per station and session.
- A complex set of modern F90 modules guarantees a flexible access to the measurements with individual linear combinations for each GNSS.
- The use of these modules simplifies the observation handling within the processing programs.
- New linear combinations may be easily implemented at one place for the entire software package.

⇒ M. Meindl et al., Developing a Generic Multi-GNSS Software Package, IGS Workshop, Miami, June 2008.




New file formats are necessary:

- **Bernese observations files**
(may contain all types of observations in one (common) file)
- **Bernese residual files**
(considering the new linear combinations)
- **Differential code biases**
(many new DCBs have to be expected with the new signal types)
- **Receiver information file**
(which receiver type is capable to receive which signal and priority lists for the observation selection)
- **Antenna phase center corrections**
(GNSS-dependent receiver antenna PCV information)



Other necessary developments to get a multi-GNSS software:

- increase the number of satellites that can be processed together
(32 GPS + 30 GLONASS + 36 Galileo \approx 100 satellites)
- correct input and output codes for each GNSS for all external files
(e.g., precise orbit file, clock RINEX file, ...)
- GNSS dependent parameter setup
(e.g., receiver antenna phase center offsets/variations, Earth rotation parameters, ...)
- requires the dynamic allocation of several arrays in many of the processing programs



Other necessary developments to get a multi-GNSS software:

Bernese GNSS Software XP <@sedna>

Configure Campaign RINEX Orbits/EOP Processing Service Conversion BPE User Help

GPSEST 1.4: Define array dimensions

SPECIFY THE DIMENSIONS OF THE MAIN ARRAYS IN GPSEST

blank: Compute size, limit size by built-in default settings

(use these options for special test applications only)

MAXLOC: Maximum number of parameters to be processed

MAXFIL: Maximum number of files to be processed

MAXSTA: Maximum number of stations involved

MAXSAT: Maximum number of satellites involved

MAXAMB: Maximum number of ambiguities in an observation file

MAXPAR: Maximum number of parameters simultaneously processed

MAXFLS: Maximum number of files simultaneously processed


MAXSAS: Maximum number of satellites simultaneously processed

MAXAMP: Maximum number of ambiguities simultaneously processed

MAXSNG: Maximum number of non-zero elements in one line of first design matrix

^Top | ^Prev | ^Next | Cancel | Save^As | ^Save | ^Run | ^Output | Rer^un


> User: dach Campaign: \$K/BERN_XP \$Y+0=2008 \$S+0=2480 File: /home/aiub/dach/GPSUSER/PAN/GPSEST.INP



Other necessary developments to get a multi-GNSS software:

- increase the number of satellites that can be processed together
(32 GPS + 30 GLONASS + 36 Galileo \approx 100 satellites)
- correct input and output codes for each GNSS for all external files
(e.g., precise orbit file, clock RINEX file, ...)
- GNSS dependent parameter setup
(e.g., receiver antenna phase center offsets/variations, Earth rotation parameters, ...)
- requires the dynamic allocation of several arrays in many of the processing programs

⇒ Version 5.1 will be declared as “Galileo-ready”.



To improve the reprocessing capability


1. a new coordinate/velocity file containing time intervals

IGS05 COORDINATES EXTRACTED FROM IGS05.SNX										09-MAY-2008											

FORMAT: 1																					
DATUM : IGS05																					
TYPE 001: STATION COORDINATES																					

STATION NAME		X (M)		Y (M)		Z (M)		FLG		EPOCH				VALIDITY INTERVAL (FROM -> TO).							
*****		*****		*****		*****		*****		YYYY MM DD HH MM SS				YYYY MM DD HH MM SS YYYY MM DD ...							
ABPO 33302M001		4097216.75080		4429118.87830		-2065771.49240		PPP		2000 01 01 00 00 00				...							
ADE1 50109S001		-3939181.98450		3467075.28480		-3613220.74210		PPP		2000 01 01 00 00 00				2004 12 23 ...							
ADE1 50109S001		-3939181.98450		3467075.28480		-3613220.74210		PPP		2000 01 01 00 00 00				2004 12 24 00 00 00				...			
ADIS 31502M001		4913652.94450		3945922.49800		995383.14420		PPP		2000 01 01 00 00 00				...							
AJAC 10077M005		4696989.50620		723994.38050		4239678.47430		IGS05		2000 01 01 00 00 00				...							
...																					
TYPE 002: STATION VELOCITIES																					

STATION NAME		VX (M/Y)		VY (M/Y)		VZ (M/Y)		FLG		VALIDITY INTERVAL (FROM -> TO)				RMS VX ...							
*****		*****		*****		*****		*****		YYYY MM DD HH MM SS				YYYY MM DD HH MM SS				*****			
ABPO 33302M001		-0.01100		0.01790		0.01660		NUVEL						...							
ADE1 50109S001		-0.04600		0.00570		0.04170		NUVEL						...							
ADIS 31502M001		-0.01850		0.01840		0.01870		NUVEL						...							
AJAC 10077M005		-0.01460		0.00370		-0.00530		IGS05						...							
...																					



To improve the reprocessing capability

1. a new coordinate/velocity file containing time intervals
2. a section on local ties is added to the station information file

TYPE 001: RENAMING OF STATIONS

TYPE 002: STATION INFORMATION

TYPE 003: HANDLING OF STATION PROBLEMS

TYPE 004: STATION EVENTS AND ECCENTRICITIES (INCLUDING TROPOSPHERE)


LOCAL TIE (2 MINUS 1) (M)

CONSTRAINTS (M) ...

CORRELATIONS


STATION NAME 1	STATION NAME 2	FLG	EPOCH	SYS	DN/DX	DE/DY	DU/DZ	DN/DX	DE/DY	D...
*****	*****	***	YYYY MM DD HH MM SS	***	****.****	****.****	****.****	**.*****	**.*****	***...
AIS1 49998S001		001	1996 04 17 00 00 00							
ALBH 40129M003		001	1994 04 14 00 00 00							
ALBH 40129M003		001	2003 09 08 00 00 00							
...										
ZIMJ 14001M006	ZIMM 14001S007	001	1998 07 06 00 00 00	XYZ	3.1340	13.750	-1.785			
...										

TYPE 005: HANDLING STATION TYPES




To improve the reprocessing capability

1. a new coordinate/velocity file containing time intervals
(“station ABC” no longer necessary)
2. a section on local ties is added to the station information file
(discontinuities and local ties may be specified considering an uncertainty)
3. FODITS: Find Outliers and Discontinuities in Time Series
(presented by L. Ostini et al. at the EUREF Symposium in Brussels, June 2008)
4. improved SINEX support
(e.g., several equipment setup per coordinate interval,
GNSS–dependent antenna corrections directly from the NEQ)
5. derive periodic functions for parameters in ADDNEQ2
(under development, not sure whether this feature will be a part of version 5.1)



Other Highlights from our Development


Other new features/models of a version 5.1*:



Other Highlights from our Development

Other new features/models of a version 5.1*:

* The final list of features and models provided with the delivery of version 5.1 to the user community will be defined later.




Other Highlights from our Development

Other new features/models of a version 5.1*:


selection with a potential relevance for EPN-processing

- GLONASS ambiguity resolution (not for all strategies)
- ADDNEQ2 supports SINEX containing NEQ (instead of COV).
- support of individually calibrated antennas in ANTEX
in an automated processing scheme
(Keywords: RINEX, SINEX)
- troposphere modelling: GMF/GPT, VMF1
- ionosphere modelling: higher order ionosphere correction
- ADDNEQ2: refinemened support for regional networks
(e.g., repeatability computation with Transformation parameters)
- ORBGEN: Stochastic pulses for orbit fitting



Time Line to Deliver Version 5.1

- The main developments shall be finished in 2009.
- Define a list of further implementations to finalize a deliverable version.
- Review of the on-line help.
- Update the processing examples.
- Develop and test the installation procedure.
- Update the initial “README”-files.
- Update and complete the user manual.



THANK YOU!

