

u^b

GNSS-based orbit and geodetic parameter estimation by means of simulated Genesis data

D. Arnold¹ O. Montenbruck² P. Steigenberger² A. Miller¹ C. Kobel¹ A. Jäggi¹


¹Astronomical Institute, University of Bern, Switzerland

²German Space Operations Center, Weßling, Germany



EGU General Assembly 2024, Vienna, Austria
Session G2.1
April 19, 2024

u^b

Genesis mission




- 1 satellite with instruments for 4 space geodetic techniques GNSS, SLR, DORIS, VLBI, space ties
- Aim: Contribute to an improved International Terrestrial Reference Frame
- Approved at ESA's Ministerial Council in 2022, part of FutureNAV, launch in 2028

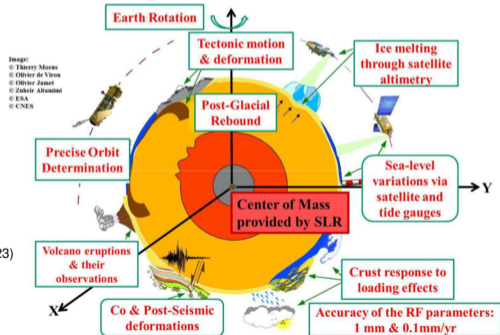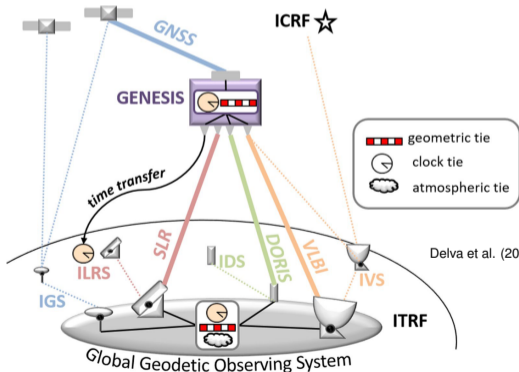


u^b


Genesis satellite and orbit



Delva et al. (2023)



- 6000 km altitude polar orbit (VLBI visibility)
- received signals emitted at **nadir angles up to 28°** (max. 14° on ground, 17° in LEO)
- Zenith- and nadir-pointing GNSS antennas

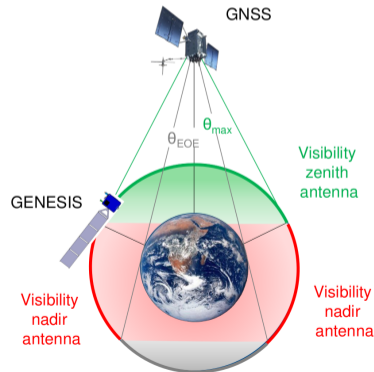

Montenbruck et al. (2023)


u^b

GNSS challenges & aim of the study

At nadir angles as large as 28°

- **only limited information** (gain, phase and pseudo-range variations) on GNSS transmit antennas available
- the **GNSS signal strength** might be problematic (drop of gain)

Montenbruck et al. (2023)* have analyzed the GNSS visibility for Genesis and presented comprehensive link budget simulations to **simulate realistic GNSS data**.



*: DOI 10.1007/s00190-023-01784-4


Question

How do uncertainties in GNSS transmit antenna phase patterns at large nadir angles affect the contribution of Genesis to global TRF solutions?

N.b.: In-flight calibrations weaken GNSS contribution to TRF realization!


u^b

Methods

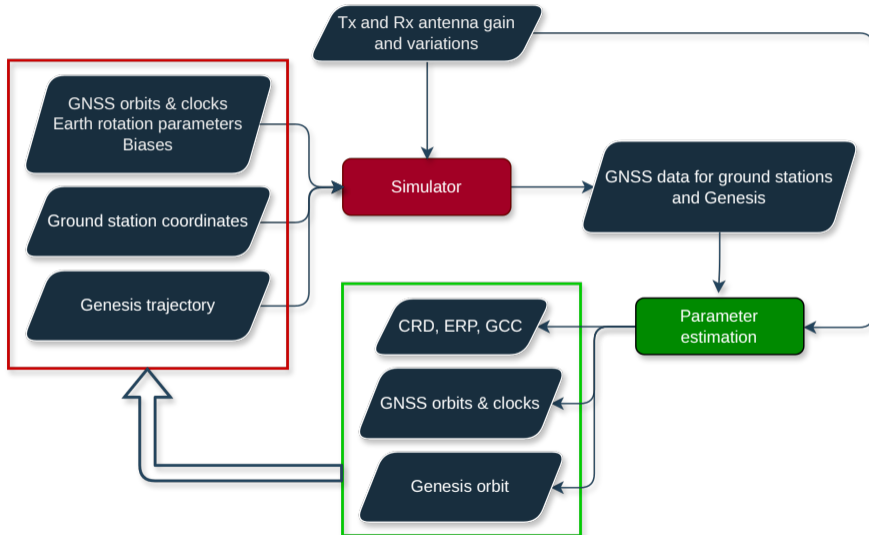

u^b

Methods

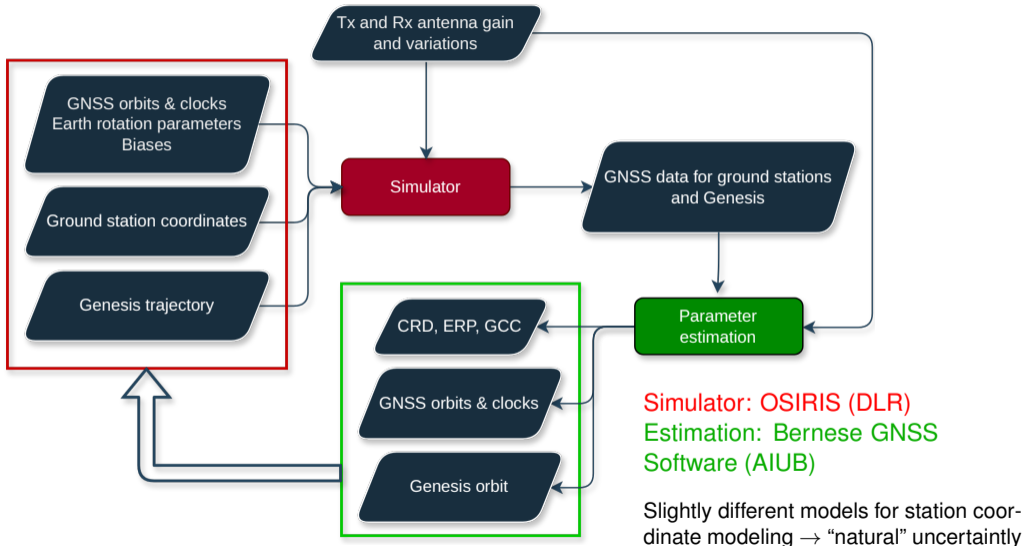


u^b Antenna phase patterns


Ground stations: IGS20.ATX

GNSS satellites:

- GPS: LMB20 antenna model (Montenbruck et al., 2024, DOI 10.1007/s00190-023-01809-y)
- Quadratic extrapolation of published patterns from 20° to 30° nadir angle for Galileo

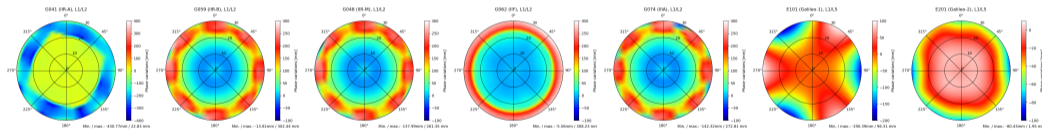


Genesis: Sentinel-6A patterns



u^b

Simulation

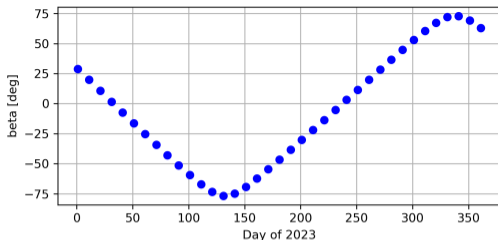

- Day 001, 011, ..., 361 of 2023 (37 days)
- Genesis orbit (5957 km, 95.5°): Dynamic orbit propagated using radiation pressure models based on 8-plate macro model for box and wing and nominal yaw attitude
- GNSS products: CODE final orbits, clocks, ERPs, biases
- Station coordinates: IGS cumulative SINEX, PSD, ITRF2020 seasonal harmonics, solid Earth tides, pole tides, ocean loading
- Ionosphere: CODE GIMs (ground stations), NeQuick-G (Genesis)
- Troposphere: GPT/GMF model

u^b

Estimation

- Undifferenced GNSS data processing
- Carrier phase ambiguities fixed in PPP-AR
- Estimated parameters:
 - Station coordinates
 - Earth rotation parameters
 - Geocenter coordinates
 - Site-specific troposphere parameters
 - GNSS satellite orbits
 - GNSS satellite clocks
 - Genesis orbit (initial cond. and constrained 30' piecewise-const. acc.)
 - Station and Genesis receiver clocks
 - Observable-specific code biases
- Data sampling: 180 s (\rightarrow about 83'000 parameters/day)
- Code and phase data for ground stations, only phase data for Genesis, currently only nadir antenna (\rightarrow about 1'800'000 observations/day)




Procedures: Kobel et al. (2024),
DOI 10.1016/j.asr.2024.04.015

u^b “Zero” test: Coordinates

PPP (only estimate station-related parameters) using CODE final GNSS products and the correct PCVs. Differences to “true” coordinates:


Overall RMS in N/E/U: 3.29/3.25/2.93 mm

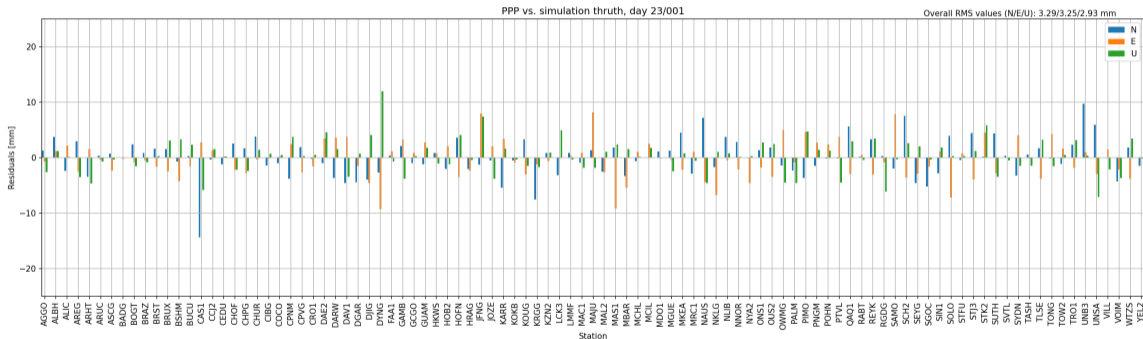

Same order of magnitude as differences between different IGS ACs (e.g., 4.10/3.32/2.76 mm for CODE vs. ESA) → realistic model uncertainties

u^b “Zero” test: Genesis orbit


Genesis POD using CODE final GNSS products and the correct PCVs. Differences to “true” Genesis orbit:

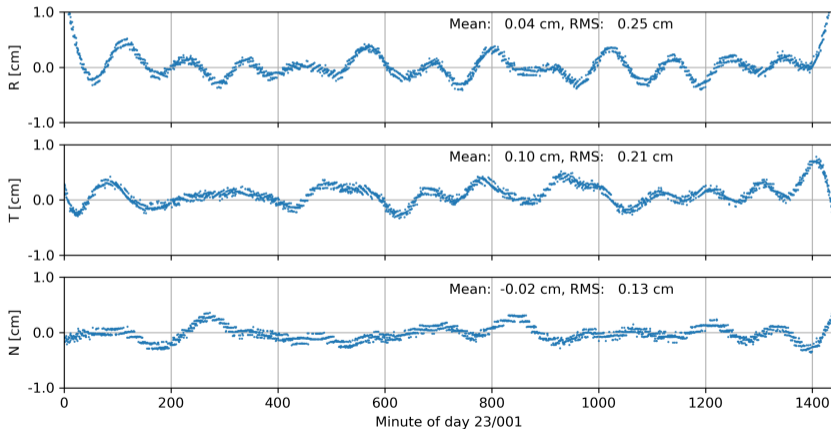

u^b

Full parameter estimation

Differences of estimated GPS orbits compared to “true” orbits, using correct PCVs:

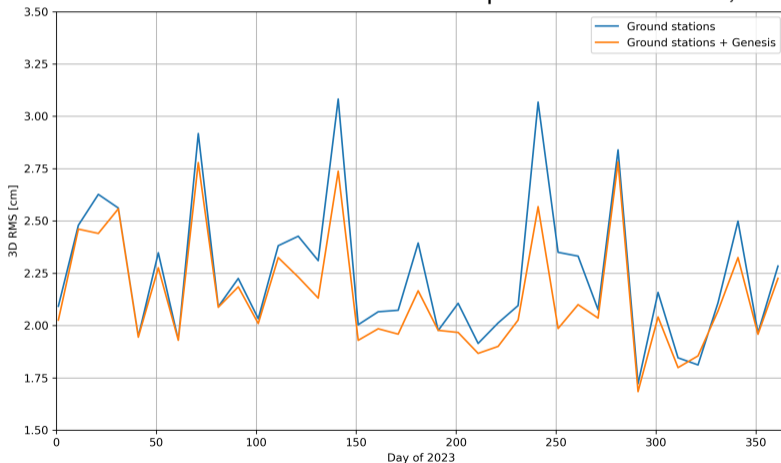


Notice: The “true” orbits (CODE) are 3-day orbits, while here only 1-day orbits are computed.

u^b

Phase pattern errors

Derive transmitter phase pattern errors by scaling differences of single patterns w.r.t. block-specific mean values:

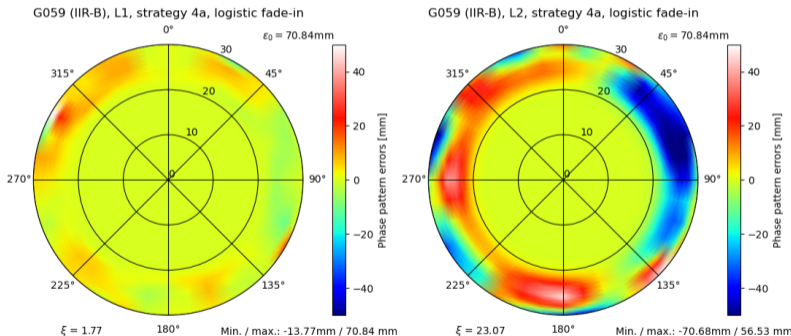


Errors zero for small nadir angles.

Add these pattern errors to the true transmit PCVs in the parameter estimation

u^b

Impact on recovered GNSS orbits


Differences of estimated GPS orbits compared to “true” orbits:

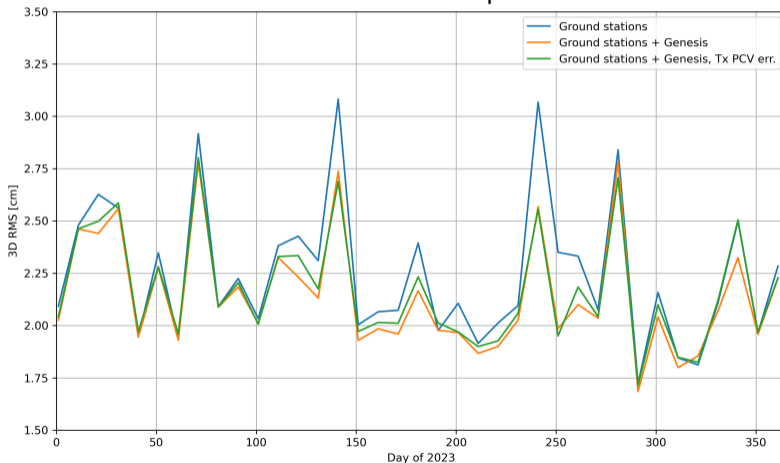

Slight degradation of GNSS orbits

u^b Geocenter formal errors

Formal errors for the geocenter z coordinates:

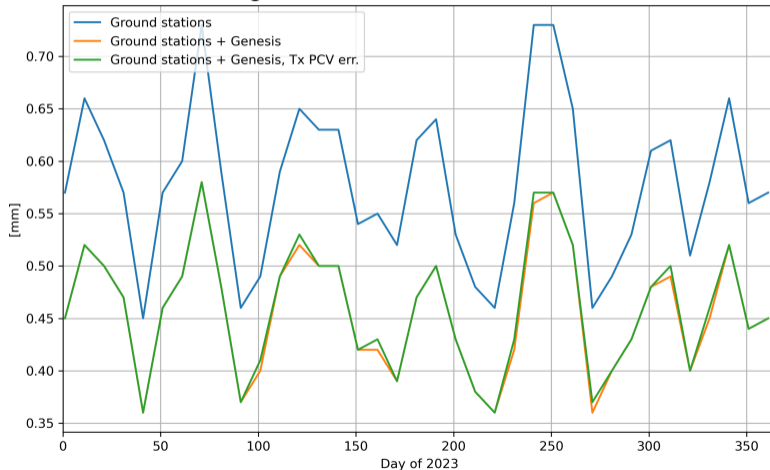

Adding Genesis helps, transmit phase pattern errors do not have a large impact.

Conclusions

- The GNSS tracking of Genesis is less straightforward than for LEOs
- Established a simulation framework to study impact of systematic GNSS modeling errors on orbit and global solutions
- Realistic GNSS transmit phase pattern errors have a small detrimental effect on GNSS (and Genesis) orbits
- Further systematic analysis for other parameters...

Thank you!

Contact: daniel.arnold@unibe.ch