



**IGS** INTERNATIONAL  
G N S S SERVICE

**TECHNICAL REPORT**  
**2025**



**EDITORS**  
ROLF DACH  
ELMAR BROCKMANN

**ASTRONOMICAL INSTITUTE**  
**UNIVERSITY OF BERN**



**International GNSS Service**



**International Association of Geodesy  
International Union of Geodesy and Geophysics**



**UNIVERSITÄT  
BERN**

**Astronomical Institute, University of Bern**  
Bern, Switzerland  
Compiled in March 2026, by Rolf Dach and Elmar Brockmann (Eds.)



IGS

INTERNATIONAL  
GNSS SERVICE

## Technical Report 2025

IGS Central Bureau

<https://www.igs.org>

Editors: R. Dach, E. Brockmann  
Astronomical Institute, University of Bern

Published in May 2026

## **IGS Central Bureau**

Jet Propulsion Laboratory, M/S 238–540  
4800 Oak Grove Drive  
Pasadena, CA 91109–8099, USA

E-mail: [cb@igs.org](mailto:cb@igs.org)

Website: <https://www.igs.org>

## **IGS Technical Report 2025**

ISSN: 2297-8526

ISBN: 978-3-03917-092-0; University of Bern, Bern Open Publishing.

DOI: 10.48620/93805

Cite as:

Dach, R., Brockmann, E. (eds.) (2025). *International GNSS Service Technical Report 2025 (IGS Annual Report)*. IGS Central Bureau and University of Bern; Bern Open Publishing  
DOI [10.48620/93805](https://doi.org/10.48620/93805)

Copyright © IGS Central Bureau and Astronomical Institute, University of Bern



This is an open access book licensed under a Creative Commons Attribution 4.0 International license (CC BY 4.0). This license allows anyone to download, share, reuse, reprint, adapt, distribute, and/or copy the work providing the original authors and source are credited. No permission is required from the authors or the publisher. Further details about CC BY licenses are available at <https://creativecommons.org/licenses/by/4.0/>

# Abstract

Applications of the Global Navigation Satellite Systems (GNSS) to Earth Sciences are numerous. The International GNSS Service (IGS), a voluntary federation of government agencies, universities and research institutions, combines GNSS resources and expertise to provide the highest-quality GNSS data, products, and services in order to support high-precision applications for GNSS-related research and engineering activities. This *IGS Technical Report 2025* includes contributions from the IGS Governing Board, the Central Bureau, Analysis Centers, Data Centers, station and network operators, committees, pilot projects, and others highlighting status and important activities, changes and results that took place and were achieved during 2025.

This report is available in electronic version at  
[https://files.igs.org/pub/resource/technical\\_reports/2025\\_techreport.pdf](https://files.igs.org/pub/resource/technical_reports/2025_techreport.pdf).

**The IGS wants to thank all contributing institutions operating network stations, Data Centers, or Analysis Centers for supporting the IGS. All contributions are welcome. They guarantee the success of the IGS also in future.**



# Contents

<b>I</b>	<b>Executive Reports</b>	<b>1</b>
	<b>Governing Board</b>	<b>3</b>
	<i>R. Dach, E. D’Anastasio, C. Martire</i>	
	<b>Central Bureau</b>	<b>19</b>
	<i>C. Martire, D. Maggert, R. Khachikyan, M. A. Figueroa Berroca</i>	
<b>II</b>	<b>Analysis Centers</b>	<b>29</b>
	<b>Analysis Center Coordinator</b>	<b>31</b>
	<i>S. Masoumi, T. Herring, T. Yates</i>	
	<b>Wuhan Combination Center</b>	<b>47</b>
	<i>J. Geng, Q. Wen, Y. Zhang, B. Wang</i>	
	<b>Center for Orbit Determination In Europe</b>	<b>65</b>
	<i>R. Dach, D. Arnold, E. Brockmann, M. Kalarus, C. Kobel M. Lasser, U. Meyer, S. Schaer, P. Stebler, A. Jäggi, A. Villiger, D. Ineichen, S. Lutz, L. Prange, D. Thaller, L. Klemm, S. Modiri, A. Rülke, W. Söhne, J. Bowman, U. Hugentobler, B. Duan</i>	

<b>ESA/ESOC IGS Analysis Centre</b>	<b>85</b>
<i>V. Mayer, T. Springer, M. van Kints, B. Traiser, I. Romero, I. Sermanoukian Molina, F. Gini, F. Zimmermann, E. Schönemann</i>	
<b>GeoForschungsZentrum</b>	<b>93</b>
<i>B. Männel, Z. Deng, A. Brack, T. Nischan, A. Brandt, M. Bradke, M. Ramatschi</i>	
<b>Centre National d'Etudes Spatiales/Collecte Localisation Satellites</b>	<b>99</b>
<i>S. Loyer, G. Katsigianni, A. Baños Garcia, A. Mezerette, E. Saquet, A. Naouri, A. Santamaria Gomez, F. Perosanz, F. Mercier, A. Couhert, J. C. Marty</i>	
<b>GSI and JAXA</b>	<b>107</b>
<i>K. Akiyama, T. Miyazaki, S. Abe, K. Kawate, Y. Igarashi, T. Sasaki, E. Imada, H. Takiguchi, T. Nagano, S. Kogure, K. Yoshinaga, M. Yokokawa, B. Miyahara</i>	
<b>Jet Propulsion Laboratory</b>	<b>115</b>
<i>P. Ries, W. Bertiger, D. Hemberger, A. Komanduru, D. Murphy, A. Peidou, A. Sibthorpe</i>	
<b>Massachusetts Institute of Technology</b>	<b>121</b>
<i>T. Herring</i>	
<b>National Geodetic Survey</b>	<b>129</b>
<i>J. Jones, P. McFarland</i>	
<b>Natural Resources Canada</b>	<b>135</b>
<i>S. Banville, S. Elson, R. Ghoddousi-Fard, O. Kamali, P. Lamothe, E. Maia, Y. Mireault, T. Nikolaidou</i>	

**Scripps Institution of Oceanography**

*No report submitted*

**United States Naval Observatory** 147

*S. Byram, J. Crefton, E. Lovegrove*

**Wuhan University** 153

*M. Li, N. Wei, L. Fan, Y. Zhou, Q. Zhao, C. Shi*

**EUREF Permanent Network Associate Analysis Centre** 163

*C. Bruyninx, A. Kenyeres, J. Legrand, T. Liwosz,  
R. Pacione, W. Söhne, C. Völkse*

**SIRGAS Regional Network Associate Analysis Centre** 171

*JA. Tarrío, C. Cáceres, V. Mackern, C. Cunha Santos da Silva,  
N. Ribas Júni, M. Alexandre de Abreu, L. Sánchez*

**III Data Centers** 183

**Infrastructure Committee** 185

*M. Bradke, R. Ruddick, D. Maggert, W. Söhne*

**Crustal Dynamics Data Information System** 191

*P. Michael*

**The GNSS Science Support Centre (GSSC)** 203

*J.C. Berton, S. del Rio García, N. Castrillo Merlán,  
E. Schönemann, J. Ventura-Traveset, E. Montagnon*

**Institut National de l'Information Géographique et Forestière**

*No report submitted*

**Korean Astronomy and Space Science Institute**

*No report submitted*

**Scripps Institution of Oceanography**

*No report submitted*

**Wuhan University** 215

*M. Li, Q. Zhao*

**BKG Regional Data Center** 219

*W. Söhne, P. Neumaier, J. Schmidt, E. Wiesensarter, A. Stürze, A. Rülke*

## **iv Committees, Pilot Projects, Working Groups** 227

**Antenna Product Committee** 229

*T. Kersten, A. Villiger*

**Bias and Ambiguity Resolution Committee** 235

*J. Geng, Q. Wen, S. Banville, Q. Wu, Y. Wang, S. Lyu*

**Clock Products Committee** 249

*M. J. Coleman*

**GNSS Monitoring Pilot Project** 255

*E. Schönemann*

**Ionosphere Product Committee** 257

*A. Krankowski, Z. Li, M. Hernández-Pajares,  
A. Froň, K. Kotulak, P. Flisek*

<b>Multi-GNSS Pilot Project</b>	<b>263</b>
<i>P. Steigenberger, K. Akiyama, O. Montenbruck</i>	
<b>Real-Time Product Committee</b>	<b>271</b>
<i>A. Rülke, N. Wang, A. Stürze</i>	
<b>Reference Frame Product Committee</b>	<b>287</b>
<i>P. Rebischung, M. de La Serre</i>	
<b>RINEX Committee</b>	<b>293</b>
<i>F. Gini, A. Hauschild</i>	
<b>Space Vehicle Orbit Dynamics Committee</b>	<b>295</b>
<i>B. Duan</i>	
<b>Tide Gauge Benchmark Monitoring Product Pilot Project</b>	<b>301</b>
<i>M. Gravelle, G. Wöppelmann</i>	
<b>Troposphere Product Committee</b>	<b>307</b>
<i>S. Byram</i>	
<b>Inclusion, Diversity, Equity, and Accessibility Working Group</b>	<b>311</b>
<i>E. D’Anastasio, R. Steffen, R. Dach, R. Ruddick</i>	



Part I  
Executive Reports



# IGS Governing Board Annual Report 2025

Rolf Dach<sup>1</sup>, Elisabetta D’Anastasio<sup>2</sup>, Camille Martire<sup>3</sup>

- <sup>1</sup> IGS Governing Board Chair  
Astronomical Institute, University of Bern (Bern, Switzerland)
- <sup>2</sup> IGS Governing Board Vice Chair  
Earth Sciences New Zealand (Lower Hutt, New Zealand)
- <sup>3</sup> International GNSS Service Central Bureau Acting Director,  
Central Bureau Deputy Director, and Governing Board Executive Secretary;  
NASA Jet Propulsion Laboratory, California Institute of Technology  
(Pasadena, California, USA)

## 1 Introduction

The International GNSS Service (IGS, where GNSS stands for Global Navigation Satellite Systems) offers an operational service to science and society providing free and openly available fundamental, high-quality geodetic GNSS-based products (GNSS satellite orbits, clock corrections, contributions to the terrestrial reference frame, and Earth rotation parameters). These activities have been on-going since the IGS’ inception. Over the past three decades, IGS has extended its activities to a number of applications based on GNSS data, supporting weather monitoring, ionosphere characterization, geodynamic or sea level change studies.

At the same time, the IGS also reduced the latency of its products: the development started with a final series with a latency of two weeks where a rapid series was quickly added with a latency of less than one day. Since the year 2000 an ultra-rapid product line has also been generated, with four updates per day at a latency of only 3 hours, including an orbit prediction of 24 hours. Finally, the IGS Real-Time Service (RTS) became operational in April 2013.

It is in particular remarkable that all these activities have been conducted on a voluntary basis by a collective effort from many contributing agencies and institutions around the world. The quality of IGS products has continuously improved over time, and is nowadays a demonstration of the tremendous effort invested by the many people worldwide who provide the necessary work for the IGS. A guiding principle since the beginning of IGS

was (and still is) the free access to high-precision GNSS data and products and an open exchange of experience and knowledge. The IGS is currently on the path towards a full multi-GNSS service with new multi-GNSS stations in the core network, extending the receiver antenna calibrations to new frequencies, and including all GNSS signals in the product generation. Several groups within the IGS community are currently working on developing a full multi-GNSS product combination for generating orbits and satellite clock products. This will be the last step of significant efforts towards a multi-GNSS service.

The IGS is led by the Governing Board (GB), elected by Associate Members (AMs) who represent the IGS community. The GB discusses the activities of the various IGS components, sets policies and monitors the progress with respect to the agreed strategic plan and annual implementation plan.

The GB continues to engage with our International User Community and their partner organisations, including the International Association of Geodesy (IAG), the International Committee on GNSS (ICG), and the Global Geodetic Observing System (GGOS). Accordingly, some GB members also participate in the governance of IAG and GGOS bureaux, commissions, and Working Groups (WGs); this ensures that the IGS retains its strong level of international interconnectivity, significance, and sustainability. Importantly, GB members also participate in the United Nations Global Geospatial Information Management (UN-GGIM) and United Nations Global Geodetic Centre of Excellence (UN-GGCE) efforts on Geodesy, which aims to enhance the sustainability of the global geodetic reference frame through intergovernmental advocacy for geodesy.

The IGS GB typically holds one in-person meeting per year aligned with key IUGG, IAG, and/or IGS conferences and workshops. Furthermore, the GB was happy to return to in-person community workshops, especially on the occasion of celebrating 30 years of operations with an IGS Symposium and Workshop in July 2024 in Bern, Switzerland.

## **2 Membership and Governance**

### **2.1 Membership Growth and Internal Engagement**

The IGS membership consists of the Governing Board (GB) members, the Central Bureau (CB) members, and the Associate Members (AM). At the end of 2024, IGS counted over:

- 300 AMs (representing 46 countries/regions),
- 150+ contributing organizations participating within the IGS, including:
  - 100+ agencies operating GNSS Network Tracking Stations,
  - 6 Global Data Centers,
  - 13 Analysis Centers,
  - 31 Associate Analysis Centers,

- 5 Product Coordinators,
- 22 Regional/Operational & Project Data Centers,
- 10 Committees
- 4 Pilot Projects, and
- 1 Working Group.

The [Governing Board](#)'s 53 members guide the coordination of all of the aforementioned parties. The [Central Bureau](#)'s 7 members function as the executive office of the Service holding all of the components of the IGS together by providing continuous management, technological support, and coordination of the IGS Information Systems, website, and outreach activities (see also the Central Bureau's Executive Report).

## 2.2 Current Status of the IGS Governing Board

The GB continues to be led by Rolf Dach (AIUB, Switzerland) in collaboration with GB Vice-Chair Elisabetta D'Anastasio (Earth Science New Zealand, New Zealand). Allison Craddock (NASA JPL, USA) continued her appointment as CB Director in collaboration with CB Deputy Director Camille Martire (NASA JPL, USA) until she stepped down in August 2025. [Table 1](#) summarises the status of the Governing Board membership at the end of this year. [Table 2](#) lists the IGS Component Vice-Chairs, who are de facto deputies to the corresponding IGS Component Chairs; they are not official members of the GB but play an important role in supporting it.

**Table 1:** Members of the IGS Governing Board as of January 2025.

Involvement is either of the following:

V if voting member, EC if member of the Executive Committee; observer otherwise.

Role	Name	Affiliation	Country	V	EC
Board Chair	Rolf Dach	Astronomical Institute, University of Bern	Switzerland	V	EC
Board Vice Chair	Elisabetta D’Anastasio	Earth Sciences New Zealand	New Zealand	V	EC
<b>CB Director*</b>	Allison Craddock	NASA Jet Propulsion Laboratory	USA	V	EC
<b>CB Acting Director*</b>	Camille Martire	NASA Jet Propulsion Laboratory	USA	V	EC
CB Deputy Director*	Camille Martire	NASA Jet Propulsion Laboratory	USA		EC
GB Executive Secretary	Camille Martire	NASA Jet Propulsion Laboratory	USA		EC
Network Coordinator	David Maggert	Earthscope Consortium	USA		
AC Coordinator (ACC)	Taylor Yates	NASA Goddard Space Flight Center (GSFC)	USA	V	EC
AC Coordinator (ACC)	Thomas Herring	Massachusetts Institute of Technology (MIT)	USA	V	EC
AC Coordinator (ACC)	Salim Masoumi	Geoscience Australia	Australia		
AC Representative	<b><i>Simon Banville</i></b>	NRCan - Natural Resources Canada	Canada	V	
AC Representative	Sylvain Loyer	Collecte Localisation Satellites (CLS)	France	V	
AC Representative	Benjamin Männel	GFZ Helmholtz Centre for Geosciences	Germany	V	
DC Coordinator*	<b><i>Benjamin “Pat” Michael</i></b>	NASA Goddard Space Flight Center (GSFC)	USA		
DC Representative	<b><i>Chaminda Senavirathne</i></b>	SULECO	Sri Lanka	V	
Network Representative	Rui Fernandes	University of Beira Interior (UBI); Institute Dom Luiz (IDL); SEGAL (UBI/IDL)	Portugal	V	
Network Representative	Ryan Ruddick	Geoscience Australia	Australia	V	EC
Network Representative	Wolfgang Söhne	Federal Agency for Cartography and Geodesy (BKG)	Germany	V	
Appointed Member	<b><i>Kyohei Akiyama</i></b>	National Space Policy Secretariat (NSPS), Cabinet Office	Japan	V	
Appointed Member	Fernand Balé	Bureau National d’Etudes Techniques et de Développement	Côte d’Ivoire	V	
Appointed Member	Neelu Kasat	ISRO/ISTRAC - ISRO / Telemetry Tracking and Command Network	India	V	
Appointed Member	Babatunde Rabiú	NSRDA - National Space Research and Development Agency	Nigeria	V	
Appointed Member	José Antonio Tarrío Mosquera	University of Santiago de Chile (USACH)	Chile	V	
Appointed Member	<b><i>vacant</i></b>	n/a	n/a	V	

Changes since the last IGS Technical Report are font-coded: structural changes are in **bold**, new GB members are in **bold italic**. The \* denote specific cases, with explanations detailed in the main text.

**Table 1:** Members of the IGS Governing Board, as of January 2025 (cont.)

Involvement is either of the following:

V if voting member, EC if member of the Executive Committee; observer otherwise.

Role	Name	Affiliation	Country	V	EC
Antenna Committee Chair	Arturo Villiger	Federal Office of Topography swisstopo	Switzerland	V	
<b>Bias and Ambiguity Resolution Committee Chair</b>	<b>Jianghui Geng</b>	Wuhan University	China	V	
<b>Bias &amp; Calibration Committee Chair</b>	<b>DISCONTINUED*</b>	n/a	n/a	n/a	
Clock Products Committee Coordinator	Michael Coleman	Naval Research Laboratory (NRL)	USA	V	
Infrastructure Committee Coordinator	Markus Bradke	GFZ Helmholtz Centre for Geosciences	Germany	V	EC
Ionosphere Committee Chair	Andrzej Krankowski	University of Warmia and Mazury in Olsztyn	Poland	V	
Real-Time Committee Chair	Axel Rülke	Federal Agency for Cartography and Geodesy (BKG)	Germany	V	
Reference Frame Committee Chair	Paul Rebischung	Institut National de l'Information Géographique et Forestière (IGN)	France	V	
RINEX-RTCM Committee Chair	Francesco Gini	ESA/European Space Operations Centre (ESOC)	Germany	V	
SVOD Committee Chair	Bingbing Duan	TUM - Technische Universität München	Germany	V	
Troposphere Committee Chair	Sharyl Byram	United States Naval Observatory	USA	V	
GNSS Monitoring Pilot Project Chair	Erik Schönemann	European Space Agency / European Space Operations Centre	Germany	V	
Multi-GNSS Pilot Project Chair	Peter Steigenberger	Deutsches Zentrum für Luft- und Raumfahrt (DLR)	Germany	V	
<b>PPP-AR Pilot Project Chair</b>	<b>DISCONTINUED*</b>	n/a	n/a	n/a	
TIGA Pilot Project Chair	<i>Médéric Gravelle &amp; Guy Wöppelmann</i>	ULR - Université de La Rochelle	France	V	
<b>Wuhan Combination Centre Pilot Project</b>	<b><i>Jianghui Geng</i></b>	Wuhan University	China	V	
<b>DOI &amp; Data Licensing Working Group</b>	<b><i>Kirsten Elger</i></b>	GFZ Helmholtz Centre for Geosciences	Germany		
IDEA Working Group Co-Chairs	<b><i>Elisabetta D'Anastasio</i></b>	Earth Sciences New Zealand	New Zealand		
Real-Time AC Coordinator	Andrea Stürze	Federal Agency for Cartography and Geodesy (BKG)	Germany		*
IGS Representative to IERS	Elisabetta D'Anastasio	Earth Sciences New Zealand	New Zealand	V	
IGS Representative to IERS	Rolf Dach	Astronomical Institute, University of Bern	Switzerland	V	
BIPM Representative to the IGS	Patrizia Tavella	Bureau International des Poids et Mesures (BIPM)	France		
FIG Representative to the IGS	Ryan Keenan	Positioning Insights	Australia		
IERS Representative to the IGS	Zuheir Altamimi	Institut National de l'Information Géographique et Forestière (IGN)	France	V	7
GGOS President	Laura Sánchez	Deutsches Geodätisches Forschungsinstitut, Technische Universität München (DGFI-TUM)	Germany	V	
IAG President	Richard Gross	NASA Jet Propulsion Laboratory	USA	V	

Changes since the last IGS Technical Report are coded: structural changes are in **bold**, new GB members are in **bold italic**. The \* denote specific cases, with explanations detailed in the main text.

**Table 2:** IGS Component Vice-Chairs as of January 2025.

IGS Component Chair	Vice	Name	Affiliation	Country
Antenna Committee		Tobias Kersten	Leibniz Universität Hannover	Germany
<b>Bias and Ambiguity Resolution Committee</b>		<b><i>Lotfi Massarweh</i></b>	DUT - Delft University of Technology	Netherlands
<b>Bias &amp; Calibration Committee</b>		<b>DISCONTINUED*</b>	n/a	n/a
Clock Products Committee		<b><i>Jian Yao</i></b>	SLU - Saint Louis University	USA
Infrastructure Committee		Ryan Ruddick	GA - Geoscience Australia	Australia
Ionosphere Committee		Zishen Li	CAS - Chinese Academy of Sciences	China
Real-Time Committee		Ningbo Wang	CAS - Chinese Academy of Sciences	China
Reference Frame Committee		<b><i>Maylis De La Serve</i></b>	IGN - Institut National de l'Information Géographique et Forestière	France
RINEX-RTCM Committee		André Hauschild	DLR - Deutsches Zentrum für Luft- und Raumfahrt	Germany
SVOD Committee		vacant	n/a	n/a
<b>TIGA Pilot Project</b>		No Vice-Chair since	the Pilot Project is chaired by 2	Co-Chairs
Troposphere Committee		<b><i>Rosa Pacione</i></b>	e-GEOS - Agenzia Spaziale Italiana / Telespazio	Italy
GNSS Monitoring		<b><i>Katarina Lutz-Lloyd</i></b>	DLR - Deutsches Zentrum für Luft- und Raumfahrt	
IDEA Working Group		vacant	n/a	n/a
Multi-GNSS Pilot Project		Kyohei Akiyama	JAXA - Japan Aerospace Exploration Agency	Japan
<b>PPP-AR Pilot Project</b>		<b>DISCONTINUED*</b>	n/a	n/a

IGS Component Vice-Chairs as of January 2026. Changes since the last IGS Technical Report are font-coded: new Vice-Chairs are in ***bold italic***. The \* denote specific cases, with explanations detailed in the main text. Vice-Chairs are not official members of the GB but play an important role in supporting it.

Ross Bagwell (NASA GSFC - Goddard Space Flight Center) was replaced by Benjamin P. “Pat” Michael (NASA GSFC) in the position of Data Centre Coordinator in February 2026, due to an out-of-cycle election, due to organisational constraints and delays beyond the IGS Standing Elections Committee’s control. Chaminda Senavirathne (SULECO, Sri Lanka) was elected as Data Center Representative (1st term), replacing Jianghui Geng (Wuhan University). Simon Banville (NRCan - Natural Resources Canada) was elected as AC Representative, replacing Paul Ries (NASA JPL - Jet Propulsion Laboratory). Rui Fernandes (UBI - University of Beira Interior) was renewed as Network Representative.

The Bias & Calibration Committee merged with the PPP-AR Pilot Project to create the Bias & Ambiguity Resolution Committee, led by Chair Jianghui Geng (Wuhan University) and Vice-Chair Lotfi Massarweh (DUT - Delft University of Technology); Stefan Schaer stepped down from the position of Bias & Calibration Chair. Médéric Gravelle and Guy Wöppelmann (ULR - Université de La Rochelle) were approved as the new Co-Chairs of the TIGA Pilot Project, sharing one single vote; there is no Vice-Chair for the TIGA Pilot Project since it is chaired by 2 Co-Chairs. Sharyl Byram (USNO) was renewed as Troposphere Committee Chair.

As established in the 2024 Technical Report, the licensing and citation of IGS data has become a very important topic for the sustainability of the Service. In 2025, two ad-hoc Working Groups, on DOI and Data Licensing respectively, were created. Chair Kirsten Elger (GFZ - Deutsches GeoForschungsZentrum) and Co-Chair Ross Bagwell (NASA GSFC) led the work towards establishing IGS-wide policies to support the correct licensing and citation of our data and products, which will eventually contribute to the sustainability of the IGS and to accurately acknowledging the contributions from its many international collaborators.

Werner Enderle (ESA/ESOC - ESA / European Space Operations Centre) and Satoshi Kogure (NSPS - National Space Policy Secretariat) both stepped down from the position of Appointed Members. Kyohei Akiyama (JAXA - Japan Aerospace Exploration Agency) was elected as Appointed Member. Fernand Balé (BNETD) was renewed as Appointed Member.

In 2025, the Governing Board further improved the Service’s overall sustainability by establishing two new Vice-Chairs for the Clock Products Committee and GNSS Monitoring Pilot Project, and by securing a new long-term Vice-Chair for the Reference Frame Committee. We recognise here their contribution to the IGS and welcome their help in safeguarding the future of these IGS Components.

Jian Yao (SLU - Saint Louis University) was approved as the first Vice-Chair of the Clock Products Committee. Maylis De La Serve (IGN - Institut National de l’Information Géographique et Forestière) replaced Samuel Branchu (IGN) as Vice-Chair of the Reference Frame Committee. Katarina Lutz-Lloyd was elected Vice-Chair of the GNSS Monitoring Pilot Project.

### 3 Governing Board Elections Coordination

The Standing Election Committee (SEC) is responsible for the yearly GB Elections and is supported by the Central Bureau (CB). Together, the CB and SEC nominated and vetted the various candidates, coordinated the call for nomination within the AMs, contacted and coordinated with people whose terms were up for renewal, worked with the EC for pre-approvals when relevant, and handled the end-of-term cases when applicable.

In 2025, the composition of the SEC remained unchanged, consisting of Elisabetta D’Anastasio (Earth Sciences New Zealand, New Zealand) as the chair and Ryan Keenan (Positioning Insights, Australia), Wolfgang Söhne (BKG, Germany), Benjamin Männel (GFZ, Germany), and Camille Martire (NASA JPL, USA) as members.

This year, the SEC handled all positions up for elections/reelections and continued to reach out to IGS Components without a Vice-Chair. Important positions had to be renewed, e.g., the Network Coordinator or the Troposphere Committee Chair. One Data Center Representatives and one Analysis Center Representative as well as one out of three Networks Representatives had to be elected and the SEC was successful in enhancing engagement activities in regions not represented in the IGS so far with Chaminda Senavirathne from Sri Lanka. Full details on the resulting GB composition changes are given in Tables 1 and 2 of this report.

### 4 Governing Board Decisions

The past accomplishments and decisions can be found in the previous Technical Reports (<https://igs.org/tech-report/>). The accomplishments and decisions for 2025 are listed below:

- **GB 69 (January 2025)**

- Decision 69-01:** The v2.2 of the Guidelines for Long Product Filenames was approved.

- Decision 69-02:** The GGOS DOI WG Recommendations were approved as foundation for the IGS DOI Policy (subject to additional discussion and adjustments).

- **GB70 (May 2025)**

- Decision 70-01:** Médéric Gravelle and Guy Wöppelmann (ULR, France) were approved as the new Co-Chairs of the TIGA Pilot Project.

- Decision 70-02:** Jian Yao was approved as the first Vice-Chair of the Clock Products Committee.

- Decision 70-03:** The 2026 IGS Workshop shall take place from the 1st to the 5th of June 2026. An in-person Governing Board meeting shall take place on the 31st of May 2026.

- Decision 70-04:** The 2026 IGS Workshop shall take place in-person, with a potential

one-way broadcast to allow remote participants to attend presentations.

**Decision 70-05:** The Bias & Calibration Committee and the PPP-AR Pilot Project merge into a single, combined IGS Committee. The exact name of that Committee remains to be consolidated by Action 70-02.

**Decision 70-06:** RDAAC-IRIS shall be removed from the list of IGS Regional Data Centres.

**Decision 70-07:** The v1.0 of the WCC Pilot Project Charter was approved.

- **GB71 (August 2025)**

**Decision 71-01:** The August 2025 Revision of the Real-Time Committee Charter was approved.

**Decision 71-02:** The August 2025 Revision of the RINEX v4.02 standard was approved.

**Decision 71-03:** Katharina Lutz-Lloyd was approved as the new Vice-Chair of the GNSS Monitoring Pilot Project.

**Decision 71-04:** The JGX proposal to host the 2028 IGS Workshop in Tsukuba, Ibaraki (Japan) in September 2028 was approved.

**Decision 71-05:** Following the departure of former CB Director Allison Craddock, the responsibilities of the CB Director are transferred to the current CB Deputy Director, Camille Martire, until a new CB Director is nominated by NASA, the organization currently hosting the CB. With these additional responsibilities, Camille Martire formally assumes the role of CB Acting Director.

**Decision 71-06:** The Committee stemming from the merge between the Bias & Calibration Committee and the PPP-AR Pilot Project shall be named Bias and Ambiguity Resolution (BAR) Committee.

- **GB72 (December 2025)**

**Decision 72-01:** The Charter for IGS Data Centres v1.0 was approved.

**Decision 72-02:** The IGS CORS Management Policy v1.0 was approved.

**Decision 72-03:** The Bias & Ambiguity Resolution Committee Charter (v250906) was approved.

**Decision 72-04:** The ANTEX v2.0 Format was approved.

**Decision 72-05:** Kyohei Akiyama was elected as Appointed Member (1st term).

**Decision 72-06:** Fernand Balé was re-elected as Appointed Member (2nd term).

**Decision 72-07:** Sharyl Byram was re-elected as Troposphere Committee Chair.

**Decision 72-08:** Simon Banville was elected Analysis Centre Representative.

**Decision 72-09:** Chaminda Senavirathne was re-elected Data Centre Representative

**Decision 72-10:** Rui Fernandes was re-elected as Network Representative.

**Decision 72-11:** The creation of the Signal-in-Space Standardization Task-Force under the umbrella of the RINEX Committee was approved.

**Decision 72-12:** Rui Fernandes shall Chair the Standing Elections Committee going forward.



## 5.2 Analysis Centre Coordinator Transition

The new Analysis Center Coordinator (ACC) was selected and announced at the IGS Workshop in July 2024. This new ACC team is a NASA/GA + MIT/GFZ partnership that combines the strengths of multiple organisations, including the experience of the current GA+MIT team, in service to the IGS. With this new arrangement, the ACC team currently consists of Taylor Yates (NASA GSFC), Salim Masoumi (GA), and Tom Herring (MIT). The primary focus for this new team in 2025 was the training and transition of primary operations from GA to NASA. A strong effort was also made towards the development of multi-GNSS product combinations.

NASA and MIT staff visited GA in early 2025 for in-person training of the NASA staff and started the transition process for the ACC primary operations. During the rest of the year, work continued with regular online training and hand-over of the operations. There was a delay in starting the parallel processing between NASA and GA, and consequently in the handover of the operations, compared to the initial plan. However, the work is underway and the transition of the operational responsibility for generating the combined IGS products is expected to occur by July 2026.

## 5.3 Analysis Centre Coordination and Multi-GNSS Product Generation

While the transition of primary operations was underway in 2025, the legacy operations remained based at Geoscience Australia in Canberra (Australia), while the combination software remained housed on cloud-based servers located in Australia and Europe. Cloud operations ran smoothly throughout the year, and the IGS continues to maintain a very high level of product availability. For more details, see the Analysis Center Coordinator Report.

In 2025, a significant effort was made towards providing IGS multi-GNSS combined products. The IGS ACC continued provision of multi-GNSS ultra-rapid orbit combinations as demonstration products. These ultra-rapid orbits are combinations of GPS, Galileo and GLONASS orbits provided by the IGS Analysis Centres. The ACC also participated in a Task Force with the Multi-GNSS Pilot Project, with the goal of preparing and forming the future of the multi-GNSS combined products. This Task Force was disbanded after providing assessments of different combination software available for the IGS' multi-GNSS products.

In addition to the ultra-rapid products, the IGS ACC started testing and processing multi-GNSS combined orbits, clocks, biases, and reference attitudes for the Final products, and is planning to release the set of Final products for the period from the end of Repro3 campaign to the current date in early 2026. This will be followed by regularly providing multi-GNSS Final combined products as demonstration products until they replace the legacy products.

## 5.4 IGS Reference Frame Updates

The generation of the daily, weekly, and long-term IGS terrestrial frame solutions (SINEX) continued to be carried out seamlessly by IGN throughout the year.

Following the release of the second annual update of ITRF2020, called ITRF2020-u2024, in September 2025 ([IGSMAIL #8619](#)), an updated IGS reference frame was defined. Called IGc20, it has been adopted for the alignment of the IGS products starting with the products of GPS week 2401 (11 January 2026). More details on this new IGc20 reference frame and its usage may be found in [IGSMAIL #8634](#).

The campaign for the calibration of the BDS-3 and QZSS satellite antennas, jointly coordinated by the Reference Frame Committee, Multi-GNSS Pilot Project, and Antenna Committee, was finalised. The IGS ANTEX file ([igs20.atx](#)) was updated on GPS week 2405 with the BDS-3 and QZSS satellite antenna phase variation patterns and phase center offsets, determined during this campaign and compatible with the IGS20 reference frame. This opens the way for a seamless incorporation of the BDS-3 and QZSS constellations into the IGS operational processing, and completes another of the objectives set forth in previous Technical Reports.

## 5.5 Data Management

The International GNSS Service (IGS) relies on a robust, collaborative network to generate its high-precision products. Currently, 13 Analysis Centers and 21 Associate Analysis Centers process tracking data from a vast global network, utilizing anywhere from 70 to over 500 individual tracking stations. By constantly analyzing this data, these centers generate precision products up to four times every day.

To ensure the highest level of accuracy and reliability for end-users, dedicated product coordinators continuously merge and rigorously quality-check these outputs. The scale of this daily and weekly production is substantial; collectively, the IGS generates more than 1000 product files a day. These encompass time-critical and system-specific data (such as final, rapid, ultra-rapid, and GLONASS-only files) along with weekly ionosphere files and daily troposphere files covering more than 400 stations. Throughout these efforts, the organization has maintained the steady, reliable delivery of its fundamental products, including the core reference frame, precise satellite orbits, clocks, and atmospheric models. Furthermore, the IGS continues to modernize its capabilities by refining its Real-Time Service, dedicating considerable effort toward developing robust standards to ensure seamless data integration for users worldwide.

In total, this collaborative operation leverages 34 Analysis Centers and hundreds of tracking stations to deliver over 1000 specialized files every day.

The intense interest in IGS data and products is clearly reflected in the massive user

activity and file distribution volumes recorded across the various IGS Global and Regional Data Centers. Currently, the core IGS data and products span over 150 terabytes in volume, comprising more than 475 million files. To ensure high availability and seamless global access, these files are strategically available across multiple data centers. This distributed architecture allows for efficient worldwide dissemination without overloading any single facility, while also providing limited system redundancy to safeguard the data.

The scale of this global engagement is particularly evident at the Crustal Dynamics Data Information System (CDDIS) at NASA’s Goddard Space Flight Center. The facility supports an expansive scientific community, boasting over 150,000 registered users who regularly retrieve geodesy data via HTTPS protocols through the NASA Earthdata Login (EDL) system. Additionally, CDDIS caters to a sizable unregistered user base that accesses data through secure FTP (FTP-SSL) systems, ensuring flexible access for diverse user needs. The monthly throughput for IGS data and products alone is staggering: CDDIS averages around 160 million file downloads and 68 terabytes of distributed data, actively serving upwards of 15,000 users each month.

Other key nodes in the network also demonstrate substantial throughput. Furthermore, the Wuhan University Data Center has accumulated 40 terabytes of GNSS data and products to date. In 2025, its average monthly download volume reached 38 million GNSS data and product files (12.3 terabytes), reliably supporting 1,500 unique users. Together, these interconnected centers highlight the growing, critical reliance on IGS resources worldwide.

## 6 External Engagement

IGS is an Associate Member of the **International Committee on GNSS (ICG)**, based under the aegis of the **United Nations Office for Outer Space Affairs (UN OOSA)**. Namely, IGS co-chairs the ICG’s [Working Group D \(on “Reference Frames, Timing, and Applications”\)](#) alongside BIPM, CNES, FIG, IAG, and IGN. The ICG also hosts the International GNSS Monitoring and Assessment (IGMA) Task Force (TF), in which the IGS’ GNSS Monitoring Pilot Project holds a prime advisory role. At the 19th meeting of the ICG in October 2025, the IGS was represented by GB Member Richard Gross (NASA JPL, USA), with online support by CB Acting Director Camille Martire (NASA JPL, USA), while GNSS Monitoring Pilot Project Chair Erik Schönemann represented the IGS in the IGMA TF. The IGS reported significant progress during ICG-19, with details reported in the [ICG-19 Joint Statement](#). In particular, the IGS secured the publication by ICG of a [Statement on the Critical Role of the Global Geodesy Supply Chain for GNSS](#).

Additionally, at the direction of the Governing Board, the Central Bureau works with various components of the **International Association of Geodesy (IAG)** in order to promote communications and outreach. Finally, IGS Associate Members (AMs) and GB Members are also active participants in the **United Nations Initiative on Global**

**Geospatial Information Management (UN GGIM) Sub-Committee on Geodesy** ([http://ggim.un.org/UN\\_GGIM\\_wg1.html](http://ggim.un.org/UN_GGIM_wg1.html)). There were no significant contributions on these fronts in 2025, owing namely to the various transitions taking place during that year.

## **7 Future Steps for 2026**

The IGS will continue to follow stakeholders' expectations for improved product timeliness, fidelity, and multi-GNSS compliance. The GB, CB, and Associate Members will continue their efforts towards enhancing advocacy for the IGS. Members of the IGS will continue giving presentations at a variety of forums within our discipline and outside of it, ensuring that the efforts of all contributors are acknowledged. In this way, the IGS will continue to build its user base, resulting in enhanced sustainability overall.

A number of important initiatives are considered for 2026. The next IGS Symposium and Workshop will take place in June 2026, and incur in-depth preparation efforts in the months preceding, led namely by José Antonio Tarrío Mosquera (Local Organising Committee Chair), Gustavo Caubarrère (Scientific Organising Committee Chair) and Camille Martire and Mara Figueroa (Central Bureau). The previous ACC will hand over primary responsibilities to the current ACC mid-year, and will continue making progress toward fully multi-GNSS combinations. The Infrastructure Committee and Data Centre Coordinator will investigate ways to consolidate and improve sustainability, reliability, and redundancy of the IGS data infrastructures. The Governing Board as a whole will continue to work on the topics of Data Licensing and DOIs, as well as on the related pending considerations around the involvement of the private sector in the IGS. Many of the ACs will prepare for the upcoming ESA's Genesis mission (a well-calibrated platform in space tying the four space-geodetic techniques typically used to construct the International Terrestrial Reference Frame - namely GNSS, Satellite Laser Ranging, Very Long Baseline Interferometry, and Doppler Orbitography by Radiopositioning Integrated on Satellite). The topic of LEO-PNT (Low Earth Orbit Positioning Navigation and Timing) will be discussed and studied in depth, and whether the IGS can be of service in this up-and-coming field will be evaluated.

Finally, the GB thanks all participants within the IGS for the efforts, with particular thanks going to the Component Chairs and the former Central Bureau Director Allison Craddock, who ended their terms this year. Without the contributions of all, the IGS could not have achieved the significant outcomes detailed in this report.

## **8 Publications and Official IGS Citation**

Official publications pertaining to the IGS are:

- previous Technical Reports:
  - [IGS 2020 Technical Report](#)
  - [IGS 2021 Technical Report](#)
  - [IGS 2022 Technical Report](#)
  - [IGS 2023 Technical Report](#)
  - [IGS 2024 Technical Report](#)
- Terms of Reference:
  - [IGS 2019 Terms of Reference](#)
  - [IGS 2023 Terms of Reference](#)

It is expected that the IGS is properly acknowledged by referencing the IGS chapter found in the 2017 Springer Handbook of Global Navigation Satellite Systems:

Johnston, G., Riddell, A., Hausler, G. (2017). The International GNSS Service. In Teunissen, Peter J.G., and Montenbruck, O. (Eds.), Springer Handbook of Global Navigation Satellite Systems (1st ed., pp. 967-982). Cham, Switzerland: Springer International Publishing. DOI: [10.1007/978-3-319-42928-1](https://doi.org/10.1007/978-3-319-42928-1).



# IGS Central Bureau Annual Report 2025

Camille Martire<sup>1</sup>, David Maggert<sup>2</sup>,  
Robert Khachikyan<sup>3</sup>, Mara Anabel Figueroa Berroca<sup>4</sup>

- <sup>1</sup> International GNSS Service Central Bureau Acting Director, Central Bureau Deputy Director, and Governing Board Executive Secretary; NASA Jet Propulsion Laboratory, California Institute of Technology (Pasadena, California, USA)
- <sup>2</sup> International GNSS Service Central Bureau Network Coordinator; EarthScope Consortium (Washington, DC, USA)
- <sup>3</sup> International GNSS Service Central Bureau CBIS Engineer; RTX (Pasadena, CA, USA)
- <sup>4</sup> International GNSS Service Central Bureau Staff; NASA Jet Propulsion Laboratory, California Institute of Technology (Pasadena, CA, USA)

## 1 Introduction

In order to sustain the multifaceted efforts of the IGS, the Central Bureau (CB) works to support and realise the IGS strategic goals: achieving multi-GNSS technical excellence, strengthening public outreach and engagement, and building sustainability and resilience. The CB work program is shaped by the directives and decisions of the IGS Governing Board (GB) and IGS Executive Committee (EC), which often tasks members of the CB with representing the outward face of IGS to a diverse global user community and the general public.

The CB is funded by the United States National Aeronautics and Space Administration (NASA) and hosted at the Jet Propulsion Laboratory (JPL) in Pasadena, California, USA. This office was led by the CB Director Allison Craddock (NASA JPL, USA) with support from Deputy Director Camille Martire (NASA JPL, USA) until August 2025, and by CB Acting Director Camille Martire (NASA JPL, USA) after that point. The CB also works as the command-and-control centre for tracking network operations, mostly overseen by the Network Coordinator, David Maggert (EarthScope Consortium, USA). Additionally, the CB manages the primary IGS Information System (CBIS), the principal information

**Table 1:** IGS Central Bureau staff and responsibilities. NASA is the National Aeronautics and Space Administration. JPL is the Jet Propulsion Laboratory (Pasadena, USA). JPL is managed by the California Institute of Technology (Caltech) for NASA.

Name	Affiliation	Role
Allison Craddock	NASA JPL	Director (Jan - Aug 2025)
Camille Martire	NASA JPL	Deputy Director (Jan - Dec 2025) Acting Director (Sep - Dec 2025) GB Executive Secretary (Jan - Dec 2025)
David Maggert	EarthScope Consortium	Network Coordinator
Mara Anabel Figueroa Berroca	NASA JPL	CB Staff
David Stowers	NASA JPL	CB Staff
Robert Khachikyan	RTX	CBIS Manager
Brian Kohan	RTX	CBIS Engineer

portal where the IGS web, data, and mail services are hosted; these tasks are led by Robert Khachikyan (RTX, USA). A list of the CB members along with their respective roles and responsibilities is given in Table 1; the full-time equivalent effort of CB staff is approximately 2.5 FTE.

## 2 Summary of Accomplishments

This Section highlights the progress made by the IGS CB in 2025. In general terms, the CB continues to strive for maximum efficiency in holding IGS activities and leading administrative operations, and continues to pay particular attention to equitably represent different regions of the world by adjusting the meeting times to various time zones and technology bandwidths. Aside from these important considerations, the CB has also achieved the following items:

1. Supported the timely delivery and dissemination of IGS Data and Products.
2. Maintained the [public IGS GitHub Repository](#), in particular with respect to the GitHub Integration of IGS Documents and Files (see below) and issues submitted by users.
3. Supported the dissemination of IGS Guidelines, Formats, and Standards; namely including the [IGS CORS Guidelines](#) and their translations in various languages ([Arabic](#), [Chinese](#), [French](#), [German](#), [Hindi](#), [Portuguese](#), [Spanish](#)), the [ANTEX 2.0 format](#), the [Procedure for Becoming an IGS Station](#), the [IGS Guidelines for Long Product Filenames](#), and the [Guidelines and Code of Conduct for IGS Events](#).
4. Successfully organised 4 Governing Board Meetings, 8 Executive Committee meet-

ings, and 1 Associate Member Meeting (see below).

5. Coordinated, supported, and participated in the Standing Elections Committee (SEC) on the 2025 GB elections.
6. Provided administrative support to several IGS Components on an as-needed basis, including for instance meeting scheduling, voting form coordination, document hosting and publishing, etc..
7. Represented the IGS and its community interests at various stakeholder levels, including but not limited to: the United Nations Office for Outer Space Affairs' International Committee on GNSS (ICG), the Subcommittee on Geodesy of the United Nations Committee of Experts on Global Geospatial Information Management (UN GGIM), the World Data System (WDS), the International Association of Geodesy (IAG) Inter-Commission Committee on Climate, and the IAG Global Geodetic Observing System (GGOS).

### **3 Coordination of Meetings in 2025**

The CB coordinated the necessary logistics and administrative organisation for four (4) Governing Board (GB) meetings (3 virtual and 1 hybrid), eight (8) Executive Committee (EC) virtual meetings, and one (1) Associate Member virtual meeting. A detailed list of these activities can be found in Table 2. In addition, the CB coordinated Standing Elections Committee meetings for the 2025 GB Elections.

**Table 2:** 2025 meetings led and/or coordinated by the Central Bureau. While topics of the various GB meetings are reported here, official GB decisions are reported in the GB Executive Report.

---

## GB Meetings

### **GB69, virtual, 29 January 2025**

This was a special session dedicated to the topic of DOIs. An announcement from the ACC consortium; ESA’s proposal for minting DOIs; a presentation of the GGOS DOI WG Recommendations; a discussion about the way forward ; the US presidential order on DEIA.

### **GB70, virtual, 13 May 2025**

An update from the 2026 IGS Symposium and Workshop Local Organising Committee; the merging of the Bias & Calibration Committee with the PPP-AR Pilot Project; updates from the IGS and GGOS DOI Working Groups; the revival of the Tide Gauge Pilot Project; updates from the Infrastructure Committee; updates from the ACC consortium; updates from the Wuhan Combination Centre Pilot Project; the ICG Statement on the Global Geodesy Supply Chain.

### **GB71, hybrid, 30 August 2025**

A comprehensive review of the pending Governing Board Action Items; a proposal from Japan to host the 2028 IGS Symposium and Workshop; updates from the ACC consortium; updates from the Wuhan Combination Centre Pilot Project; updates from the IDEA Working Group; updates from the RINEX Committee; a discussion on IGS’ involvement in LEO-PNT; a discussion on the support of GNSS signal-in-space data; an update on the status of the Central Bureau leadership; a status update on the Status of the Bias & Calibration + PPP-AR Merged Committee; a discussion on DOIs and the commercial use of IGS Products; a discussion on a template “Letter of Intent for Collaboration and GNSS Data Sharing with the IGS”; the Antenna Ring Calibration Campaign results; an update from the 2026 IGS Symposium and Workshop Local Organising Committee; the ICG Statement on the Global Geodesy Supply Chain; various Central Bureau updates.

### **GB72, virtual, 04 December 2025**

A statement from NASA on NASA’s Space Geodesy Program’s support to IGS; updates from the ACC consortium; discussion, hosted by the RINEX Committee, on the creation of a “Signal-In-Space Format Standardization” Component; the outcomes of the LEO-PNT Survey and discussion about the creation of a LEO-PNT Pilot Project; the recommendations made by IGS/WG-D at ICG-19, including the Statement on the Critical Role of the Global Geodesy Supply Chain for GNSS.

**Table 2:** 2025 meetings led and/or coordinated by the Central Bureau (cont.).

---

**Associate Member Meeting**

**OpenAM 2025, virtual, 03 December 2025**

Updates from IGS Components (Committees, Pilot Projects, and Working Groups). Updates from the new ACC (NASA/GA/GFZ/MIT) and from the newly-introduced Wuhan Combination Centre (WCC).

---

**Executive Committee Meetings (virtual)**

**30 January 2025**

confidential

**25 March 2025**

confidential

**22 April 2025**

confidential

**03 June 2025**

confidential

**12 August 2025**

confidential

**29 September 2025**

confidential

**30 October 2025**

confidential

**17 December 2025**

confidential

---

## 4 Preparations for the 2026 IGS Symposium and Workshop

Ensuring successful events, symposiums, and workshops directly contributes to the goals and objectives of the IGS 2021+ Strategic Plan, providing facilitation, coordination, incubation, and advocacy for multi-GNSS technical excellence, community engagement, and organisational resilience. The 2026 IGS Symposium and Workshop will take place from the 1<sup>st</sup> to the 5<sup>th</sup> of June 2026, hosted by the University of Santiago de Chile (USACH) in collaboration with the Military Geographic Institute (IGM) of Chile. The program is once again structured in two parts: 3.5 days of symposium-style presentations, including keynotes and poster sessions, followed by 1.5 days of in-depth splinter sessions closely weaving collaborations between IGS Components.

Working closely with the Local Organising Committee (LOC) and Scientific Organising Committee (SOC), the CB provided executive oversight for the planning and organisation of the event. In particular, the CB ensured tight feedback loops between the SOC and Session Chairs to efficiently develop the event's programme, drafted the detailed agenda for publication, and regularly reported overall progress to the Governing Board.

The LOC contracted a private company (e-congress) to manage the event website, registration, and abstract submission system, as well as to support social media and outreach activities. Throughout these first few months of coordination, the Central Bureau has ensured close coordination with e-congress to ensure timely and effective communication with presenters and participants. The LOC successfully secured sponsorship from Trimble, GEOCOM, ESRI Chile, AMPERE, Leica Geosystems, and Köllner Labraña, reflecting the fact that industry partners strongly support the IGS.

The event and its program have attracted high interest from across the globe, with broad international participation in terms of both abstract submissions and registrations. Keynote speakers will include leading figures and high-level stakeholders in the local geodetic and GNSS community. The CB extends its sincere appreciation to the LOC and SOC for their extensive efforts to ensure the success of this event, and we look forward to continuing to support its planning, organisation, and execution.

## 5 Central Bureau Information Systems (CBIS)

The CB continuously works toward maintaining and improving a number of critical public-facing web applications. The most important of them are the IGS Website, the IGS Site Log Manager (SLM), the IGS Network Map, the IGS Associate Member (AM) Database, and the critically-important IGS Mailing Lists.

## 5.1 IGS Website

The IGS Website (<https://igs.org>), meticulously curated by the CBIS team, stands as the prominent public interface of Service, and must therefore embody a commitment to excellence. As of today, it prioritises user satisfaction, accessibility, and effectiveness; namely through an intuitive and secure navigation structure adhering to web accessibility standards. Regular content updates, covering news, events, and institutional changes, reflect a dedication to keeping our users informed. A cohesive brand identity and interactive features (including feedback mechanisms and multimedia content) ensure consistent user engagement and create a dynamic online environment with which they can interact.

Practically speaking, the IGS Website is key for the CB to support all IGS events, and especially the virtual ones. Besides featuring the advertisement of events and registration information, the website also serves as an online catalogue of recorded presentations and other resources to the community after an event has been completed. It features the latest IGS workshops (<https://igs.org/workshops>), the Tour de l'IGS series (<https://igs.org/tour-de-ligs/>), important formats and standards (<https://igs.org/formats-and-standards>), reference documents (<https://igs.org/documents/>), and a variety of news relevant to the community (<https://igs.org/news/>, <https://igs.org/tech-report/>). This effort consolidated all current information in a more visible and easily accessible part of the CBIS.

In 2025, <https://files.igs.org> has served approximately 660 K users with approximately 8 TB of data; roughly 480 K users were new users not previously known to our domain. <https://slm.igs.org> registered roughly 12 K visits by transferring about 20 GB of data. <https://network.igs.org> served approximately 162.5 K users serving approximately 610 GB of data. <https://igs.org> served approximately 925 K visitors with roughly 4 + TB of data.

## 5.2 IGS Site Log Manager and Network Map

Both the IGS Mission statement and [IGS 2021+ Strategic Plan](#) goals underline the importance of open access to data and products, which facilitates collaborations, standardisation, and inclusivity. Open access data enables scientists to visualise the geospatial coverage of the IGS Network, investigate the type of GNSS data from stations, view real time capabilities, and know the various data centres for sourcing GNSS data (CDDIS, etc.).

The IGS Site Log Manager (SLM, <https://slm.igs.org>) is a web-based online application designed for the purpose of managing the metadata of IGS GNSS ground-based sites. The accompanying IGS Network Map (<https://network.igs.org>) serves as the public interface for any user from all over the world to view station metadata from the IGS SLM through a comprehensive station list and interactive station map. The SLM and Network

Map maximise the reliability, accuracy, and searchability of the IGS site logs.

### 5.3 Network Coordination

The CB Network Coordinator - with the help of the Infrastructure Committee - coordinates the monitoring of station logs and RINEX metadata, and evaluates all new IGS station proposals on a regular basis. Additionally, the CB Network Coordinator also collaborates with the Antenna Committee Chair and GNSS manufacturers to have their equipment added to the official IGS files (`rcvr_ant.tab` and `antenna.gra`). For the latest update on those fronts, see the Governing Board Executive Report. Finally, the CB Network Coordinator also ensured timely responses to all email inquiries received from users about data, products, or general IGS information.

### 5.4 GitHub Integration of IGS Documents and Files

In 2025, the CB endeavoured to start migrating IGS operational files, standards, and some documentation from the current static, webserver-based repository to a version-controlled, centralised public repository on the [IGS GitHub Account](#). Once this migration becomes operational, the repository will be called “IGS\_Operational\_Files”, and an announcement to the community will be made. The objective of this effort is to create a centralised, sustainable, and future-proof “one-stop shop” for users. Furthermore, version-control ensures that the history of those files is preserved with minimal storage cost. Since the IGS’ operational files are machine-readable, often ASCII files, it is trivial to move them to such a repository and start keeping track of changes. This migration will preserve static URLs pointing to the latest file’s version, while also enabling permanent access to historical versions.

This effort is being carried out gradually, in close coordination with file owners, with an expected final transition period of at least one year to ensure transparency and avoid disruption to the community. In 2025, some key files were copied to the IGS\_Operational\_Files GitHub repository, and file owners made sure their updates were carried out both on the original webserver and on GitHub. For instance, one can consider `igs20.atx`, `igs_satellite_metadata.snx`, `rcvr_ant.json` / `rcvr_ant.tab`. Committees and file maintainers were encouraged to contact the CB if they wish to migrate additional files or documentation to GitHub and receive editing permissions.

## 6 Communication Efforts

The CB strives to comprehensively address the broad variety of applications supported by the IGS, to foster community engagement, to disseminate IGS updates efficiently,

and to contribute appropriately to global initiatives. This commitment is exemplified through the implementation and sustained management of a multifaceted communication strategy, encompassing academic interactions, community outreach, social media presence, and collaborations with influential entities.

The Tour de l'IGS virtual mini-workshop series makes up the academic side of IGS communications, allowing relevant interactions with / outreach to the community. Facing staffing constraints and multiple transitions, the CB only organised one Tour de l'IGS “stop” in 2025, focusing on the African continent (<https://igs.org/tour-de-ligs/#7th-stop-agenda>). Hosted by Fernand Balé (Bureau National d'Etudes Techniques et de Développement, Côte d'Ivoire) and Babatunde Rabiou (National Space Research and Development Agency, Nigeria) with support from the IGS Central Bureau, this event featured research and operational GNSS projects executed by African institutions and scientists and/or using African data, discussed continental-scale reference frames, and opened with a discussion to gather community input. This event kick-started the CB's efforts to build a more active communication strategy with this region, currently underrepresented in the IGS Network and Community.

Furthermore, the CB sustains its engagement and collaborations with the geodetic community at large through a strong presence on social media, namely [LinkedIn](#) and [YouTube](#). In terms of pure statistics, the IGS Social Media accounts grew as follows (as of 15 January 2025):

**LinkedIn** (<https://www.linkedin.com/company/igsorg/>):

- 3029 followers (+344 since last report, +29/month)

**YouTube** (<https://www.youtube.com/igsorg>):

- 647 subscribers (+101 since last report, +8/month)
- 28157 (+4252 since last report, +354/month)
  - 1800 views were obtained through the recordings of presentations given during the [2024 30<sup>th</sup>-Anniversary IGS Workshop](#) (4500 total since publication).
  - 620 views were obtained through the recordings of presentations given during the [2025 7<sup>th</sup> Tour de l'IGS Stop \(“Spotlight on Africa”\)](#).

Finally, the CB actively participates in international technical forums to support existing efforts and develop new opportunities supporting the global geodesy. This includes, namely, coordinating with United Nations (UN) components, such as the UN International Committee on GNSS (ICG), UN Global Geospatial Information Management Subcommittee on Geodesy, and the newly-established UN Global Geodetic Center of Excellence. For more details, see **the “External Engagement” Section** in the GB chapter.

## **7 Future Steps for 2026**

Moving forward, the IGS CB will continue working towards achieving substantial milestones towards sustainability and resilience for the IGS. As detailed in the GB Executive Report, the licensing and citation of IGS data has risen as a very important topic for the sustainability of the Service; the CB will help coordinate efforts to define IGS-wide policies in collaboration with the Data Licensing and DOI Working Groups, which were created in early 2025. The CB will also ensure that IGS Components operate in the most optimal fashion possible, and in particular work with Component Chairs and the Standing Elections Committee to identify missing Vice-Chairs. Another crucial endeavour involves finalising the preparation and successfully executing the 2026 IGS Symposium and Workshop, thereby fostering collaboration and geodetic knowledge exchange within the IGS Community. Moreover, the IGS CB will restart its efforts aiming at enhancing engagement in Africa, with one particular goal being the improvement of the GNSS infrastructure in this region through capacity development initiatives. Finally, the CB will continue to fulfil all of its regular administrative tasks and duties, including event coordination, governance support, network coordination, and communications.

## **8 Acknowledgements**

The Central Bureau gratefully acknowledges the contributions of our colleagues at the Astronomical Institute at the University of Bern, who edit, assemble, and publish the IGS Annual Technical Report as a service to the Central Bureau and IGS community. The Central Bureau also wishes to thank all Governing Board members who actively participated in committees, review panels, and other efforts that have contributed to the improvement and sustainability of this organisation and its administration.

Part II  
Analysis Centers



# Analysis Center Coordinator Technical Report 2025

S. Masoumi<sup>1</sup>, T. Herring<sup>2</sup> T. Yates<sup>3</sup>

- <sup>1</sup> Geoscience Australia, Canberra, ACT, Australia  
E-mail: [acc@igs.org](mailto:acc@igs.org), [Salim.Masoumi@ga.gov.au](mailto:Salim.Masoumi@ga.gov.au)
- <sup>2</sup> Massachusetts Institute of Technology, Cambridge, MA, USA
- <sup>3</sup> Science Systems and Applications Inc., Lanham, MD, USA

## 1 Introduction

The IGS Analysis Center Coordinator (ACC) is responsible for monitoring the quality of products submitted by individual analysis centers and combining them to produce the official IGS products. The IGS ACC also has the overall responsibility for coordinating the changes, developments and improvements within the contributing analysis centers to produce the IGS products using the latest models and standards. The IGS products continue to perform at a consistent level, and in general the solutions submitted by the analysis centers maintain a consistent level of performance. The combined IGS products by the ACC maintain the expected qualities and are the most consistent compared to any individual ACs. The different analysis centers contributing to the IGS operational products, are listed in Table 1. Table 1 also shows the abbreviations used across this report for the IGS products.

In 2025, a primary focus of the IGS Analysis Center Coordinators was the transitioning of the primary ACC operations from Geoscience Australia to NASA and multi-GNSS development (see Section 2). In addition to maintaining the quality of the IGS GPS-only products (Section 3), the ACC continued to provide demonstration multi-GNSS combined products and continued the contributions towards fully multi-GNSS combinations (Section 4).

**Table 1:** The abbreviations used by the IGS ACC in this report for different analysis centers and IGS products.

Analysis center/IGS product	Description code
Center for Orbit Determination in Europe (CODE)	COD
Natural Resources Canada (NRCan)	EMR
European Space Agency (ESA)	ESA
GeoForschungsZentrum Potsdam (GFZ)	GFZ
Centre National d'Etudes Spatiales (CNES/CLS)	GRG
Geospatial Information Authority of Japan (GSI) and the Japan Aerospace Exploration Agency (JAXA)	JGX
Jet Propulsion Laboratory (JPL)	JPL
Massachusetts Institute of Technology (MIT)	MIT
NOAA/National Geodetic Survey (NGS)	NGS
Scripps Institution of Oceanography (SIO)	SIO
The United States Naval Observatory (USNO)	USN
Wuhan University	WHU
IGS ultra-rapid adjusted part	IGA
IGS ultra-rapid predicted part	IGU
IGS ultra-rapid experimental GLONASS	IGV
IGS real-time	IGC
IGS rapid	IGR
IGS final	IGS

## 2 Transition of primary operations and multi-GNSS development

During 2025, the work was progressed to transition the primary ACC operations from Geoscience Australia to NASA. On-site training and discussion between NASA, MIT and GA staff occurred in early 2025 at the GA office, and further online training and hand-over occurred during the year. There was a delay in handover of the operations compared to the initial planning of late 2025; however, the work is underway and the transition is expected to occur by July 2026.

A revised roadmap for the ACC transition, including transition to fully multi-GNSS combinations is shown in Figure 1. Testing of multi-GNSS combination software was progressed in 2025, in particular additional testing of clock and bias combinations. This was accompanied by the efforts of the IGS multi-GNSS task force, which provided options to the ACC to use for multi-GNSS product combinations. More details on the multi-GNSS combination efforts and prospects at the ACC are described in Section 4.

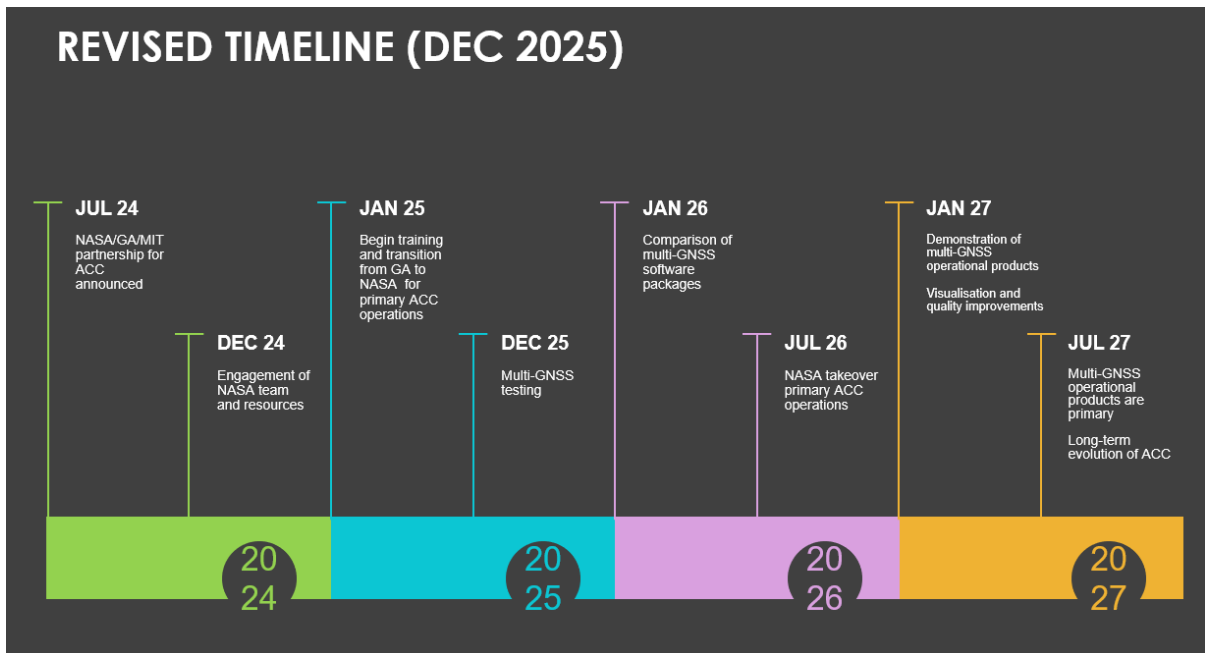


Figure 1: ACC revised transition roadmap as of December 2025.

### 3 Product Quality and Reliability

In 2025, the delivery of the ultra-rapid, rapid and final products was well within the expected latencies for most of the year (e.g. about 98.4% of the deliveries within the expected latency of 17-41 hours for the rapid products and about 99.9% within the expected latency of real time to 9 hours for the ultra-rapid products). In total, there were six instances of delayed rapid products (of up to 3-5 hours) and only one case of delayed ultra-rapid products (of 2 hours). Two of the delayed products were found to be due to an overflow of CPU or memory usage. There was also one case due to storage disk issue. Two cases of delays were due to issues reading and converting satellite broadcast navigation files, and one case was due to an error in one of the ACC scripts. Quality of the products and consistency of analysis center solutions remained as expected.


#### 3.1 Ultra-rapid

The ultra-rapid is one of the most widely utilized IGS products, often used for real-time and near-real-time applications. In 2025, IGS received submissions from nine different ACs which were combined to produce IGS ultra-rapid products (see Table 2 for a list of ACs that are currently included in the combined solutions). JGX started providing ultra-rapid products since November 2024 (GPS week 2340), which are included in the combination without weights.

**Table 2:** ACs contributing to the IGS ultra-rapid products; *W* signifies a weighted contribution, *C* is comparison only. The WHU ERP solutions are by default weighted, with the exception of the length of day estimates which are excluded from the combination for WHU.


Analysis center	Orbit	ERP	Clock
COD	W	W	C
EMR	W	W	W
ESA	W	W	W
GFZ	W	W	C
GRG	C	C	C
JGX	C	C	C
SIO	C	C	-
USN	C	C	W
WHU	W	W (LoD C)	C

The combined IGS ultra-rapid orbit can be split into two components, a fitted portion based on observations, and a predicted component reliant upon forward modeling of the satellite dynamics. The fitted portion of the ultra-rapid orbits continues to agree to the rapid orbits with a median value of 6 mm (see Figure 2) and has been consistently at this level since GPS week 1500.

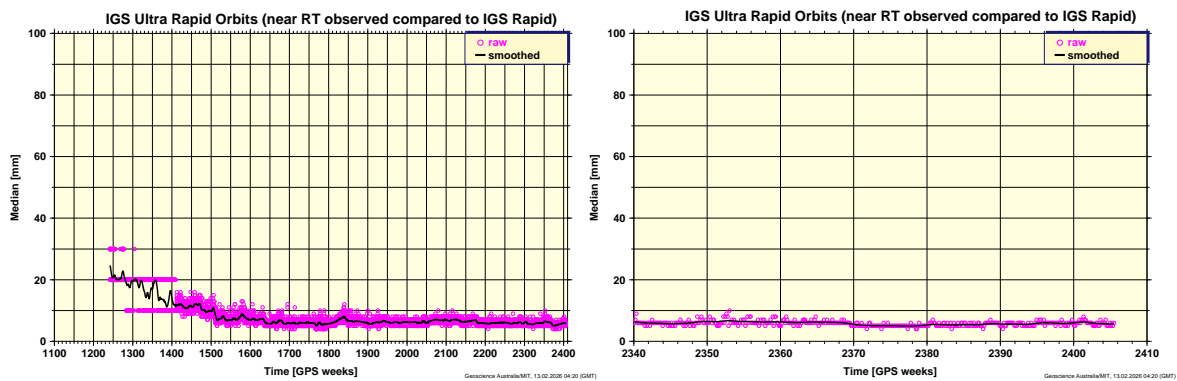


**Figure 2:** The median difference of the fitted component of the IGS ultra-rapid (IGU) combined orbits with respect to the IGS rapid (IGR) orbits. The historical time series of comparison results is shown on the left, and recent comparison results are shown on the right.

In addition, over the past year there was little change in the agreement between the ultra-rapid predicted orbits compared to the IGS rapid orbits (see Figure 3) hovering around a median value of 32 mm.

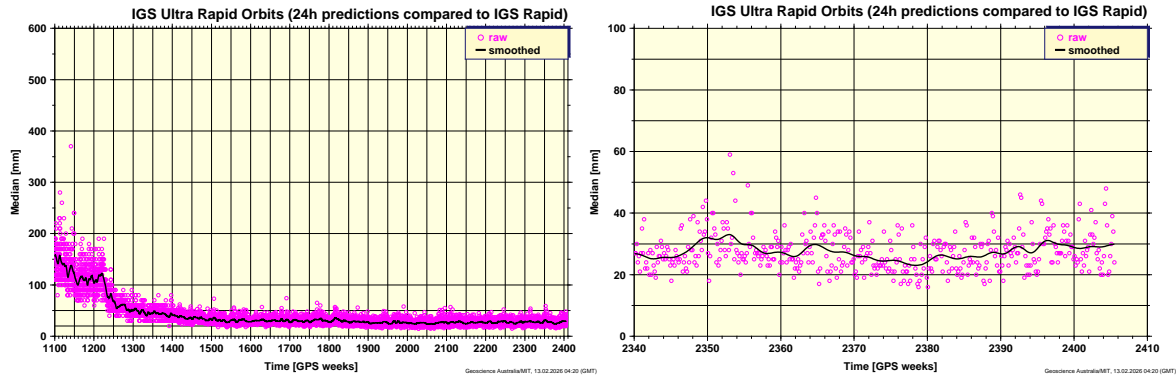

**Figure 3:** Median of IGU combined predicted orbits compared to IGR. The historical time series of comparison results is shown on the left, and recent comparison results are shown on the right. Note the change in scale of the Y axis.

The weighted RMS error of the individual orbit submissions from the analysis centers with respect to the combined ultra-rapid products are plotted in Figure 4. GRG ultra-rapid orbits, currently unweighted, continued to compare well overall to the combined orbits after implementing increased duration of dynamic parameter estimation from 24 hours to 48 hours by the GRG team (Mezerette et al., 2024). The ACC is still considering weighting the GRG ultra-rapid orbits to include one more AC contribution subject to improvement in modeling of eclipsing satellites.

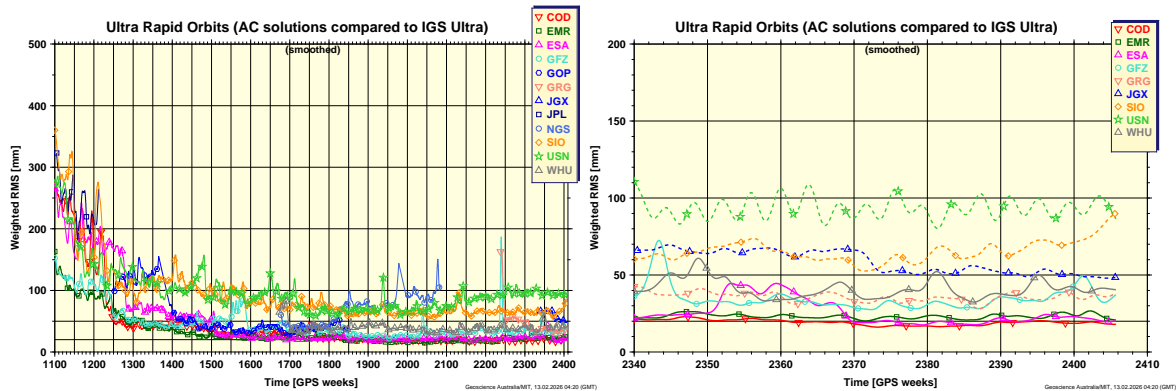

**Figure 4:** Weighted RMS of AC ultra-rapid orbit submissions (smoothed). The historical time series of comparison results is shown on the left, and recent comparison results are shown on the right. The dashed lines on the figure on the right are the solutions that are unweighted as of February 2026, while the solid lines are the weighted solutions. Note the change in scale of the Y axis.


**Table 3:** ACs contributing to the IGS rapid products; *W* signifies a weighted contribution, *C* is comparison only.

Analysis center	Orbit	ERP	Clock
COD	W	W	W
EMR	W	W	W
ESA	W	W	W
GFZ	W	W	W
GRG	W	W	W
JGX	W	W	W
JPL	W	W	W
NGS	W	W	C
SIO	C	C	-
USN	C	C	C
WHU	W	W	W


### 3.2 Rapid

In total, eleven individual analysis centers contributed to the IGS rapid products in 2025 (see Table 3).

The rapid orbit products from the different analysis centers weighted in the combination remained at a consistent level of below 15 mm (Figure 5), and the difference between the combined IGS rapid orbits and the combined IGS final orbits was consistently below 5 mm (see Figure 7). In addition, the standard deviation of the rapid satellite and station clock solutions was always below 25 picoseconds (ps) for the weighted centers (Figure 6).

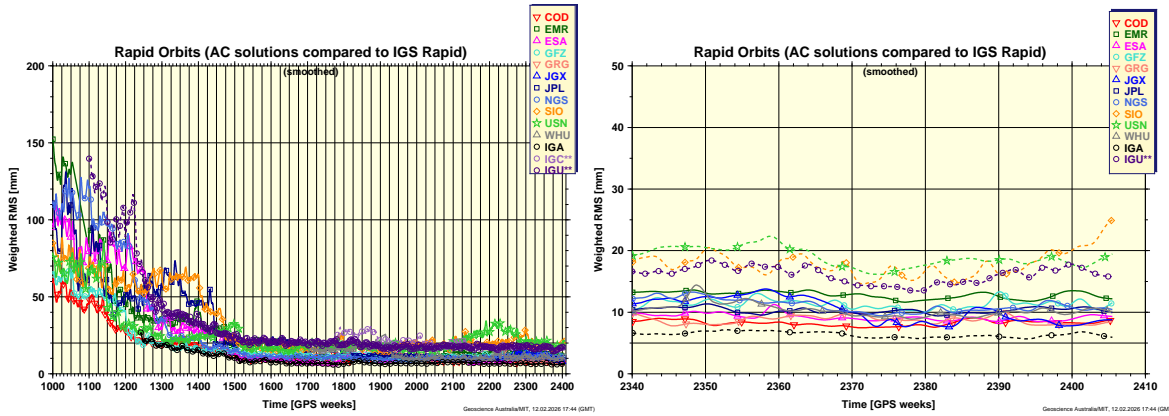

**Figure 5:** Weighted RMS of ACs rapid orbit submissions (smoothed). The historical time series of comparison results is shown on the left, and recent comparison results are shown on the right. IGC\*\* are 24-hour products each containing four 6-hour segments from each update interval of the IGS real-time stream. IGU\*\* consists of four separate comparisons to IGR done each day over the first 6 hours of each IGS ultra-rapid product. The dashed lines on the figure on the right are the solutions that are unweighted as of February 2026, while the solid lines are the weighted solutions. Note the change in scale of the Y axis.

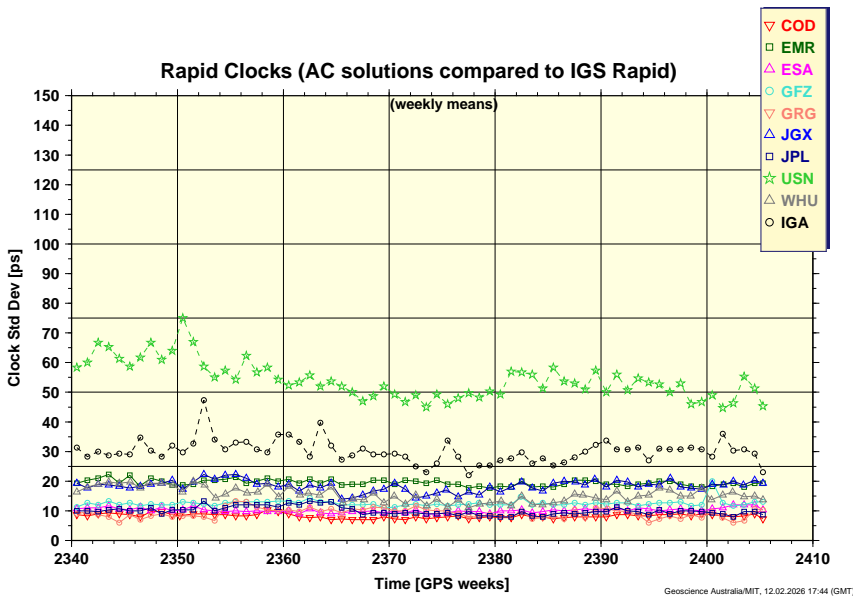

**Figure 6:** Standard deviation of ACs rapid clock submissions (smoothed). IGC\*\* are 24-hour products each containing four 6-hour segments from each update interval of the IGS real-time stream. IGU\*\* consists of four separate comparisons to IGR done each day over the first 6 hours of each IGS ultra-rapid product. The dashed lines are the solutions that are unweighted as of February 2026, while the solid lines are the weighted solutions.

### 3.3 Final


In total, there are ten individual ACs contributing to the IGS final products (see Table 4). EMR clocks started to be weighted in the combinations since the products of 04 May 2025 (GPS week 2365) after NRCan improved their clock solutions by including GPS phase biases and using the same software as in the repro3 campaign for their operational products. The significant drop in the standard deviation of the EMR clocks since GPS week 2365 is observed in Figure 8.

**Table 4:** ACs contributing to the IGS final products; W signifies a weighted contribution, C is comparison only. EMR clocks started to be weighted in the combinations since the products of 04 May 2025 (GPS week 2365).


Analysis center	Orbit	ERP	Clock
COD	W	W	W
EMR*	W	W	W
ESA	W	W	W
GFZ	W	W	W
GRG	W	W	W
JGX	W	W	C
JPL	W	W	W
MIT	W	W	C
NGS	W	W	C
SIO	W	C	-

The AC final orbit solutions that are weighted in the IGS combinations are comparable at around the 10 mm RMS level (see Figure 7). The standard deviations of the final clock solutions for the weighted centers were below 15 ps level for all of the weighted centers (Figure 8).


To assess the quality of the combined products, PPP solutions estimated using the orbit and clock products can be compared to the IGS daily SINEX solutions as a measure of how well the products provide access to the IGS reference frame. Figure 9 shows the station residual RMS of the PPP solutions using the IGS combined rapid and final products as well the PPP solutions using products of each of the contributing analysis centers. Table 5 lists the median RMS values for the past year. The IGS combined products are always one of the best solutions, and the IGS combined final products provide the best median consistency with the IGS SINEX solutions compared to every individual solution, making them the most suitable option to access the IGS reference frame, and consequently ITRF.

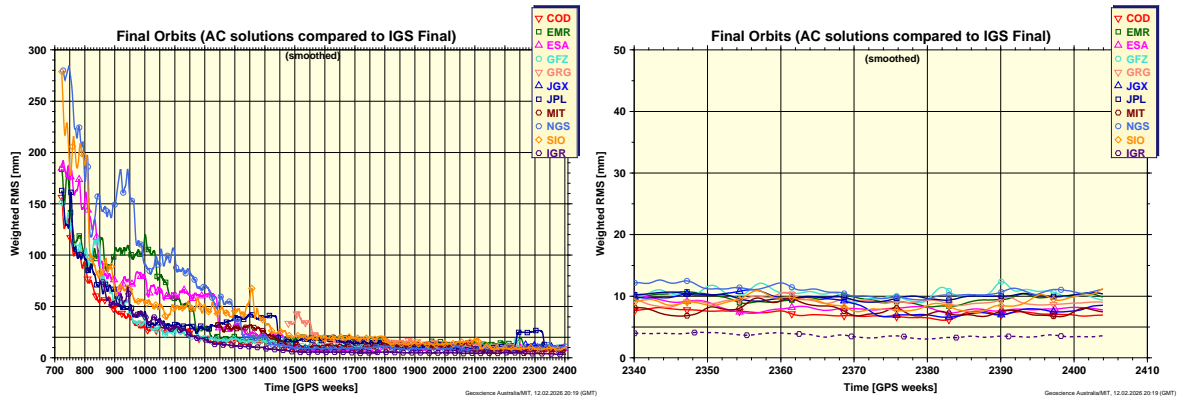

**Figure 7:** Weighted RMS of IGS final orbits (smoothed). The historical time series of comparison results is shown on the left, and recent comparison results are shown on the right. The dashed lines on the figure on the right are the IGS Rapid orbits that are plotted for comparison only. Note the change in scale of the Y axis.

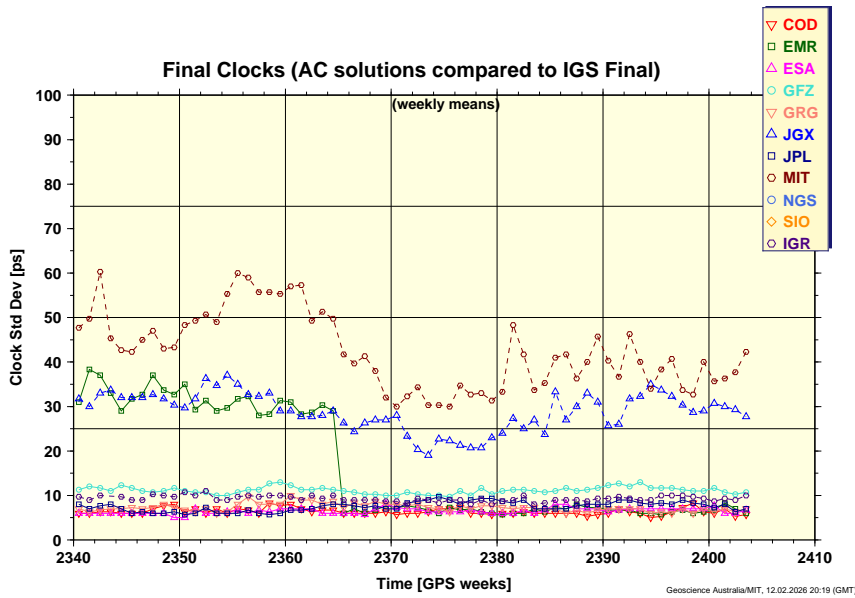

**Figure 8:** Standard deviation of IGS final clocks (smoothed). The dashed lines are the solutions that are unweighted as of February 2026, while the solid lines are the weighted solutions.

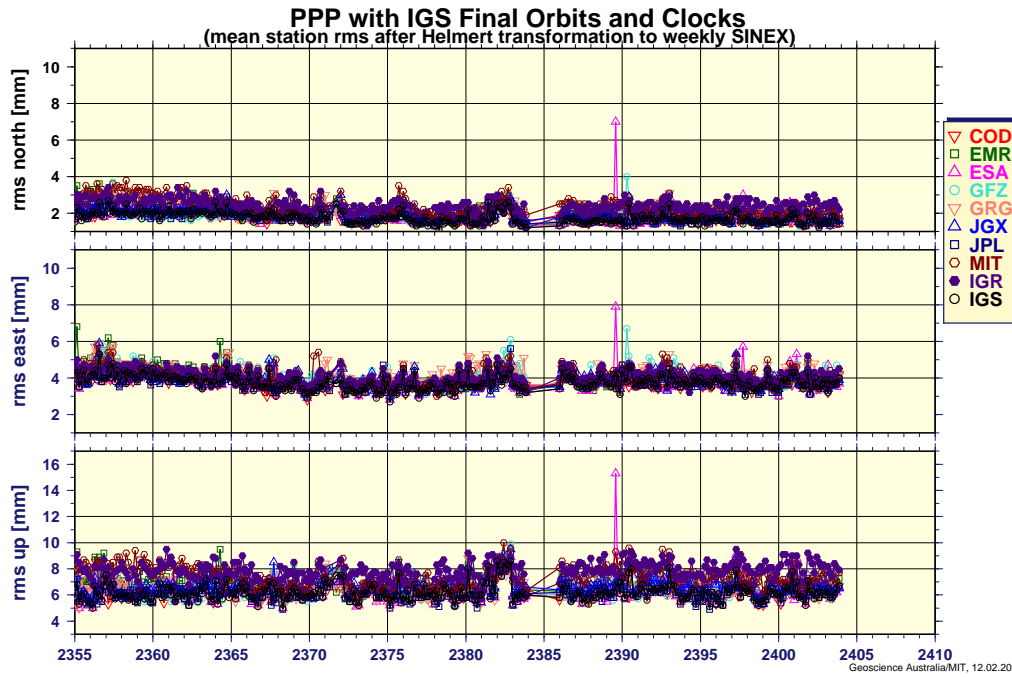

**Figure 9:** Station RMS residuals from the comparison of the PPP solutions using the final orbit and clock products of each of the analysis centers as well as IGS rapid and final products to the IGS weekly SINEX solution. All PPP solutions were estimated using the same network of IGB20 core sites and using Bernese v5.2 software.

**Table 5:** Median station coordinate residuals from comparison of PPP solutions using different sets of orbits and clocks compared with the IGS weekly SINEX solutions in 2025.

Products used in the PPP solution	North RMS [mm]	East RMS [mm]	Up RMS [mm]
COD	1.8	3.8	6.2
EMR	2.0	4.0	6.6
ESA	1.8	3.8	6.1
GFZ	1.9	4.0	6.3
GRG	2.0	4.0	6.3
JGX	1.9	3.9	6.5
JPL	1.8	3.8	6.1
MIT	2.4	4.1	7.5
IGR	2.4	4.0	7.8
IGS	1.7	3.7	6.0

## 4 Multi-GNSS combinations

As mentioned in Section 2, an important component of the ACC four-year roadmap has been the transition to multi-GNSS combined products. In 2025, the ACC started to test the different orbit and clock combination tools available for providing demonstration multi-GNSS combinations. These tools include GA’s Robust Orbit Combination Software (ROCS) (Geoscience Australia, 2024), NRCan’s clock and bias combination software (SPARKCombo) (Banville et al., 2020), and GFZ’s Software for Precise Orbit and Clock Combination (SPOCC) (Mansur et al., 2022, 2024). The ACC also used the Gravity Recovery Object Oriented Programming System (GROOPS) developed by Graz University of Technology (Mayer-Guerr et al., 2021) for generating reference attitudes for multi-GNSS combined orbits. The IGS ACC also participated in the multi-GNSS Task Force, who completed the assessment of different combination software available for the multi-GNSS combinations, and concluded its mission.


In early 2026, the ACC will provide multi-GNSS demonstration Final orbits, clocks and biases along with reference attitudes for the period from the end of the Repro3 campaign to the current date, and will continue to provide the demonstration Final multi-GNSS products going forward. Following that, the ACC will consider creating multi-GNSS Rapid products as well. Early results will be presented at the IGS Workshop in June 2026 in Chile.

In addition to the Final demonstration products, the IGS ACC continued the provision of multi-GNSS (GPS, Galileo and GLONASS) ultra-rapid orbits on an operational basis as demonstration products. These multi-GNSS ultra-rapid products are currently made available four times a day approximately 20 minutes after the legacy GPS-only ultra-rapid orbits are published. The demonstration multi-GNSS orbit combinations use the GA’s ROCS orbit combination software (Geoscience Australia, 2024).


Table 6 lists the Analysis Centers currently contributing to the multi-GNSS ultra-rapid orbit combinations. The consistencies of the individual AC orbits with the combined multi-GNSS orbits are displayed in Figure 10. Figure 11 shows the RMS of the AC ultra-rapid orbit solutions per GNSS satellite in 2025.

From Figures 10 and 11, the RMS levels of the different AC solutions for GPS orbits are mostly very similar to those observed for the legacy GPS-only solutions (Figure 4) at below 50 mm for the weighted AC orbits. The comparison with the IGS ultra-rapid GPS-only legacy combinations (Figure 10, dashed black lines) also shows that the multi-GNSS combinations are generally very close to the GPS-only combinations for the GPS constellation, with the RMS level between the two at a median of about 6 mm. The weighted AC contributions for Galileo are consistent with each other at levels below 60 mm, which is very close to the consistencies observed for GPS satellites.

The consistency of the AC orbits for the GLONASS satellites is in the range 50-80 mm for the weighted ACs (Figure 10). The multi-GNSS combined orbits are consistent with the

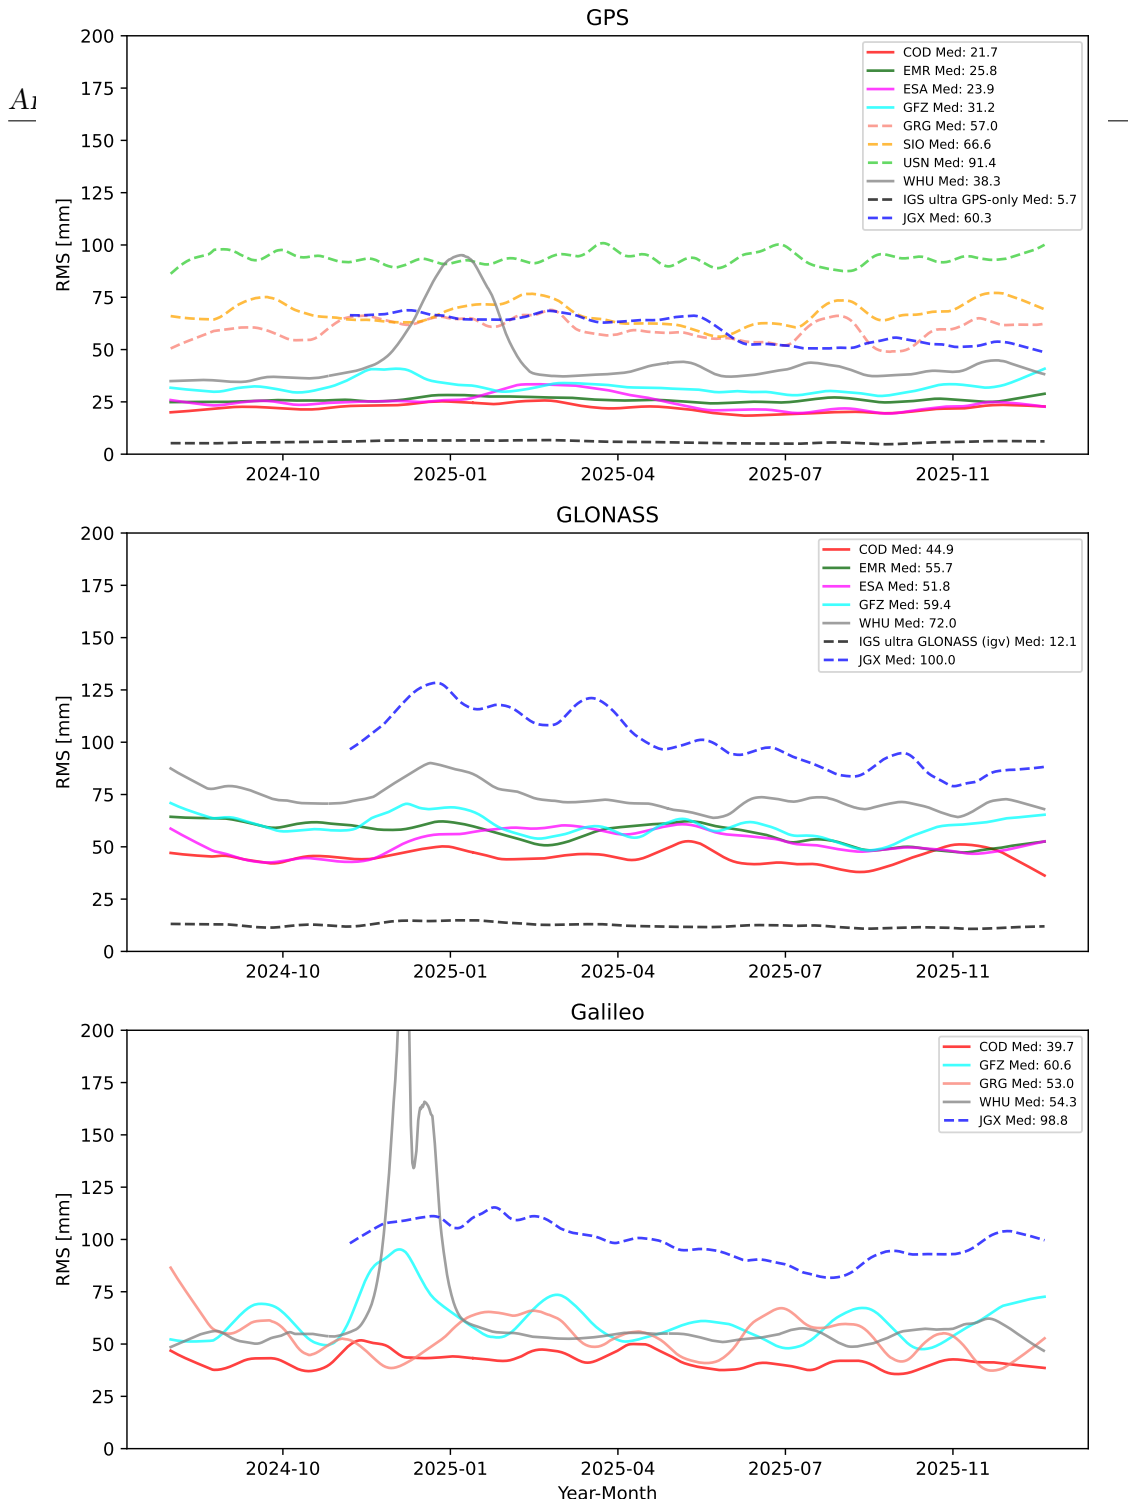

**Figure 10:** RMS of analysis center orbit solutions (smoothed) compared to the IGS combined orbits for the IGS multi-GNSS ultra-rapid demonstration products for GPS (top), GLONASS (middle) and GALILEO (bottom). The dashed lines are the AC solutions that are not weighted in the combinations, while the solid lines are the weighted ACs.

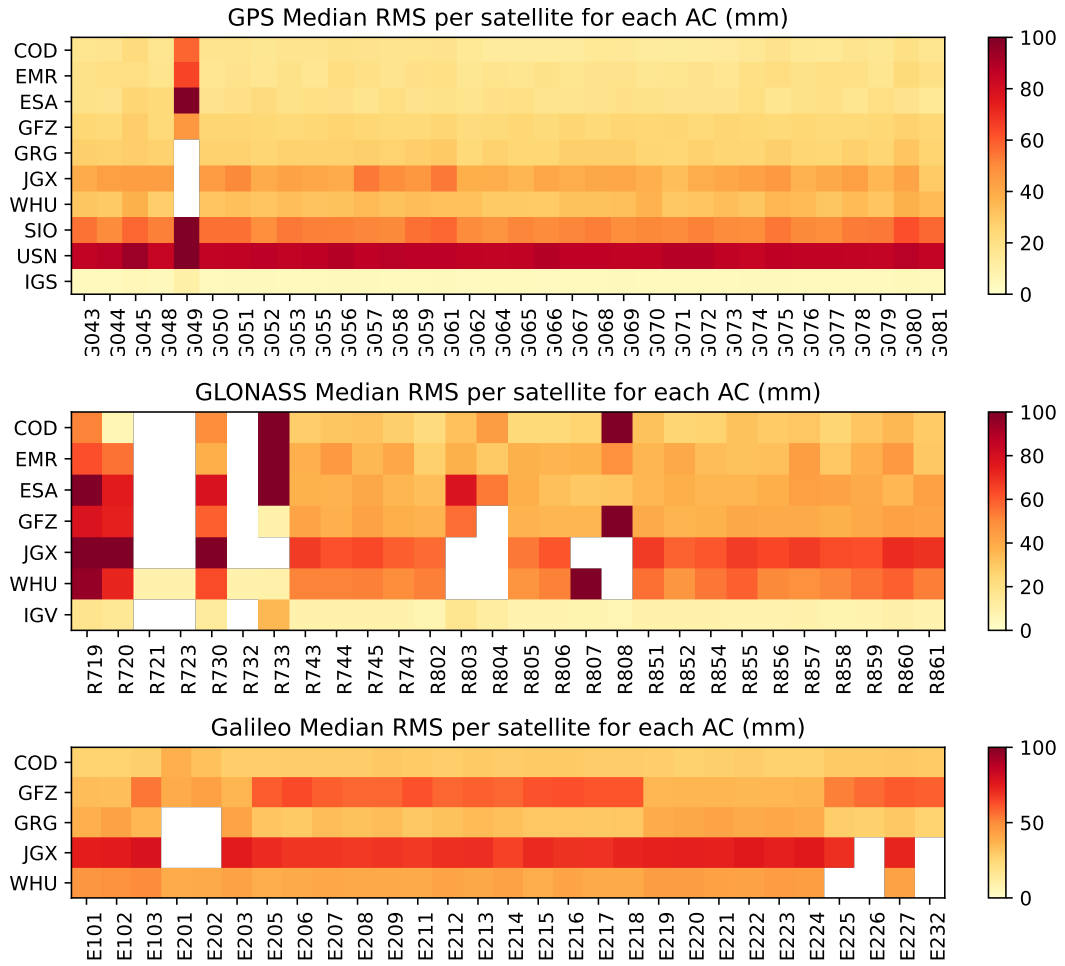

**Figure 11:** Median RMS of the individual satellites compared to the combined orbits for the multi-GNSS ultra-rapid solutions for GPS (top), GLONASS (middle), and Galileo (bottom) in 2025. IGS is the IGS ultra-rapid legacy GPS-only combined orbits, and IGV is the current experimental ultra-rapid GLONASS-only combined orbits.

**Table 6:** ACs contributing to the IGS demonstration multi-GNSS ultra-rapid orbits; W signifies a weighted contribution, C is comparison only.

Analysis center	GPS	GLONASS	Galileo
COD	W	W	W
EMR	W	W	-
ESA	W	W	-
GFZ	W	W	W
GRG	C	-	W
JGX	C	C	C
WHU	W	W	C
SIO	C	-	-
USN	C	-	-

experimental legacy GLONASS-only combinations at about 14 mm level. The disparities between the different AC orbit solutions are the largest for the older Block M satellites, in particular R719, R720, R730, R731 and R733, while they have improved for the more recently launched satellites, e.g. R802 from the Block K1B or more recent launches in Block M such as R851. (see Figure 11).

## 5 Future Work

In 2026, the IGS ACC will complete the handover of the primary operations from GA to NASA, in accordance with the revised transition roadmap as in Section 2. Moreover, the ACC will progress the provision of combined multi-GNSS products. Final and Rapid set of multi-GNSS demonstration products will be made available in 2026, and will replace the current GLONASS experimental products. This will eventually lead to replacing the GPS-only operational products following the roadmap of Figure 1.

## References

- Banville Simon, Jianghui Geng, Sylvain Loyer, Stefan Schaer, Tim Springer, and Sebastian Strasser. On the interoperability of IGS products for precise point positioning with ambiguity resolution. *Journal of geodesy*, 94(1):1–15, 2020.
- Geoscience Australia. Robust Orbit Combination Software (ROCS). <https://github.com/GeoscienceAustralia/ROCS>, 2024.
- Mansur, G, P Sakic, A Brack, B Männel, and H Schuh. Combination of GNSS orbits using least-squares variance component estimation. *Journal of Geodesy*, 96(11):92, 2022.
- Mansur, G, A Brack, P Sakic, B Männel and H Schuh. Utilizing least squares variance component estimation to combine multi-GNSS clock offsets. *GPS Solutions* 28(2):70, 2024.
- Mayer-Guerr, Torsten, Saniya Behzadpour, Annette Eicker, Matthias Ellmer, Beate Koch, Beate, Sandro Krauss, Christian Pock, Daniel Rieser, Sebastian Strasser, Barbara Suesser-Rechberger, Norbert Zehentner, and Andreas Kvas. GROOPS: A software toolkit for gravity field recovery and GNSS processing. *Computers & Geosciences*, page 104864, 2021. ISSN 0098-3004. doi:<https://doi.org/10.1016/j.cageo.2021.104864>.
- Mezerette A, S Loyer, E Saquet, and A Banos Garcia. CNES/CLS IGS Analysis Center: rapid & ultra-rapid products overview. In *IGS Symposium and Workshop 2024*, 2024.



# Wuhan Combination Center Technical Report 2025

Jianghui Geng<sup>1</sup>, Qiang Wen<sup>1</sup>, Yahao Zhang<sup>1</sup>, Bin Wang<sup>2</sup>

- <sup>1</sup> State Key Laboratory of Precision Geodesy,  
Chinese Academy of Sciences, Wuhan, China
- <sup>2</sup> Shanghai Astronomical Observatory,  
Chinese Academy of Sciences

## 1 Introduction

The Wuhan Combination Center (WCC) was formally approved by the Governing Board of the International GNSS Service on DThe Wuhan Combination Center (WCC) was formally approved by the IGS Governing Board (GB) as a Pilot Project (PP) in 2024. It aims at providing combined high-precision and highly-reliable multi-GNSS satellite orbits/clocks/biases and receiver clocks/biases. The priorities of the WCC include the development and exploitation of innovative combination efforts for orbits, clocks, and code/phase biases as an experimental alternative to the legacy combination procedure.

## 2 The one-year progress of WCC

The routine combination of both final and rapid products has been operational since GPS week 2357. The products are gathered and combined at a weekly basis. The combined products are released each Monday. The combined final products have two-week latency, while the combined rapid products have one-week latency.

The combination integrates contributions from multiple Analysis Centers (ACs) to generate robust and precise products. For the final product combination, the current input includes products from 11 ACs: COD, EMR, ESA, GFZ, GRG, HUS, JGX, JPL, MIT, NGS, and SIO. Among these, JGX is utilized primarily for comparison and validation purposes, while MIT, NGS, and SIO contribute exclusively to the orbit combination. While for rapid product combination, the inputs are also from 11 ACs: COD, EMR, ESA, GFZ, GRG, HUS, JGX, JPL, NGS, SIO, and WUM. Among these, JGX is utilized primarily

for comparison and validation purposes, while NGS, and SIO contribute exclusively to the orbit combination.

**Table 1:** List of analysis center data used in the routine combination of final products

Final								
Label	system	orbit	clock	attitude	code OSB	phase OSB	24:00 epochs	Note
CODOOPSFIN	GRE	300 s	30 s	30 s	1 d (GE)	1 d (GE)	CLK&SP3	
EMROOPSFIN	G	300 s	30 s	30 s	1 d (G)	1 d (G)		
ESAOOPSFIN	GRE	300 s	30 s				SP3	
GFZOOPSFIN	GRE	300 s	30 s					
GRGOOPSFIN	GRE	300 s	30 s	30 s	1 d (GE)	1 d (GE)	CLK&SP3	
HUSOMGXFIN	GRE	300 s	30 s	30 s	1 d (GRE)	1 d (GE)	CLK&SP3	
IGSOOPSFIN	G	900 s	30 s					Comp. only
JGXOOPSFIN	GRE	300 s	30 s				SP3	Comp. only
JPLOOPSFIN	GE	300 s	30 s	30 s			CLK&SP3	
MITOOPSFIN	GE	300 s	30 s				CLK&SP3	
NGSOOPSFIN	G	300 s						
SIOOOPSFIN	G	900 s					SP3	

**Table 2:** List of analysis center data used in the routine combination of rapid products

Rapid							
Label	system	orbit	clock	attitude	code OSB	phase OSB	Note
CODOOPSRAP	GRE	300 s	30 s	30 s	1 d (GE)	1 d (GE)	
EMROOPSRAP	GR	300 s	300 s				
ESAOOPSRAP	GR	300 s	30 s				
GFZOOPSRAP	GRE	300 s	300 s				
GRGOOPSRAP	GE	300 s	30 s	30 s	1 d (GE)	1 d (GE)	
HUSOMGXRAP	GRE	300 s	30 s	30 s	1 d (GRE)	1 d (GE)	
IGSOOPSRAP	G	900 s	300 s				Comp. only
JGXOOPSRAP	GRE	300 s	30 s				Comp. only
JPLOOPSRAP	GE	300 s	30 s	30 s			
NGSOOPSRAP	G	300 s					
SIOOOPSRAP	G	900 s					
WUMOMGXRAP	GRE	300 s	30 s	30 s	1 d (GRE)	1 d (GE)	

## 2.1 Product combination method

The combination process is a multi-stage, iterative procedure designed to integrate inputs from multiple ACs into a single, robust set of precise products. The method can be summarized as follows:

### 1) Orbit and ERP Combination

The process begins with the ACs' individual orbit and Earth Rotation Parameter (ERP) products. An initial mean orbit is computed, followed by a Helmert transformation to align the solutions into a common reference frame. A weighted mean orbit is then calculated. This stage feeds directly into the generation of the final combined orbit and ERP product. Using the finalized combined orbit and ERP product, satellite attitude information is computed via external software (e.g., GROOPS) to generate the final attitude product.

### 2) Clock and Bias Combination

This stage processes clock and bias products. Prior corrections including radial orbit difference, phase wind-up effect, and antenna model difference are applied, and integer clocks are formed using narrow-lane UPDs. The solutions are aligned to a chosen reference, and statistical outlier detection is performed. An iterative loop (with a maximum of 10 iterations) ensures stability, continuing until the variation in assigned weights between iterations is less than 0.1 %. Once convergence is achieved, phase clocks and OSB estimates are extracted and aligned to GPST.

## 2.2 Combination strategy adjustment

To enhance the precision and robustness of the combined products, key adjustments have been implemented in the combination strategy

### 1) Expansion of orbit combination contributors

The orbit combination process has been strengthened by incorporating products from three additional ACs: NGS, SIO, and MIT. This inclusion leverages a broader set of independent solutions, improving the stability and reliability of the final combined orbit. The effectiveness of this expansion is validated by the Root Mean Square Error (RMSE) of individual AC orbits compared to the combined solution. For instance, in GPS week 2390, the combined orbit (IGS) serves as a stable reference with most ACs showing RMSE values within a close range (e.g., 7 – 11 mm), confirming good overall agreement and a robust mean.

### 2) Enhancement of Galileo phase bias combination

A specific adjustment has been made to refine the combination approach for Galileo X/X channel phase biases. This enhancement explicitly considers the necessary alignment between code and phase biases across different Galileo signal channels (C/Q and X/X). The improvement is quantitatively demonstrated by an increase in the success rates for ambiguity resolution.

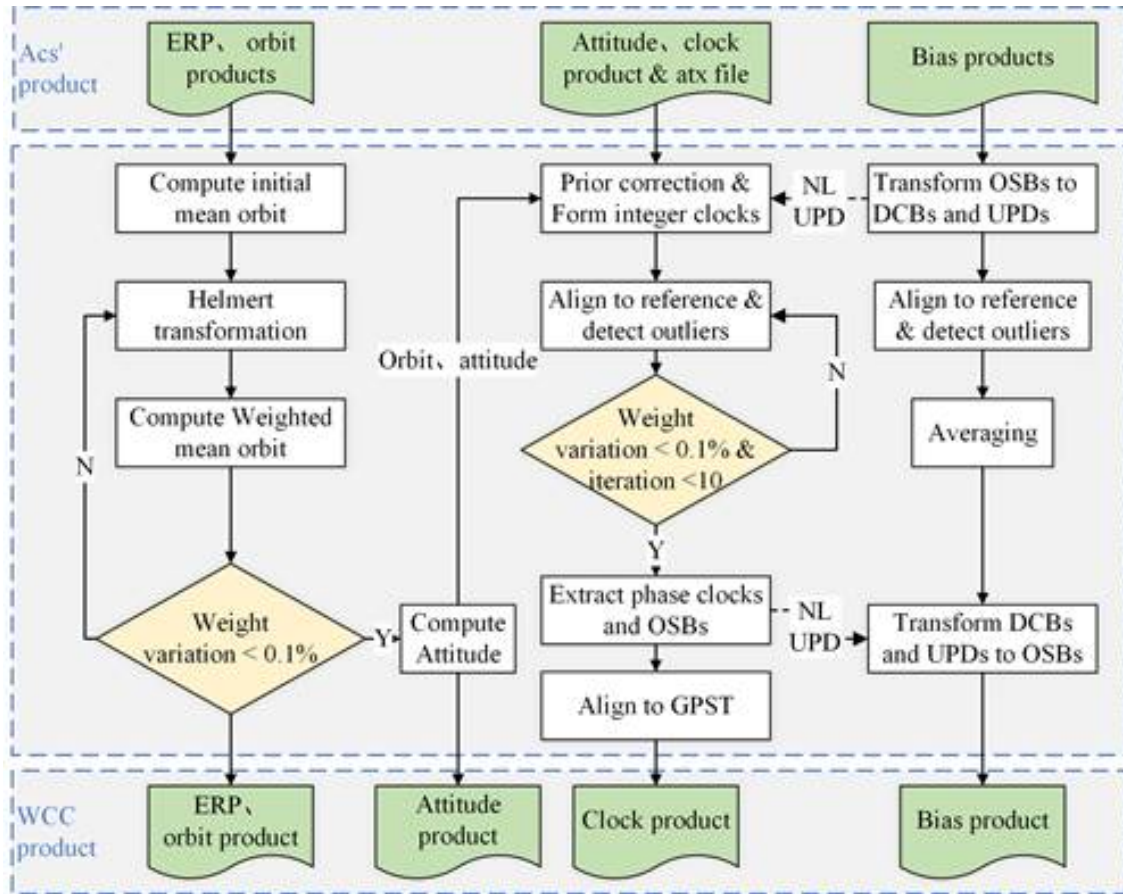


Figure 1: The combination flowchart

The updated WCC strategy (WCC\_new) achieved an average success rate of 98.29 % over a 10-day period, a significant improvement over the previous strategy (WCC\_old) at 97.28 %, and now performs comparably to other leading AC solutions. Furthermore, the positioning performance (North, East, Up components) remains consistent and on par with other solutions, confirming that the bias alignment adjustment enhances ambiguity resolution without compromising solution accuracy.

### 2.3 Main features of WCC combined products

#### 1) Multi-GNSS Orbit, Clock, and Bias Product Combination

The WCC combined products integrates contributions from a global network of ACs, to generate a unified set of products for GPS, GLONASS, and Galileo systems, as well as BDS in the near future. This rigorous combination process does not merely average inputs but employs sophisticated weighted adjustment, outlier detection, and reference alignment

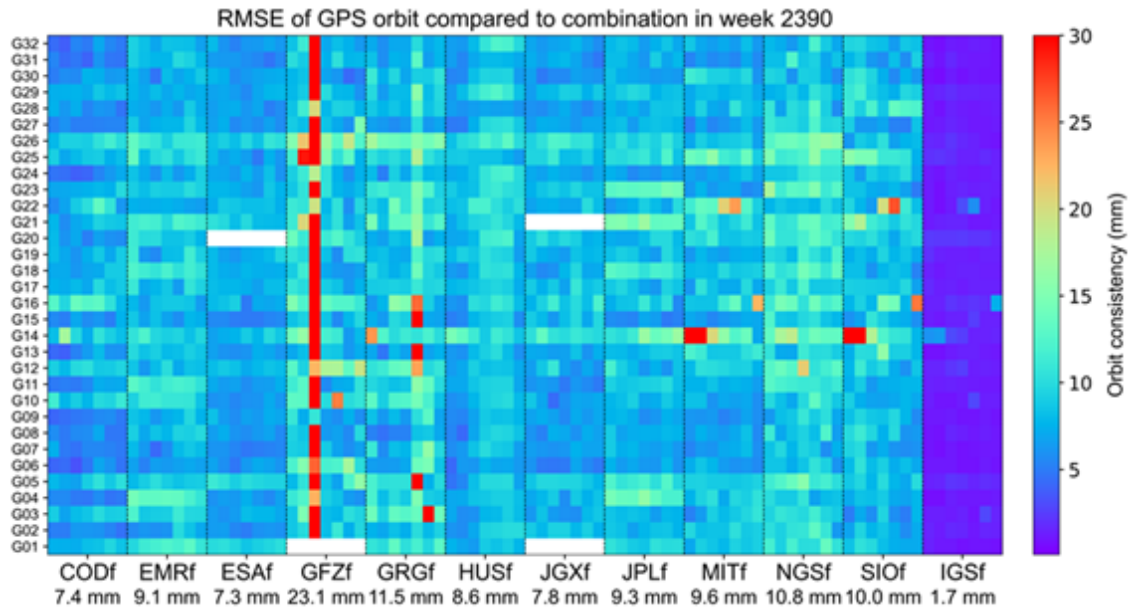


Figure 2: RMSE of GPS orbit compared to combination in week 2390


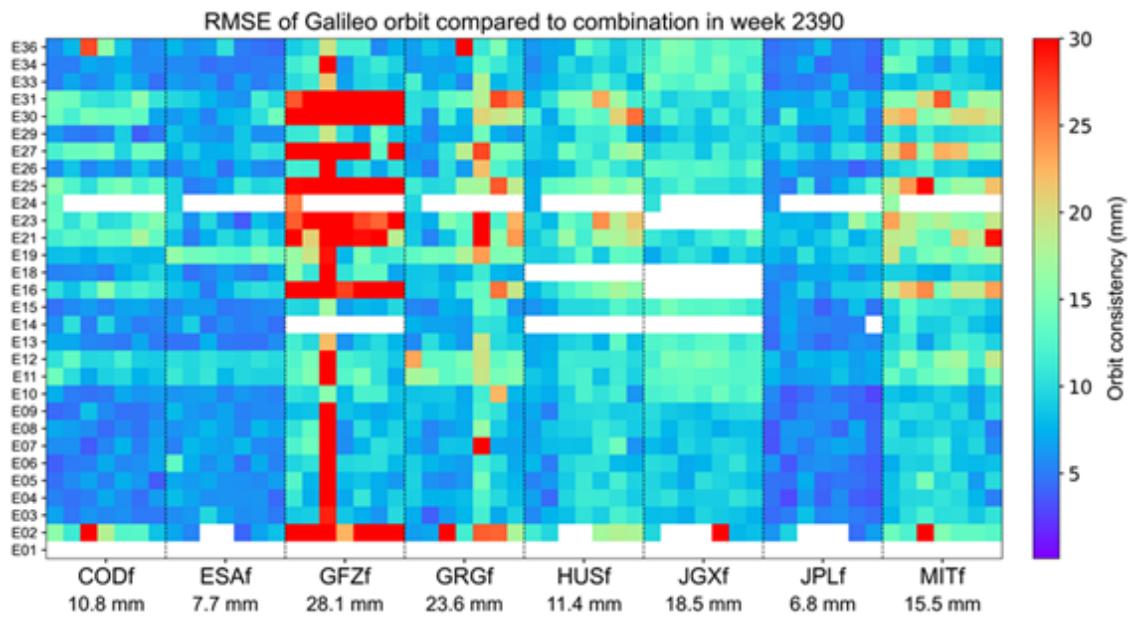


Figure 3: RMSE of Galileo orbit compared to combination in week 2390

strategies. By synthesizing diverse solutions, the final combined orbit, clock (satellite and station), and bias (code and phase) products achieve superior accuracy, robustness, and long-term stability compared to any single AC solution, providing a consistent and

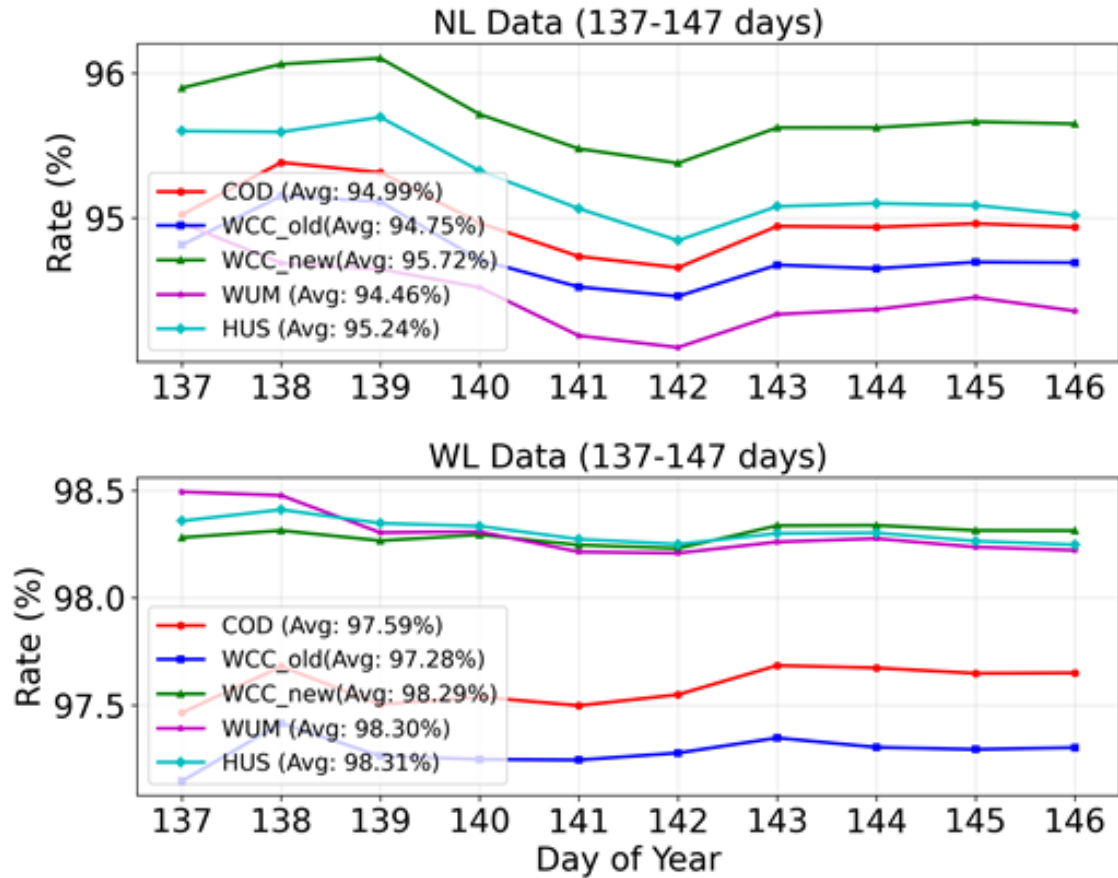

**Figure 4:** Ambiguity fixing rates with the updated WCC strategy and comparison with other AC

authoritative reference for the global user community.

**2) Facilitation of PPP-AR at the user end**

A defining feature of the WCC products is the direct integration of phase bias estimation into the combination. Unlike products that only provide code biases or require users to estimate phase biases independently, WCC generates and delivers consistent Observable-Specific Signal Bias (OSB) products. These products enable users to recover the integer nature of carrier-phase ambiguities in Precise Point Positioning (PPP) processing. This capability is critical for achieving centimeter-level positioning accuracy, significantly reducing convergence times, and enhancing the reliability of precise positioning services across geodetic, atmospheric, and navigation applications.

**3) Ensured Day-Boundary Continuity of Combined Products**

Recognizing that discontinuities at daily boundaries can degrade time-series analysis and long-term applications, the WCC processing strategy specifically addresses this issue. The

generated final products are continuous at the midnight epoch. This feature is particularly vital for time frequency transfer, long-term stability monitoring, and high-precision scientific studies that demand consistent data over extended periods.

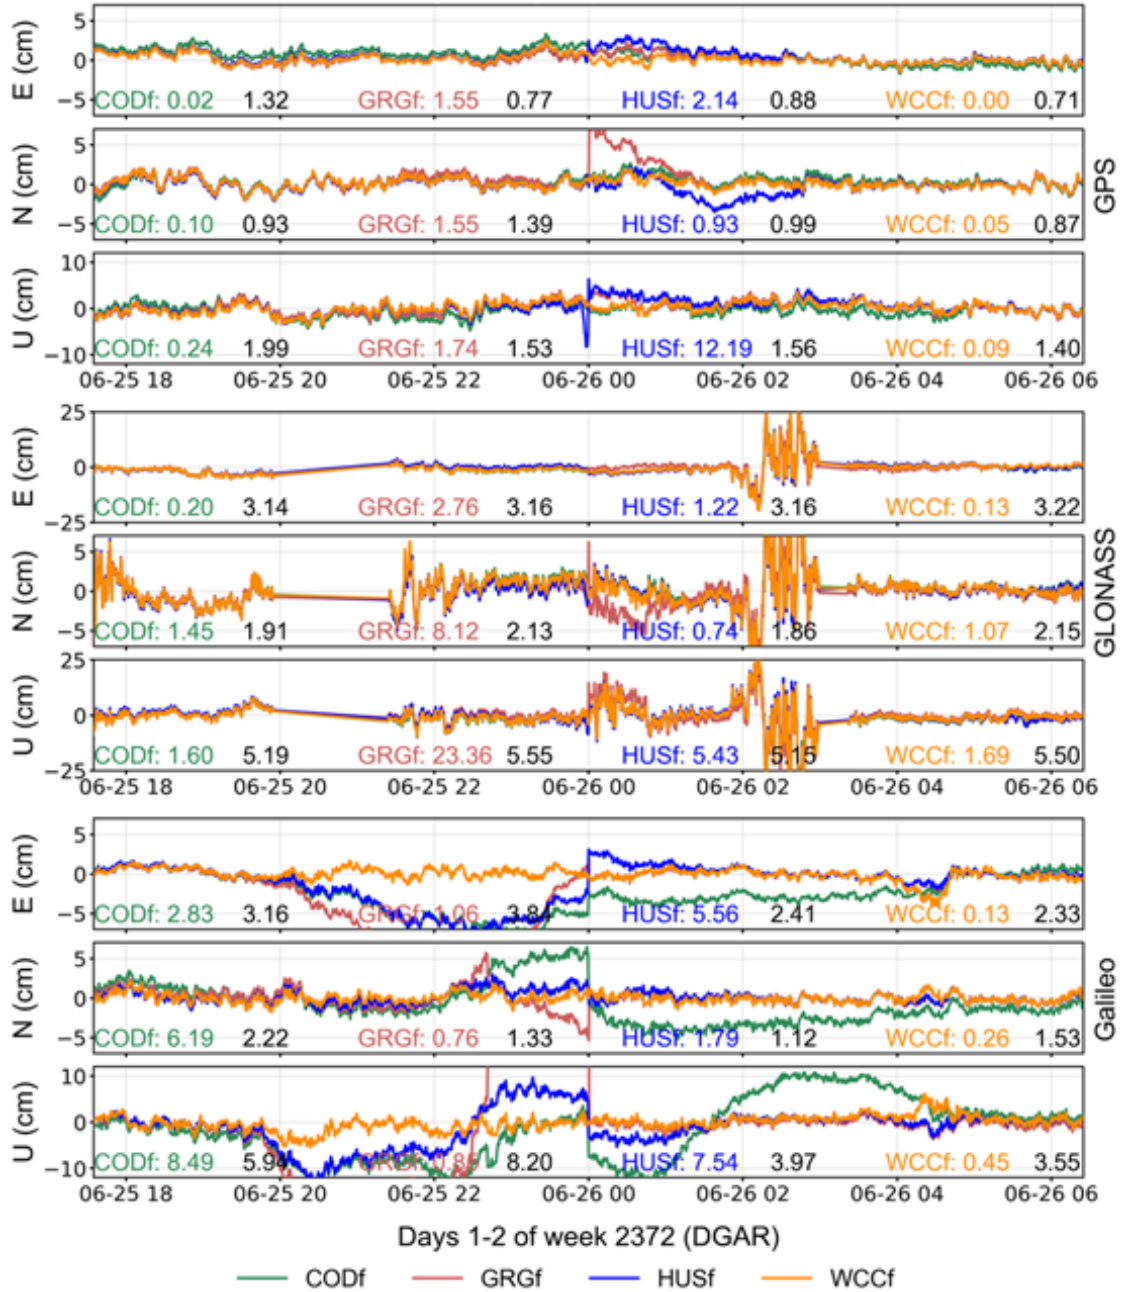


Figure 5: Across days PPP(-AR) results within different final products in week 2372

## 2.4 One-year combined solutions from WCC

### 1) Orbit combination weights and contributions

For the one-year period in 2025 (Days of Year 068–326), the weights assigned to different analysis centers for the combined orbit solution reveal distinct contributions across the GPS, GLONASS, and Galileo constellations. For GPS, COD holds the highest weight at 14.74 %. For GLONASS, COD again leads with a substantial 26.43 % contribution, followed by ESA. Notably, for Galileo, JPL receives the highest weight at 22.87 %. Examining the accumulated contributions up to GPS Week 2933 further details this distribution: for GPS, COD (14.74 %), JPL (7.71 %), and HUS (8.35 %) are key players; for GLONASS, COD dominates at 36.41 %, with ESA at 28.64 % and GRG at 23.91 %; for Galileo, the contributions are more distributed among COD (18.08 %), ESA (15.86 %), GRG (14.96 %), and HUS (11.32 %). These weights, derived from long-term performance evaluations, reflect the relative accuracy and reliability of each center’s orbit products, which are then optimally averaged to create the final, higher-quality IGS combined orbits.

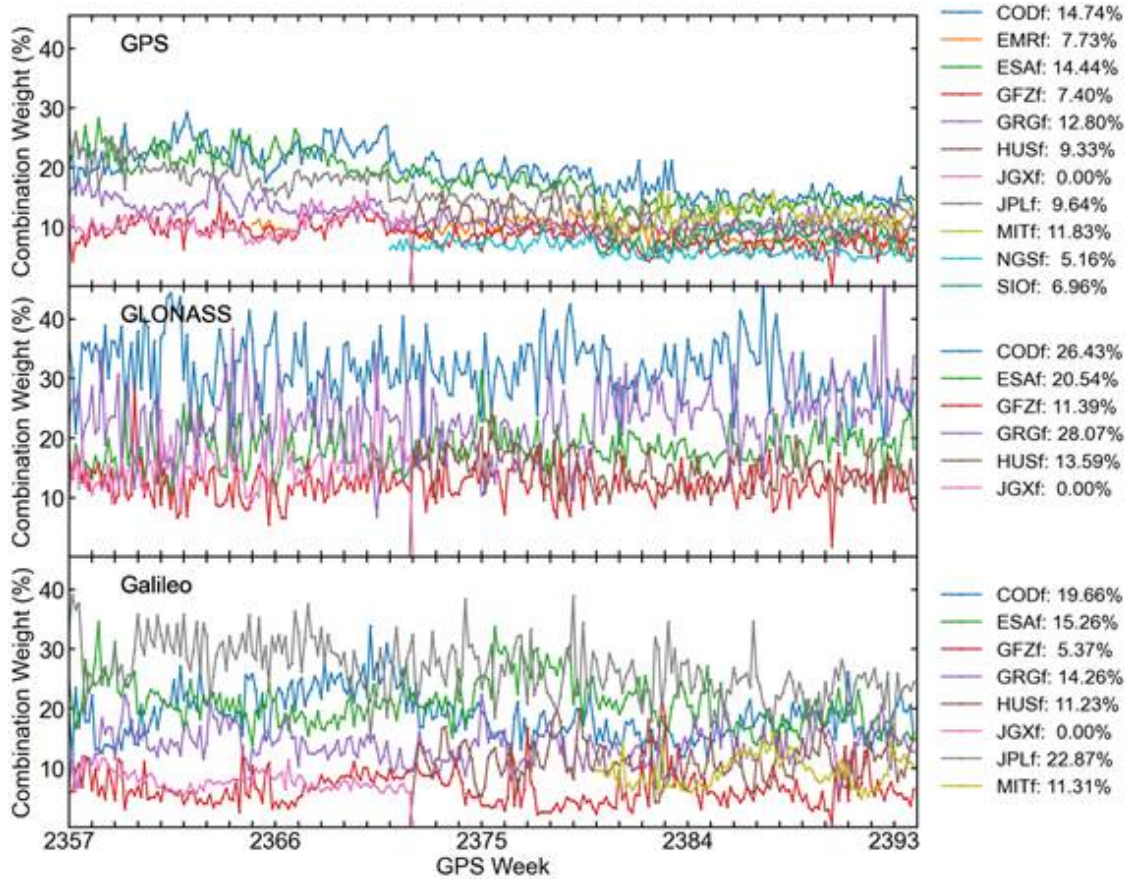


Figure 6: ACs’ orbit contribution to the combination till week 2393

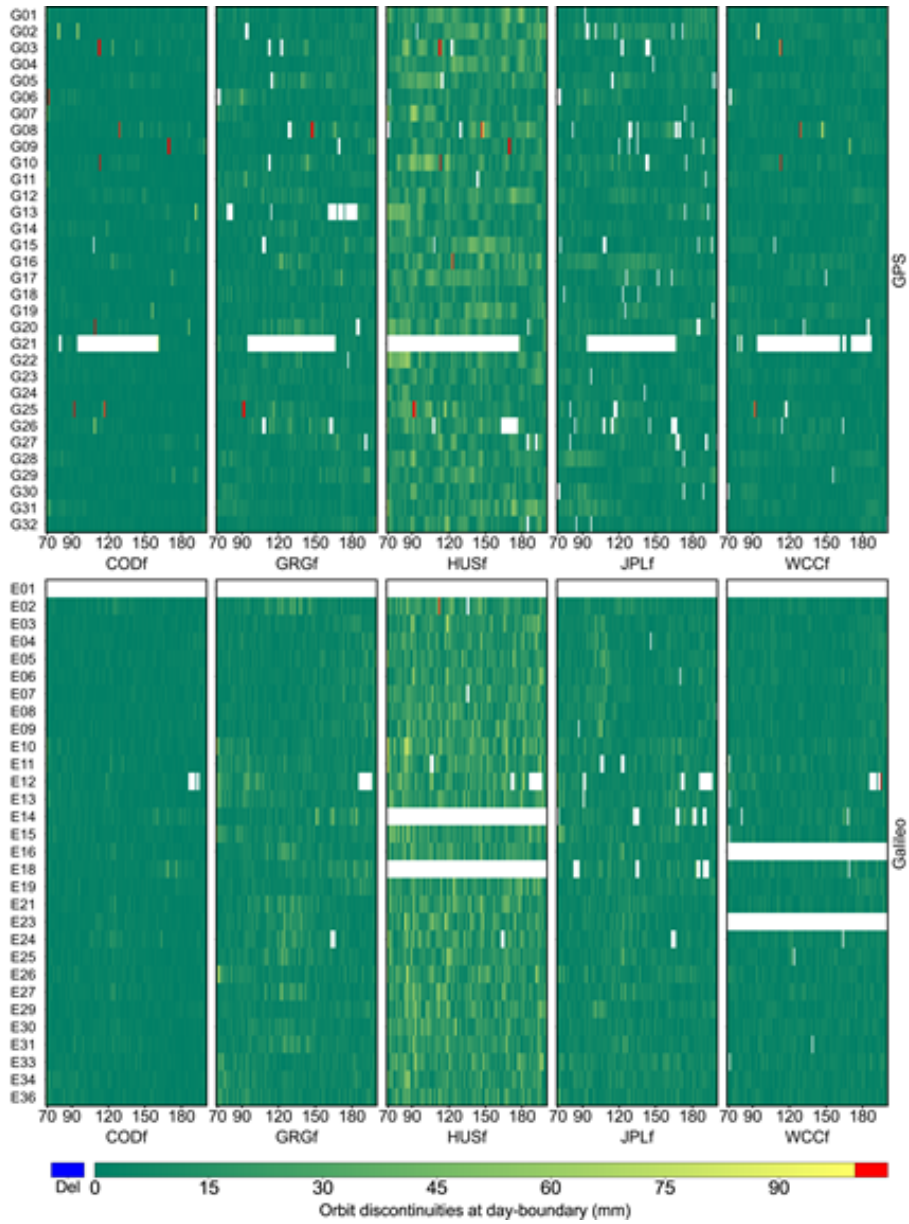


Figure 7: Stability of orbit products from different ACs at daily boundaries


## 2) Orbit day-boundary discontinuity analysis

The stability of orbit products at the boundary between processing days is a critical quality indicator. The analysis for 2025 (DOY 068–200) shows that COD’s orbit products exhibit the smallest day-boundary discontinuities, representing the most stable continuity. Specifically, the radial discontinuity for GPS is lowest for COD at 2.94 mm, compared to 5.92 mm for GRG, 15.88 mm for HUS, 6.34 mm for JPL, and 4.67 mm for WCC. For

Galileo, COD again shows the best stability at 3.13 mm, followed by WCC at 5.01 mm, with GRG, JPL, and HUS showing larger jumps. This metric measures the consistency of orbit estimates at day boundary; smaller values indicate smoother orbits, which are vital for long-term data analysis and real-time applications. GPS orbits generally show smaller discontinuities than Galileo across all centers. WCC’s combined product, while not the absolute best in this specific metric, maintains a very competitive performance close to the top.

**3) Clock and bias combination weights**

In the combination of satellite clock and bias estimates, the contributions from COD and GRG products are the most significant, ranking as the top two contributors. The detailed breakdown of accumulated contributions until GPS Week 2393 highlights the following weight distribution: COD leads with 22.42 %, followed by GRG at 15.78 %, HUS at 15.21 %, ESA at 14.47 %, EMR at 14.13 %, JPL at 9.27 %, and GFZ at 8.73 %. These weights are dynamically determined based on the long-term stability, accuracy, and consistency of each analysis center’s clock solutions. A higher weight signifies that a center’s clock product has consistently agreed well with the collective solution from other centers and has shown low noise and high reliability. The combination process leverages these strengths to generate a “best-estimate” clock product that is more accurate and stable than any single center’s solution alone.

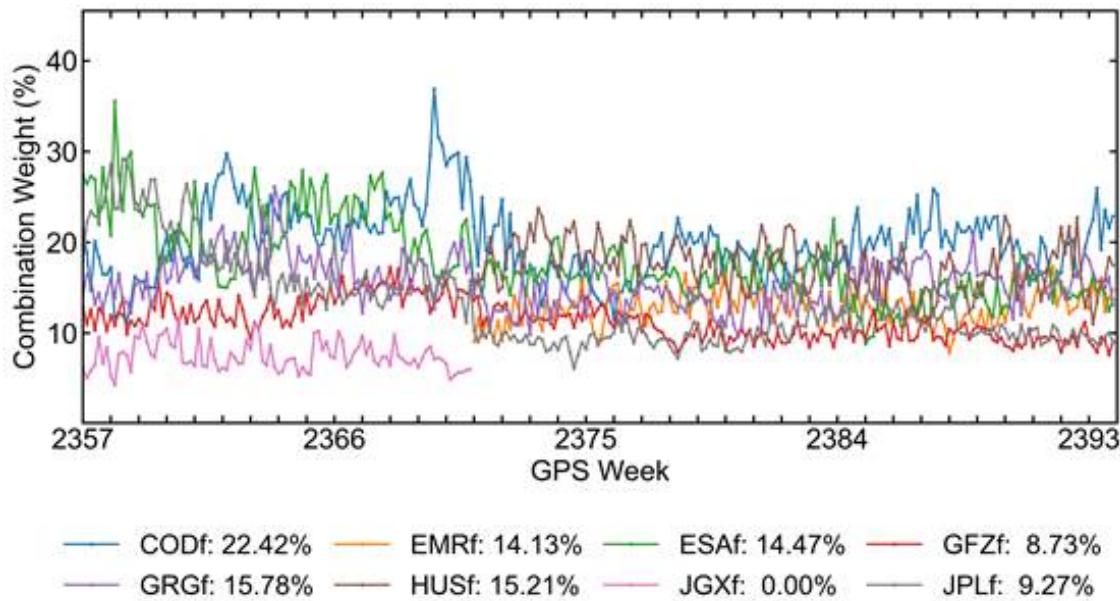

**Figure 8:** ACs’ clock contribution to the combination till week 2393

**4) Clock/Bias day-boundary discontinuity performance**

A standout result from the 2025 evaluation is the exceptional stability of WCC’s integer clock products at day boundaries. The discontinuity values for WCC are orders of mag-

nitude smaller than those of other centers. For GPS, WCC's discontinuity is merely 5.35 picoseconds (ps), compared to 70.56 ps for JPL, 193.50 ps for HUS, 220.74 ps for GRG, and 352.43 ps for COD. For Galileo, WCC's performance is even better at 4.53 ps, while others range from 81.55 ps (JPL) to 200.98 ps (COD). This dramatically lower discontinuity is a direct benefit of using integer clock estimation, which aligns the clock parameters with the integer nature of carrier-phase ambiguities. This results in a much smoother and more consistent time series for satellite clocks, which is fundamentally important for enabling high-precision PPP-AR and for maintaining the coherence of timing applications.

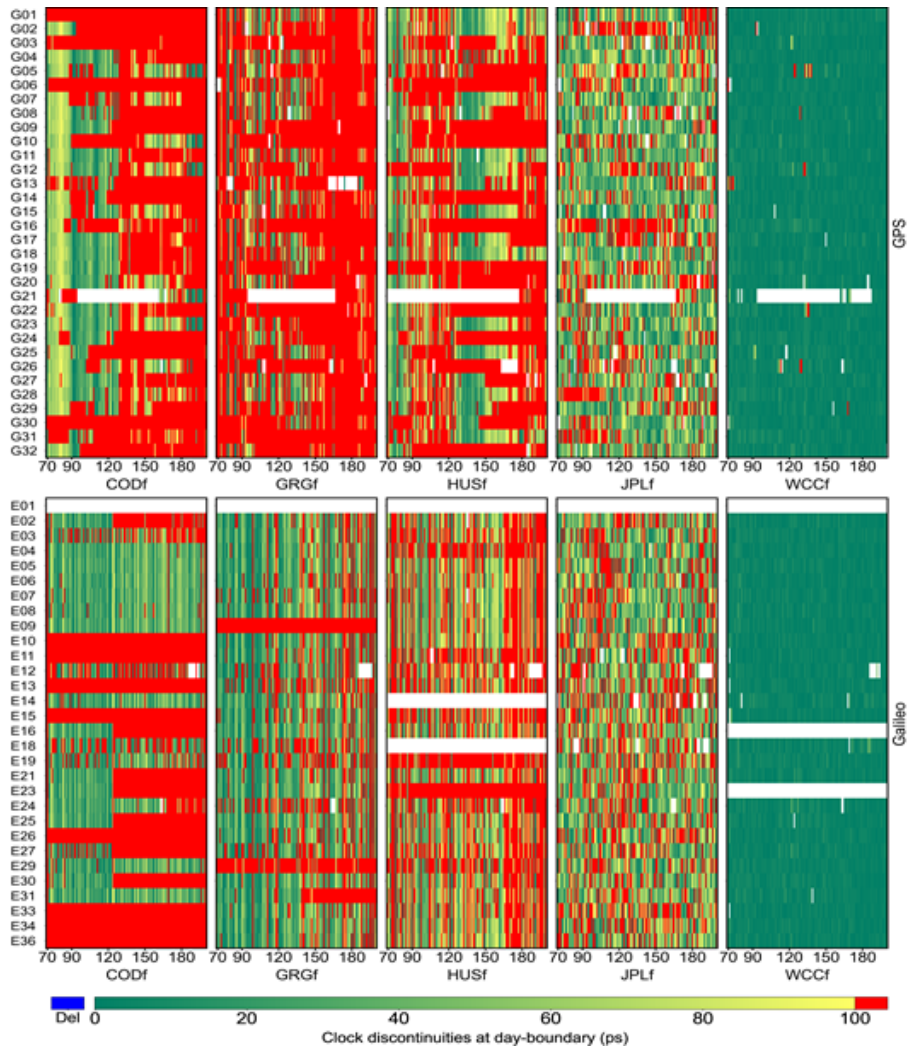


Figure 9: ACs' clock contribution to the combination till week 2393

### 5) Clock stability assessment

The long-term stability of satellite and receiver clocks is evaluated using a set of 9 satellites

from different GPS block types (IIIA, IIIF, etc.) and 6 ground stations equipped with highly stable hydrogen maser frequency standards. The assessment is based on analyzing 7-day arcs of accumulated clock estimates, which helps to characterize the noise and drift behavior over time. The results indicate that the satellite and receiver clock and bias stability is relatively consistent across the different analysis centers (ACs). This consistency implies that the fundamental quality of the estimated clock parameters is high and agreed upon by various independent processing lines. The Modified Allan Deviation or a similar stability measure is likely used to quantify this, showing that the core timing characteristics are reliably captured in the combined solution, ensuring dependable performance for time transfer and long-baseline positioning.

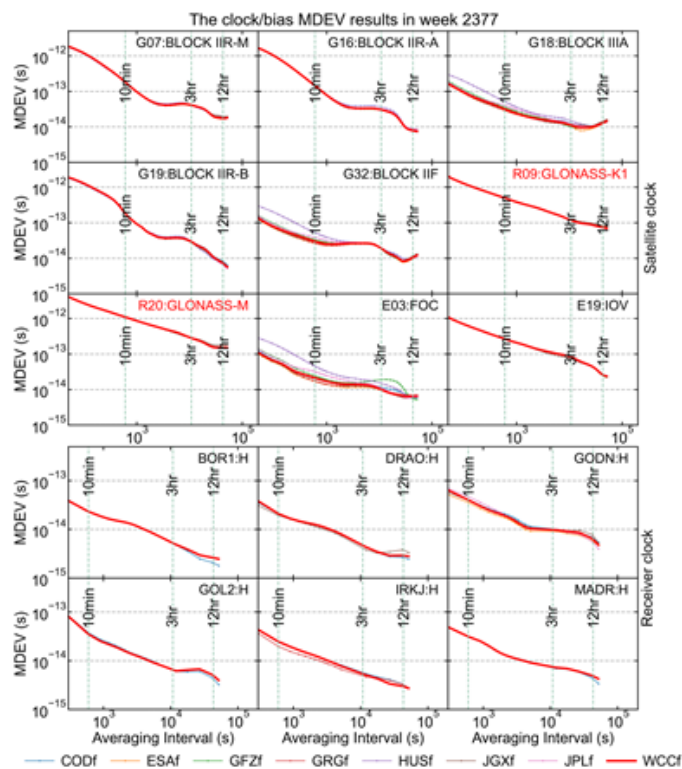


Figure 10: Assessment of long-term stability of satellite and receiver clocks

### 6) PPP-AR validation performance

The PPP-AR validation results clearly demonstrate that the positioning precision achieved using products from the WCC surpasses that of other leading ACs, namely COD, HUS, and GRG. This superior performance indicates that WCC’s combined satellite orbit and clock solutions provide a more accurate and reliable foundation for PPP-AR. This enhancement is crucial for high-precision applications in geodesy, surveying, and scientific research, where millimeter-to-centimeter-level accuracy is required.

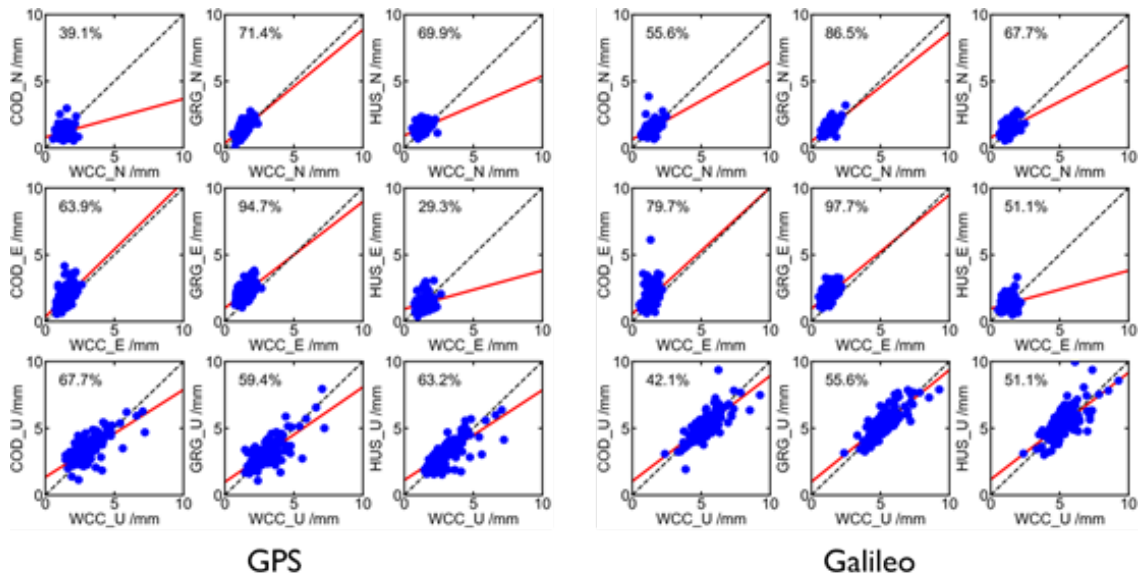


Figure 11: Positioning Accuracy Assessment: WCC vs. COD, HUS, and GRG

## 2.5 The introduction of WCC website and product storage FTP

The cornerstone for public information is the official WCC webpage hosted on the IGS portal at <https://igs.org/wg/wcc>. This site acts as the authoritative source for understanding the center’s mission, scope, and activities. The site also offers news updates, technical descriptions of the combination methodology, and essential links for data access, making it an indispensable resource for researchers, collaborators, and users worldwide who seek to understand the foundation and output of the WCC’s work.

The WCC combined products are accessible at <https://bdspride.com>. This FTPS server forms the technical backbone of the center’s operations. It is the central hub where the combined products — categorized as rapid, and final — are stored and disseminated to the global user community.

## 3 The task force to draw out a new combination statistic format

### 3.1 The background to draw out the new format

Since 1994, the IGS Analysis Center Coordinator (ACC) has consistently executed product combination tasks, generated high-stability combined solutions and established feedback mechanisms to assess AC quality and drive technical advancements. As a core output, the



**Figure 12:** The official WCC webpage on the IGS portal

ACC publishes Summary files (e.g., `IGS00PSRAP_20251850000_01D_01D_CLS.SUM`) covering satellite clock weights, Earth Rotation Parameters (ERP), orbit precision, and Helmert transformation parameters, supported by a web-based visualization system (<http://acc.igs.org/>). However, with the initiation of the third IGS data reprocessing campaign (Repro3), advancements in PPP-AR Working Group (WG), and the efforts of the Wuhan Combination Center (WCC) WG, multi-GNSS combination has become pervasive. Consequently, the traditional reporting architecture no longer satisfies the complex descriptive demands of multi-constellation, multi-frequency, and emerging signal characteristics. To address this, the Working Group on Standardization of Product Combination Statistics Formats was officially established on October 21, 2025, with the approval and support of the IGS Governing Board (GB) and Infrastructure Committee (IC). This group aims to develop comprehensive information standards to assist ACs and PPP users.

### 3.2 Motivation

For ACs, the architectural defects of existing summary files present severe challenges in diagnosing potential product quality issues. First, combination statistics lack a unified standardized format. Orbit (`*SUM.SUM`) and clock (`*CLS.SUM`) data are segregated into disparate files and lack critical combined bias information; this physical and logical separation significantly increases the complexity of data retrieval. Second, visualization capabilities are severely deficient. The absence of supporting plotting programs prevents ACs from intuitively transforming obscure text-based statistics into quality trends (e.g.,

```
cls-file Version 2.0
GPS week: 2373 Day: 5 MJD: 60860
```

RESULTS OF FINAL WEIGHTED COMBINATION

CEN	NREPO	NBEPO	NRCLK	NRBAD	OFFSET (ps)	DRIFT (ps/d)	CLKSDV (ps)	SDVSAT (ps)	SDVSTA (ps)	CLKRMS (ps)	RMSSAT (ps)	RMSSTA (ps)	WEIGHT (%)
brd	96	0	3072	0	-28	50	545	545	0	1119	1119	0	0.00
cod	288	0	32491	266	-875	135	7	6	7	88	123	69	20.09
emr	288	0	21934	524	-1497	-762	19	19	18	89	92	86	5.20
esa	288	0	37225	3274	-4165	693	8	5	9	125	189	90	17.22
gfz	288	0	30567	1405	-376	322	12	12	12	96	130	78	9.71
grg	288	0	8919	567	-724	1414	8	8	0	106	106	0	15.60
iga	96	0	2976	0	10	-55	22	22	0	61	61	0	0.00
igu	96	0	2880	35	-63	333	1122	1122	0	2205	2205	0	0.00
jgx	288	0	33458	918	-70	130	15	20	12	77	71	79	6.20
jpl	288	0	36111	337	-3810	587	9	10	9	68	92	58	14.01
ngs	96	0	2976	4	-5	3	473	473	0	905	905	0	0.00
usn	288	0	32434	651	-2571	517	46	58	41	135	146	130	0.00
whu	288	0	8928	0	28	152	10	10	0	70	70	0	11.97

Figure 13: IGS00PSRAP\_20251850000\_01D\_01D\_CLS.SUM

RMSE heatmaps), limiting the ability to rapidly identify anomaly patterns and assess stability. Finally, existing reports suffer from a critical lack of metadata support. The absence of contextual details — such as AC identifiers, satellite systems, and antenna models — reduces data interpretability and hinders the precise localization of observations.

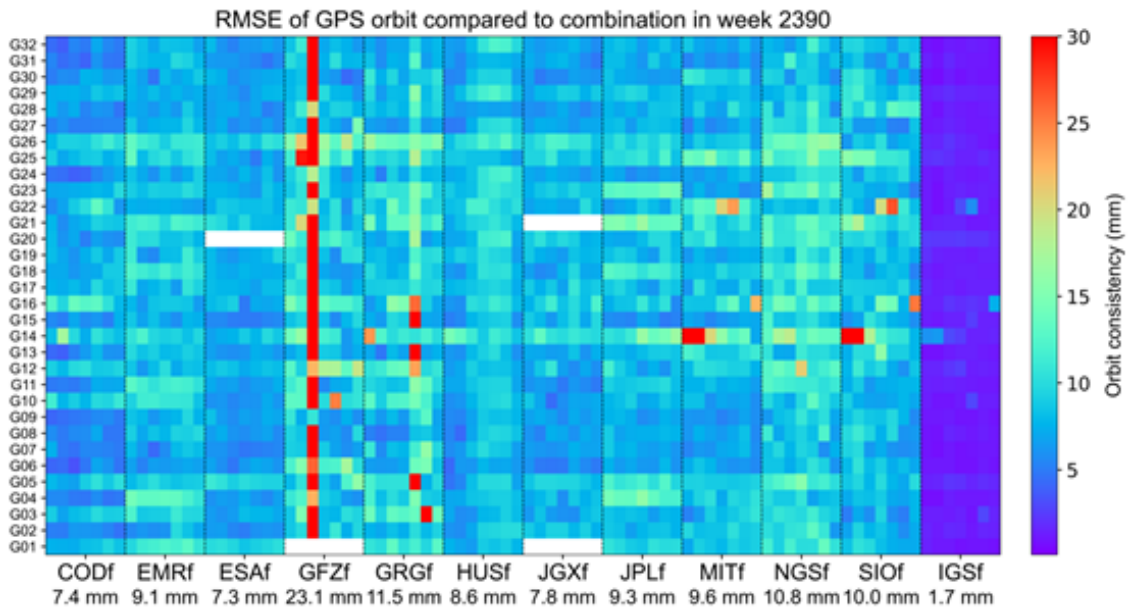


Figure 14: Orbit RMSE heatmaps

For PPP users, existing Summary files fail to provide key statistics, such as specific epochs

for orbit and clock outliers, making it impossible to effectively identify faulty satellites and anomalous periods in AC products. This deficiency allows corrupted data to participate directly in PPP processing, severely compromising positioning convergence speed and final accuracy.

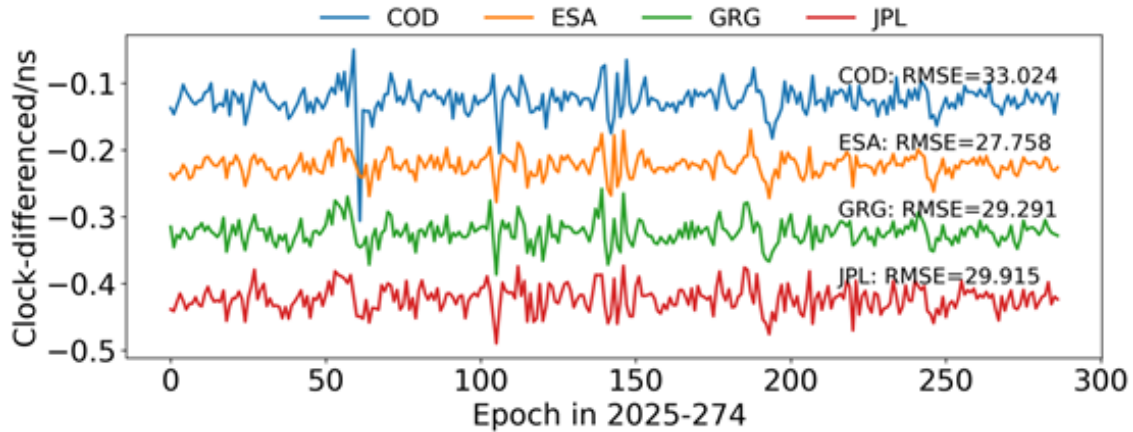


Figure 15: The difference between epochs of the station clock

### 3.3 Goals

This initiative aims to establish a standardized combination statistics format and associated toolset to fulfill three core functions: empowering ACs to efficiently conduct quality self-assessments and diagnostics via clear statistical indicators; providing PPP users with high-precision quality metrics to identify and exclude outliers in orbits, clocks, and biases for ensured positioning reliability; and developing auxiliary plotting tools to enable automated visualization, thereby comprehensively enhancing the efficiency of data analysis and application.

### 3.4 The KOM of the task force

On December 16, 2025, IGS Task Force for the format standard of the combination statistics held its Kick-off Meeting (KOM) to formally establish the strategic direction and outline the preliminary planning for the new generation of statistical standard formats. The meeting centered on the motivation and goals of the standardization, featuring in-depth discussions on four key technical topics: 1) the logical basis for the primary classification index (Analysis Center name vs. product type); 2) the technical selection of data interchange formats (comparison of JSON vs. SINEX adaptability); 3) the necessity of including multi-frequency signal biases in the statistical scope; and 4) the integration strategy for ERP combination information.

Specifically, the meeting first conducted an in-depth review of the historical limitations inherent in the traditional IGS summary file system (e.g., \*CLS.SUM and \*SUM.SUM). It was confirmed that the legacy system can no longer satisfy the urgent demands of ACs for refined quality monitoring, nor does it meet the requirements of PPP users for high-precision and high-reliability positioning. Consequently, the meeting formally established three core strategic goals for the new generation standard format: establishing a format for ACs to easily inspect their product problems, creating a format for PPP users to exclude outliers (e.g., orbits, clocks, and bias), and developing auxiliary tools to plot the relevant statistics of combination results. Building upon these defined objectives, the meeting further outlined the content architecture of the new format, preliminarily identifying four core modules: Introductory Information (to record context such as AC strategies, reference frames, and antenna models), followed by integrated statistics modules for clock, orbit, and bias. Furthermore, the meeting held an in-depth discussion regarding the technical selection of data interchange formats. To balance the scientific community's traditions with modern IT interoperability, three candidate formats were selected for subsequent testing and evaluation: SINEX (continuing the general standard in geodesy), JSON (adapted for efficient Web transmission and parsing), and YAML (balancing human readability with machine parsing). Finally, the meeting proposed a significant recommendation to include information related to coordinate combination in the new format, thereby ensuring a more comprehensive file system.

## References

- Geng, J., Yan, Z., Wen, Q., Männel, B., Masoumi, S., Loyer, S., Mayer-Gürr, T., and Schaer, S. Integrated satellite clock and code/phase bias combination in the third IGS reprocessing campaign. *GPS solutions*, 28(3), 150. doi: <https://doi.org/10.1007/s10291-024-01693-9>
- Geng, J., Wen, Q., Chen, G., Dumitraschkewitz, P., and Zhang, Q. All-frequency IGS phase clock/bias product combination to improve PPP ambiguity resolution. *Journal of Geodesy*, 98(6), 48. doi: <https://doi.org/10.1007/s00190-024-01865-y>
- Lin, J., Geng, J., and Zhang, Q. Aligning GPS/Galileo/BDS satellite integer clock products across day boundaries for continuous time and frequency transfer. *Journal of Geodesy*, 99(5), 35.
- Wen, Q., Geng, J., Deng, Y., and Zhang, Y. Validating the IGS products in mitigating day-boundary discontinuities of kinematic positioning and time transfer. *GPS Solutions*, 29(4), 170.



# Center for Orbit Determination in Europe (CODE) Analysis Center Technical Report 2025

R. Dach<sup>1</sup>, S. Schaer<sup>2</sup>, D. Arnold<sup>1</sup>, E. Brockmann<sup>1</sup>, M. Kalarus<sup>1</sup>, C. Kobel<sup>1</sup>,  
M. Lasser<sup>1</sup>, U. Meyer<sup>1</sup>, P. Stebler<sup>1</sup>, A. Jäggi<sup>1</sup>,  
A. Villiger<sup>2</sup>, D. Ineichen<sup>2</sup>, S. Lutz<sup>2</sup>, L. Prange<sup>2</sup>,  
D. Thaller<sup>3</sup>, L. Klemm<sup>3</sup>, S. Modiri<sup>3</sup>, A. Rülke<sup>3</sup>, W. Söhne<sup>3</sup>, J. Bouman<sup>3</sup>,  
U. Hugentobler<sup>4</sup>, B. Duan<sup>4</sup>

<sup>1</sup> Astronomical Institute, University of Bern, Bern, Switzerland  
E-mail: [code@aiub.unibe.ch](mailto:code@aiub.unibe.ch)

<sup>2</sup> Federal Office of Topography swisstopo, Wabern, Switzerland

<sup>3</sup> Federal Agency of Cartography and Geodesy,  
Frankfurt a. M., Germany

<sup>4</sup> Institute for Astronomical and Physical Geodesy,  
Technical University of Munich, Germany

## 1 The CODE consortium

CODE, the Center for Orbit Determination in Europe, is a joint venture of the following four institutions:

- Astronomical Institute, University of Bern (AIUB), Bern, Switzerland
- Federal Office of Topography swisstopo, Wabern, Switzerland
- Federal Agency of Cartography and Geodesy (BKG), Frankfurt a. M., Germany
- Institute for Astronomical and Physical Geodesy, Technical University of Munich (IAPG, TUM), Munich, Germany

The operational computations are performed at AIUB, whereas IGS-related reprocessing activities are usually carried out at IAPG, TUM. All solutions and products are generated with the latest development version of the Bernese GNSS Software ([Dach et al., 2015a](#)).

## 2 CODE products available to the public

A wide range of GNSS solutions based on a rigorously combined GPS/GLONASS/Galileo data processing scheme is computed at CODE supporting the following IGS legacy product chains:

- **Ultra-rapid series** with several updates per day (GPS+GLONASS+Galileo).  
The ultra-rapid products contain also a prediction for near-real time applications.  
List of result files are provided in Table 1.
- **Rapid series** is computed once per day (GPS+GLONASS+Galileo).  
Note that there is an update of the rapid solution, see [Dach et al. \(2015b\)](#).  
List of result files are provided in Table 2.
- **Final series** is submitted once per week (GPS+GLONASS+Galileo).  
Until GPS week 2037 (November 27<sup>th</sup>, 2022) the final solution did only consider GPS+GLONASS measurements.  
List of result files are provided in Table 3.

The products are made available through anonymous ftp at:

<ftp://ftp.aiub.unibe.ch/CODE/> or  
<http://ftp.aiub.unibe.ch/CODE/> or  
<http://www.aiub.unibe.ch/download/CODE/>

With GPS week 2238, the IGS started to use a new product filenaming scheme. The tables provide both, the new and old product filenames.

Furthermore, CODE contributes to the IGS MGEX project with a five-system solution considering GPS, GLONASS, Galileo, BeiDou, and QZSS where the related products are published at:

[ftp://ftp.aiub.unibe.ch/CODE\\_MGEX/](ftp://ftp.aiub.unibe.ch/CODE_MGEX/) or  
[http://www.aiub.unibe.ch/download/CODE\\_MGEX/](http://www.aiub.unibe.ch/download/CODE_MGEX/)

Up to the inclusion of Galileo into CODE's final solution in GPS week 2238 (November 28<sup>th</sup>, 2022), the triple-system solution (GPS, GLONASS, Galileo) from CODE's rapid processing is also kept accessible at:

[ftp://ftp.aiub.unibe.ch/CODE/yyyy\\_M](ftp://ftp.aiub.unibe.ch/CODE/yyyy_M) or

[http://www.aiub.unibe.ch/download/CODE/yyyy\\_M/](http://www.aiub.unibe.ch/download/CODE/yyyy_M/)

An

overview of the related product files is given in Table 4.

Tables 5 and 6 compile the product files submitted by CODE to the IGS data centers.

Within the table the following abbreviations are used:

yyyy	Year (four digits)	ddd	Day of Year (DOY) (three digits)
yy	Year (two digits)	www	GPS Week
yymm	Year, Month	wwwd	GPS Week and Day of week

A new download environment will become active in mid of 2026. Related information can be obtained at [https://www.bernese.unibe.ch/docs/new\\_download\\_server.pdf](https://www.bernese.unibe.ch/docs/new_download_server.pdf).

**Table 1:** CODE's ultra-rapid products available through anonymous ftp.

---

CODE *ultra-rapid* products available at <ftp://ftp.aiub.unibe.ch/CODE>

---

COD00PSULT.SP3 (old: COD.EPH_U)	CODE ultra-rapid GNSS orbits (GPS+GLONASS+Galileo) with 5 minutes sampling
COD00PSULT.ERP (old: COD.ERP_U)	CODE ultra-rapid ERPs belonging to the ultra-rapid GNSS orbit product
COD00PSULT.TRO (old: COD.TRO_U)	CODE ultra-rapid troposphere product, troposphere SINEX format
COD00PSULT.SNX (old: COD.SNX_U.Z)	SINEX file from the CODE ultra-rapid solution containing station coordinates, ERPs, and satellite antenna Z-offsets
COD00PSULT_TRO.SNX (old: COD_TRO.SNX_U.Z)	CODE ultra-rapid solution, as above but with troposphere parameters for selected sites, SINEX format
COD00PSULT.SUM (old: COD.SUM_U)	Summary of stations used for the latest ultra-rapid orbit product
COD00PSULT.ION (old: COD.ION_U)	Last update of CODE rapid ionosphere product (1 day) complemented with ionosphere predictions (2 days), Bernese format
COD00PSULT_yyyyddd0000_01D_05M_ORB.SP3 (old:CODwwwd.EPH_U)	CODE ultra-rapid GNSS orbits from the 24UT solution available until the corresponding early rapid orbit is available (to ensure a complete coverage of orbits even if the early rapid solution is delayed after the first ultra-rapid solution of the day)
COD00PSULT_yyyyddd0000_01D_01D_ERP.ERP (old: CODwwwd.ERP_U)	CODE ultra-rapid ERPs belonging to the above ultra-rapid GNSS orbits

---

The CODE ultra-rapid products are provided with static filenames containing the latest results.

---

Result files for CODE 5-day GNSS *orbit predictions* available at <ftp://ftp.aiub.unibe.ch/CODE>

---

COD00SPRD_05D.SP3 (old: COD.EPH_5D)	CODE 5-day GNSS orbit predictions
COD00SPRD_yyyyddd0000_05D_05M_ORB.SP3 (old: CODwwwd.EPH_5D)	CODE 5-day GNSS orbit predictions
COD00SPRD_yyyyddd0000_21D_06H_ERP.ERP (old: CODwwwd.ERP_5D)	CODE predicted ERPs belonging to the predicted orbits

---

Note, that as soon as a final product is available the corresponding rapid, ultra-rapid, or predicted products are removed from the anonymous FTP server.

**Table 2:** CODE's rapid products available through anonymous ftp.

---

CODE *early rapid* products: GPS+GLONASS+Galileo; third day of a 72-hour solution available at <ftp://ftp.aiub.unibe.ch/CODE>

---

COD00PSRAP\_yyyyddd0000\_01D\_05M\_ORB.SP3 (old: CODwwwwd.EPH\_R)  
 CODE early rapid GNSS orbits with 5 minutes sampling

COD00PSRAP\_yyyyddd0000\_01D\_01D\_ERP.ERP (old: CODwwwwd.ERP\_R)  
 CODE early rapid ERPs belonging to the early rapid orbits

COD00PSRAP\_yyyyddd0000\_01D\_30S\_CLK.CLK (old: CODwwwwd.CLK\_R)  
 COD00PSRAP\_yyyyddd0000\_01D\_30S\_CLK.CLK\_V2  
 CODE GNSS clock product related to the early rapid orbit, clock RINEX format (versions 3.04 and 2.00)

COD00PSRAP\_yyyyddd0000\_01D\_01H\_TR0.TR0 (old: CODwwwwd.TR0\_R)  
 CODE rapid troposphere product, troposphere SINEX format

COD00PSRAP\_yyyyddd0000\_01D\_01D\_SOL.SNX (old: CODwwwwd.SNX\_R.Z)  
 SINEX file from the CODE rapid solution containing station coordinates, ERPs, and satellite antenna Z-offsets, SINEX format

COD00PSRAP\_yyyyddd0000\_01D\_02H\_TR0.SNX (old: CODwwwwd\_TR0.SNX\_R.Z)  
 CODE rapid solution, as above but with troposphere parameters for selected sites, SINEX format

COD00PSRAP\_yyyyddd0000\_01D\_01D\_OSB.BIA  
 Code/phase biases related to the early rapid orbit and clock corrections, Bias-SINEX format  
 Note: Integer-cycle clocks in conjunction with accompanying code/phase biases enable PPP-AR ([ftp://ftp.aiub.unibe.ch/CODE/IAR\\_README.TXT](ftp://ftp.aiub.unibe.ch/CODE/IAR_README.TXT))

COD00PSRAP\_yyyyddd0000\_01D\_30S\_ATT.OBX  
 Satellite attitude, ORBEX format

---



---

CODE *final rapid* products: GPS+GLONASS+Galileo; middle day of a long-arc solution where the rapid observations were completed by a subsequent ultra-rapid dataset available at <ftp://ftp.aiub.unibe.ch/CODE>

---

CODMOPSRAP\_yyyyddd0000\_01D\_05M\_ORB.SP3 (old: CODwwwwd.EPH\_M)  
 CODE final rapid GNSS orbits with 5 minutes sampling

CODMOPSRAP\_yyyyddd0000\_01D\_01D\_ERP.ERP (old: CODwwwwd.ERP\_M)  
 CODE final rapid ERPs belonging to the final rapid orbits

CODMOPSRAP\_yyyyddd0000\_01D\_30S\_CLK.CLK (old: CODwwwwd.CLK\_M)  
 CODMOPSRAP\_yyyyddd0000\_01D\_30S\_CLK.CLK\_V2  
 CODE GNSS clock product related to the final rapid orbit, clock RINEX format (versions 3.04 and 2.00)

CODMOPSRAP\_yyyyddd0000\_01D\_01D\_OSB.BIA  
 Code/phase biases related to the final rapid orbit and clock corrections, Bias-SINEX format  
 Note: Integer-cycle clocks in conjunction with accompanying code/phase biases enable PPP-AR ([ftp://ftp.aiub.unibe.ch/CODE/IAR\\_README.TXT](ftp://ftp.aiub.unibe.ch/CODE/IAR_README.TXT))

---

Note, that as soon as a final product is available the corresponding rapid, ultra-rapid, or predicted products are removed from the anonymous FTP server.

**Table 2:** CODE's rapid products available through anonymous ftp (continued).

---

Result files for CODE *rapid ionosphere* solution  
available at <ftp://ftp.aiub.unibe.ch/CODE>

---

COD00PSRAP_yyyyddd0000_01D_01H_GIM.INX.gz (old: CORGddd0.yyI)	CODE rapid ionosphere product, IONEX format
COD00PSRAP_yyyyddd0000_01D_01H_GIM.ION (old: CODwwwd.ION_R)	CODE rapid ionosphere product, Bernese format
COD00PSRAP_yyyyddd0000_01D_01D_GIM.RNX (old: CGIMddd0.yyN_R)	Improved Klobuchar-style coefficients based on CODE rapid ionosphere product, RINEX format
<hr/>	
COD00SPRD_yyyyddd0000_01D_01H_GIM.INX.gz (old: COPGddd0.yyI)	CODE ionosphere predictions, IONEX format
COD00SPRD_yyyyddd0000_01D_01H_GIM.ION (old: CODwwwd.ION_P)	CODE ionosphere predictions, Bernese format
COD00SPRD_yyyyddd0000_01D_01D_GIM.RNX (old: CGIMddd0.yyN_P)	Predictions of improved Klobuchar-style coefficients, RINEX format

---

Result files for CODE *bias product* generation  
available at <ftp://ftp.aiub.unibe.ch/CODE>

---

P1C1.DCB	CODE sliding 30-day P1–C1 DCB solution, Bernese format, containing only the GPS satellites
P1P2.DCB	CODE sliding 30-day P1–P2 DCB solution, Bernese format, containing the GPS and GLONASS satellites
P1P2_ALL.DCB	CODE sliding 30-day P1–P2 DCB solution, Bernese format, containing the GPS and GLONASS satellites and all stations used
P1P2_GPS.DCB	CODE sliding 30-day P1–P2 DCB solution, Bernese format, containing only the GPS satellites
P1C1_RINEX.DCB	CODE sliding 30-day P1–C1 DCB values directly extracted from RINEX observation files, Bernese format, containing the GPS and GLONASS satellites and all stations used
P2C2_RINEX.DCB	CODE sliding 30-day P2–C2 DCB values directly extracted from RINEX observation files, Bernese format, containing the GPS and GLONASS satellites and all stations used
CODE.DCB	Combination of P1P2.DCB and P1C1.DCB
CODE_FULL.DCB	Combination of P1P2.DCB, P1C1.DCB (GPS satellites), P1C1_RINEX.DCB (GLONASS satellites), and P2C2_RINEX.DCB
CODE.BIA	Same content but stored as OSBs in the Bias SINEX format
CODE_MONTHLY.BIA	Cumulative monthly OSB solution in Bias SINEX format

---

Note, that as soon as a final product is available the corresponding rapid, ultra-rapid, or predicted products are removed from the anonymous FTP server.

**Table 3:** CODE's final products available through anonymous ftp.

---

CODE *final* products available at <ftp://ftp.aiub.unibe.ch/CODE/yyyy/>

---

COD00PSFIN\_yyyyddd0000\_01D\_05M\_ORB.SP3.gz (old: CODwwwwd.EPH.Z)  
CODE final GPS+GLONASS+Galileo orbits

COD00PSFIN\_yyyyddd0000\_01D\_01D\_ERP.ERP.gz (old: CODwwwwd.ERP.Z)  
CODE final ERPs belonging to the final orbits

COD00PSFIN\_yyyyddd0000\_01D\_30S\_CLK.CLK.gz (old: CODwwwwd\_v3.CLK.Z)  
COD00PSFIN\_yyyyddd0000\_01D\_30S\_CLK.CLK\_V2.gz (old: CODwwwwd.CLK.Z)  
CODE final clock product, clock RINEX format (versions 3.04 and 2.00), with a sampling of 30 sec for the GNSS satellite and reference (station) clock corrections and 5 minutes for all other station clock corrections

COD00PSFIN\_yyyyddd0000\_01D\_05S\_CLK.CLK.gz (old: CODwwwwd\_v3.CLK\_05.Z)  
COD00PSFIN\_yyyyddd0000\_01D\_05S\_CLK.CLK\_V2.gz (old: CODwwwwd.CLK\_05S.Z)  
CODE final clock product, clock RINEX format (versions 3.04 and 2.00), with a sampling of 5 sec for the GNSS satellite and reference (station) clock corrections and 5 minutes for all other station clock corrections

COD00PSFIN\_yyyyddd0000\_01D\_01D\_0SB.BIA.gz (old: CODwwwwd.BIA.Z)  
CODE daily code and phase bias solution corresponding to the above mentioned clock products, bias SINEX format v1.00  
See [ftp://ftp.aiub.unibe.ch/CODE/IAR\\_README.TXT](ftp://ftp.aiub.unibe.ch/CODE/IAR_README.TXT) for the usage of the phase biases.

COD00PSFIN\_yyyyddd0000\_01D\_30S\_ATT.OBX.gz (old: CODwwwwd.OBX.Z)  
Satellite attitude information in ORBEX format

COD00PSFIN\_yyyyddd0000\_01D\_01D\_SOL.SNX.gz (old: CODwwwwd.SNX.Z)  
CODE daily final solution, SINEX format

COD00PSFIN\_yyyyddd0000\_01D\_01H\_TR0.TR0.gz (old: CODwwwwd.TR0.Z)  
CODE final troposphere product, troposphere SINEX format

COD00PSFIN\_yyyyddd0000\_01D\_01H\_GIM.INX.gz (old: CODGddd0.yyI.Z)  
CODE final ionosphere product, IONEX format

COD00PSFIN\_yyyyddd0000\_01D\_01H\_GIM.ION.gz (old: CODwwwwd.ION.Z)  
CODE final ionosphere product, Bernese format

COD00PSFIN\_yyyyddd0000\_01D\_01D\_GIM.RNX.gz (also still available: CGIMddd0.yyN.Z)  
Improved Klobuchar-style ionosphere coefficients, navigation RINEX format

COD00PSFIN\_yyyyddd0000\_07D\_07D\_SOL.SNX.gz (old: CODwwww7.SNX.Z)  
CODE weekly final solution, SINEX format (only for Sunday of the related week)

COD00PSFIN\_yyyyddd0000\_07D\_01D\_ERP.ERP.gz (old: CODwwww7.ERP.Z)  
Collection of the 7 daily CODE-ERP solutions of the week (only for Sunday of the related week)

COD00PSFIN\_yyyyddd0000\_07D\_01D\_SUM.SUM.gz (old: CODwwww7.SUM.Z)  
CODE weekly summary file (only for Sunday of the related week)

---

CODE *final bias* products available at <ftp://ftp.aiub.unibe.ch/CODE/yyyy/>

---

P1C1yymm.DCB.Z	CODE monthly P1–C1 DCB solution, Bernese format, containing only the GPS satellites
P1P2yymm.DCB.Z	CODE monthly P1–P2 DCB solution, Bernese format, containing the GPS and GLONASS satellites
P1P2yymm_ALL.DCB.Z	CODE monthly P1–P2 DCB solution, Bernese format, containing the GPS and GLONASS satellites and all stations used
P1C1yymm_RINEX.DCB.Z	CODE monthly P1–C1 DCB values directly extracted from RINEX observation files, Bernese format, containing the GPS and GLONASS satellites and all stations used
P2C2yymm_RINEX.DCB.Z	CODE monthly P2–C2 DCB values directly extracted from RINEX observation files, Bernese format, containing the GPS and GLONASS satellites and all stations used

---

**Table 4:** CODE’s MGEX products available through anonymous ftp.

CODE MGEX products available at [ftp://ftp.aiub.unibe.ch/CODE\\_MGEX/CODE/yyyy/](ftp://ftp.aiub.unibe.ch/CODE_MGEX/CODE/yyyy/)

---

<code>CODOMGXFIN_yyyyddd0000_01D_05M_ORB.SP3.gz</code>	(old: <code>COMwwwwd.EPH.Z</code> )
CODE MGEX final GNSS orbits for GPS, GLONASS, Galileo, BeiDou, and QZSS satellites, SP3 format	
<code>CODOMGXFIN_yyyyddd0000_01D_12H_ERP.ERP.gz</code>	(old: <code>COMwwwwd.ERP.Z</code> )
CODE MGEX final ERPs belonging to the MGEX final orbits	
<code>CODOMGXFIN_yyyyddd0000_01D_30S_CLK.CLK.gz</code>	(old: <code>COMwwwwd_v3.CLK.Z</code> )
	(old: <code>COMwwwwd.CLK.Z</code> version 2.00)
CODE MGEX final clock product consistent to the MGEX final orbits, clock RINEX format (version 3.04), with a sampling of 30 sec for the GNSS satellite and reference (station) clock corrections and 5 minutes for all other station clock corrections	
<code>CODOMGXFIN_yyyyddd0000_01D_01D_OSB.BIA.gz</code>	(old: <code>COMwwwwd.BIA.Z</code> )
GNSS code and phase biases related to the MGEX final clock correction product, bias SINEX format v1.00	
See <a href="ftp://ftp.aiub.unibe.ch/CODE/IAR_README.TXT">ftp://ftp.aiub.unibe.ch/CODE/IAR_README.TXT</a> for the usage of the phase biases.	
<code>CODOMGXFIN_yyyyddd0000_01D_30S_ATT.OBX.gz</code>	(old: <code>COMwwwwd.OBX.Z</code> )
Satellite attitude information in ORBEX format	

---

**Table 5:** CODE final products available in the product areas of the IGS data centers.

Files generated from three–day long–arc solutions:

---

<code>COD00PSFIN_yyyyddd0000_01D_05M_ORB.SP3.gz</code>	(old: <code>codwwwwd.eph.Z</code> )
GNSS ephemeris/clock data in daily files at 15–min intervals in SP3 format, including accuracy codes computed from a long–arc analysis	
<code>COD00PSFIN_yyyyddd0000_01D_01D_ERP.ERP.gz</code>	(old: <code>codwwwwd.erp.Z</code> )
GNSS ERP (pole, UT1–UTC) solution belonging to the COD–orbit files in IGS IERS ERP format	
<code>COD00PSFIN_yyyyddd0000_01D_01D_SOL.SNX.gz</code>	(old: <code>codwwwwd.snx.Z</code> )
GNSS daily coordinates/ERP/GCC from the long–arc solution in SINEX format	
<code>COD00PSFIN_yyyyddd0000_01D_30S_CLK.CLK.gz</code>	(old: <code>codwwwwd_v3.clk.Z</code> )
<code>COD00PSFIN_yyyyddd0000_01D_30S_CLK.CLK_V2.gz</code>	(old: <code>codwwwwd.clk.Z</code> )
GNSS satellite and receiver clock corrections at 30–sec intervals referring to the COD–orbits from the long–arc analysis in clock RINEX format (versions 3.04 and 2.00)	
<code>COD00PSFIN_yyyyddd0000_01D_05S_CLK.CLK.gz</code>	(old: <code>codwwwwd_v3.clk_05s.Z</code> )
<code>COD00PSFIN_yyyyddd0000_01D_05S_CLK.CLK_V2.gz</code>	(old: <code>codwwwwd.clk_05s.Z</code> )
GNSS satellite and receiver clock corrections at 5–sec intervals referring to the COD–orbits from the long–arc analysis in clock RINEX format (versions 3.04 and 2.00)	
<code>COD00PSFIN_yyyyddd0000_01D_01D_OSB.BIA.gz</code>	(old: <code>codwwwwd.bia.Z</code> )
CODE daily code and phase bias solution corresponding to the above mentioned clock products	
<code>COD00PSFIN_yyyyddd0000_01D_30S_ATT.OBX.gz</code>	(old: <code>codwwwwd.obx.Z</code> )
Satellite attitude information in ORBEX format	
<code>COD00PSFIN_yyyyddd0000_01D_01H_TR0.TR0.gz</code>	(old: <code>codwwwwd.tro.Z</code> )
GNSS 2–hour troposphere delay estimates obtained from the long–arc solution in troposphere SINEX format	
<code>COD00PSFIN_yyyyddd0000_07D_01D_ERP.ERP.gz</code>	(old: <code>codwww7.erp.Z</code> )
GNSS ERP (pole, UT1–UTC) solution, collection of the 7 daily COD–ERP solutions of the week in IGS IERS ERP format	
<code>COD00PSFIN_yyyyddd0000_07D_01D_SUM.SUM.gz</code>	(old: <code>codwww7.sum</code> )
Analysis summary for 1 week	

---

Note that the COD–series is identical with the files posted at the CODE’s aftp server, see Table 3.

**Table 5:** CODE final products available in the product areas of the IGS data centers (continued).

---

Other product files (not available at all data centers):

---

`COD00PSFIN_yyyyddd0000_01D_01H_GIM.INX.gz` (old: `CODGddd0.yyI.Z`)  
GNSS hourly global ionosphere maps in IONEX format, including satellite and receiver P1–P2 code bias values

`CODNOPSFIN_yyyyddd0000_01D_01H_GIM.INX.gz` (old: `CKMGddd0.yyI.Z`)  
GNSS daily Klobuchar-style ionospheric (alpha and beta) coefficients in IONEX format

`CODKOPSFIN_yyyyddd0000_01D_01H_GIM.INX.gz` (old: `GPSGddd0.yyI.Z`)  
Klobuchar-style ionospheric (alpha and beta) coefficients from GPS navigation messages represented in IONEX format

---

**Table 6:** CODE MGEX products available in the product areas of the IGS data centers.

---

Files generated from three-day long-arc MGEX solutions:

---

`CODOMGXFIN_yyyyddd0000_01D_05M_ORB.SP3.gz`  
CODE MGEX final GNSS orbits for GPS, GLONASS, Galileo, BeiDou, and QZSS satellites, SP3 format

`CODOMGXFIN_yyyyddd0000_01D_12H_ERP.ERP.gz`  
CODE MGEX final ERPs belonging to the MGEX final orbits

`CODOMGXFIN_yyyyddd0000_01D_30S_CLK.CLK.gz`  
CODE MGEX final clock product consistent to the MGEX final orbits, clock RINEX 3.04 format, with a sampling of 30sec for the GNSS satellite and reference (station) clock corrections and 5 minutes for all other station clock corrections

`CODOMGXFIN_yyyyddd0000_01D_01D_OSB.BIA.gz`  
GNSS code and phase (GPS and Galileo only) biases related to the MGEX final clock correction product, Bias SINEX format v1.00

`CODOMGXFIN_yyyyddd0000_01D_30S_ATT.OBX.gz`  
Satellite attitude information in ORBEX format

---

Note that the `COD-MGEX`-series is identical with the files posted at the CODE’s `aftp` server, see [Table 4](#).

## Referencing of the products

The products from CODE have been registered and should be referenced as:


- Dach, R., S. Schaer, D. Arnold, E. Brockmann, M. Kalarus, C. Kobel, M. Lasser, P. Stebler, A. Jäggi (2026). *CODE final product series for the IGS*. Published by Astronomical Institute, University of Bern. URL: <https://www.aiub.unibe.ch/download/CODE>; DOI: 10.48620/97773.
- Dach, R., S. Schaer, D. Arnold, E. Brockmann, M. Kalarus, C. Kobel, M. Lasser, P. Stebler, A. Jäggi (2026). *CODE rapid product series for the IGS*. Published by Astronomical Institute, University of Bern. URL: <https://www.aiub.unibe.ch/download/CODE>; DOI: 10.48620/97772.
- Dach, R., S. Schaer, D. Arnold, E. Brockmann, M. Kalarus, C. Kobel, M. Lasser, P. Stebler, A. Jäggi (2026). *CODE ultra-rapid product series for the IGS*. Published by Astronomical Institute, University of Bern. URL: <https://www.aiub.unibe.ch/download/CODE>; DOI: 10.48620/97774.
- Dach, R., S. Schaer, D. Arnold, E. Brockmann, M. Kalarus, C. Kobel, M. Lasser, P. Stebler, A. Jäggi (2026). *CODE product series for the IGS MGEX project*. Published by Astronomical Institute, University of Bern. URL: [https://www.aiub.unibe.ch/download/CODE\\_MGEX](https://www.aiub.unibe.ch/download/CODE_MGEX); DOI: 10.48620/97775.

## 3 Statistics on the CODE solution


### 3.1 Selected general statistics

The network used by CODE for the final and MGEX processing is shown in Figure 1. In autumn 2025, 66 sites were added to the CODE final solution. Stations were selected by geometrical location, data availability and coordinate repeatability performance. This is also illustrated in Figure 2 where the number of stations are plotted that are contributing with measurements from the various GNSS to the operational CODE final solution.

The development of the included satellite systems in the CODE solution is illustrated in Figure 3. Since May 2003 CODE is generating all its products for the IGS legacy series based on a combined GPS and GLONASS solution. Since 2012 the MGEX solution from CODE contains Galileo satellites and with beginning of 2014 also the satellites from the Asian systems BeiDou and QZSS. In March 2021, the BeiDou 3 constellation was added to the processing. For that reason a jump in the number of processed BeiDou satellites appears in the plot. End of 2025, the MGEX solution includes about 124 satellites of five satellite systems. Since Feb. 8, 2026 (week 2405) BDS-2 satellites are no longer processed (switching to L1/L5 instead of L2/L6). Therefore, the MGEX CODE orbit products

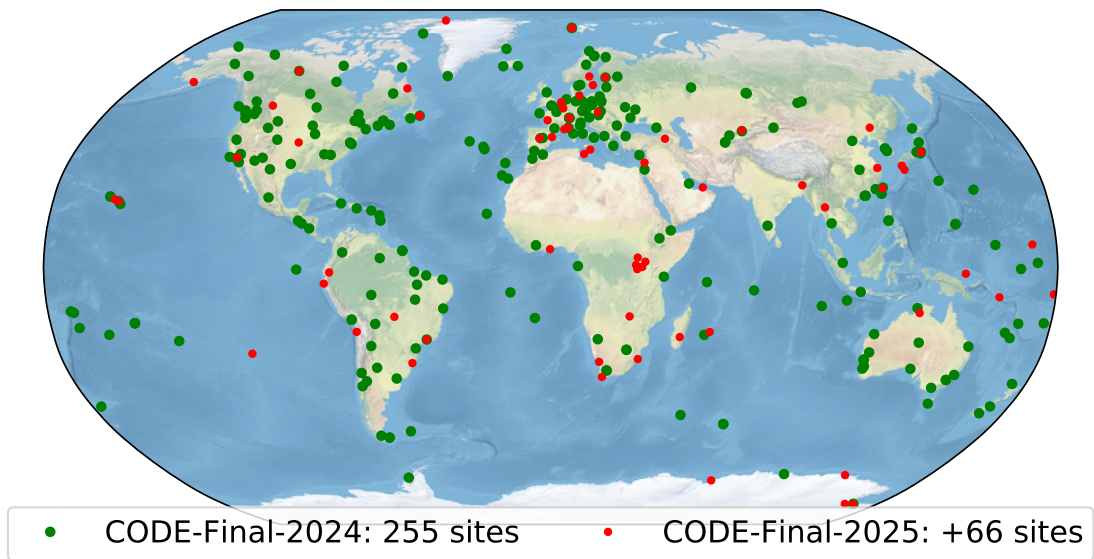


(a) Final solution: increased in autumn 2025 by 66 sites (from 255 to 321 sites)

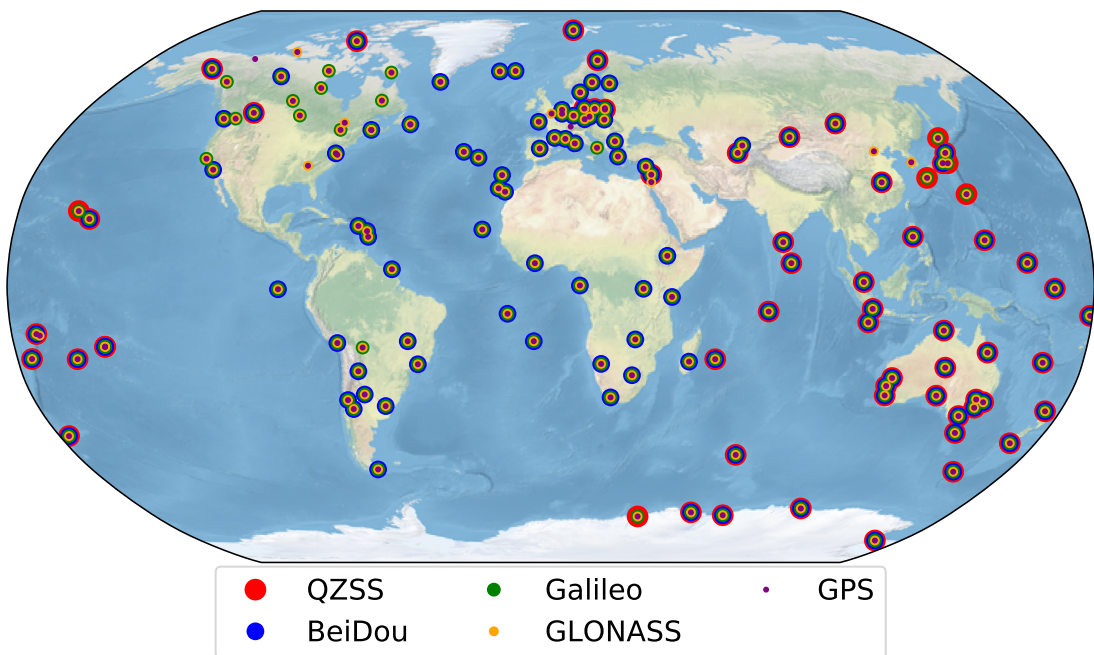


(b) MGEX solution (more than 140 stations)

**Figure 1:** Network used for the processing at CODE by the end of 2025. contain in total 10 satellites less since then.

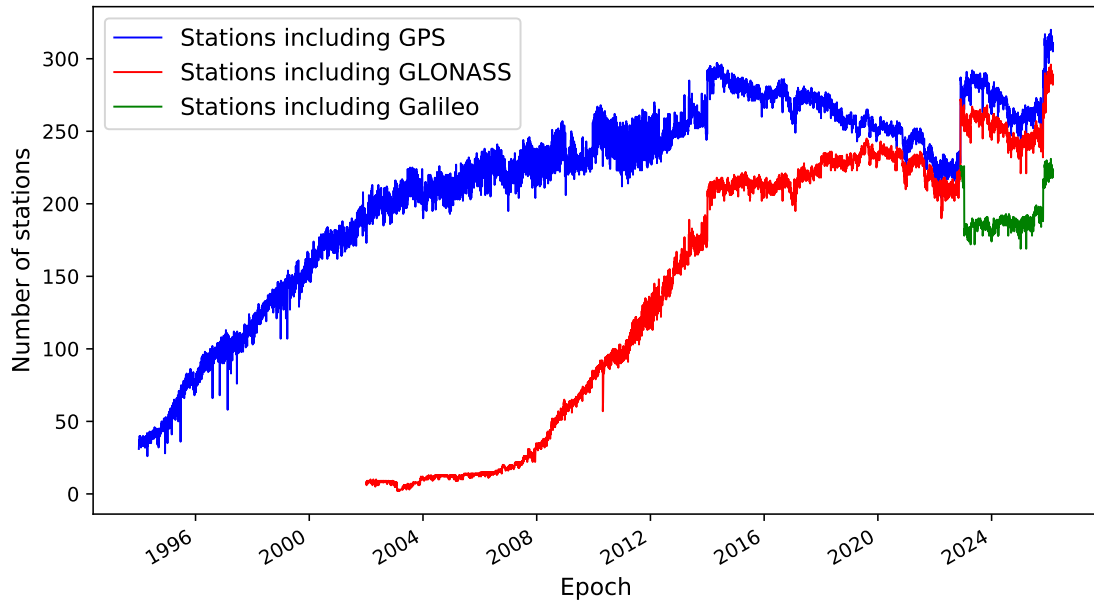

**Figure 2:** Development of the number of stations contributing to the operational CODE final solution with measurements from the various GNSS.

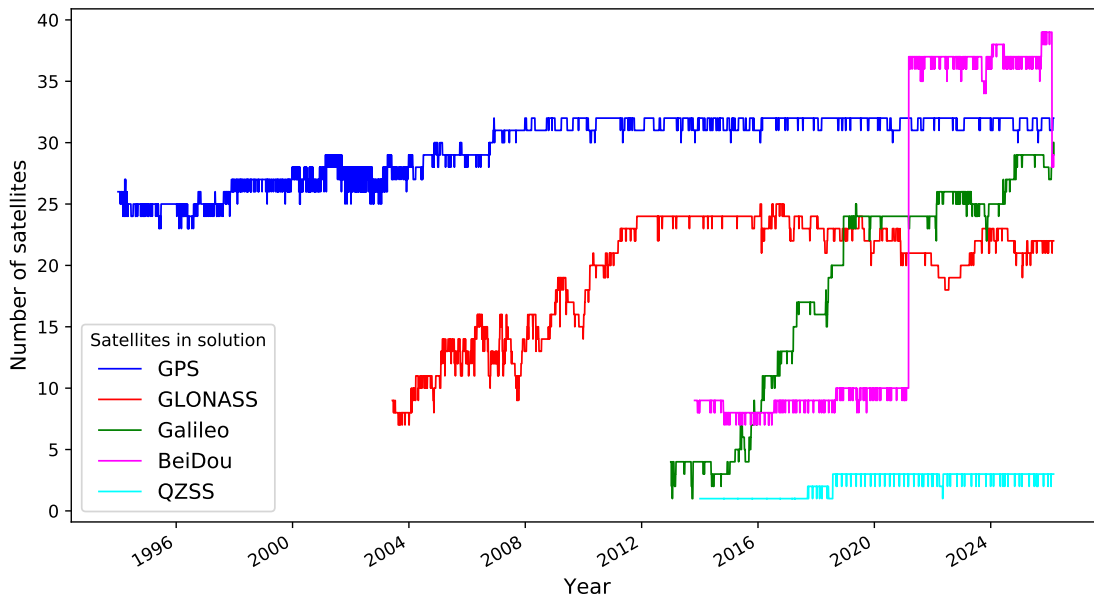

**Figure 3:** Development of the number of satellites in the CODE orbit products (operational final and MGEX).

**Table 7:** Selected events and modifications of the CODE processing during 2025 (and beginning 2026).

Date	DoY/Year	Description
11-Jan-2025	011/2025	Gemoagnetic pole handling updated.
02-Feb-2025	033/2025	IGS20 -> IGb20 (week 2353).
06-Feb-2025	037/2025	MGEX-QZSS: L1C/L2L -> L1C/L5Q.
17-Feb-2025	048/2025	Activated IGRF14.
14-Nov-2025	318/2025	Addition of 66 stations to IGS final products.
02-Dec-2025	336/2025	IGS20_2388.ATX: SINEX code for G079, E225, E226, E227, E232 labeled IGS20_2353.
12-Jan-2026	012/2026	IGb20 -> IGc20 (week 2401) and switch to IGS20_2401.ATX.
08-Feb-2026	039/2026	MGEX-BeiDou: L1/L5 instead of L2/L6, now w/o BeiDou-2.

## 4 Changes in the daily processing for the IGS

The CODE processing scheme for daily IGS analyses is constantly subject to updates and improvements. The changes of the previous year 2024 were published in the last technical report in [Dach et al. \(2025\)](#).


Table 7 gives an overview of the major changes implemented during the year 2025. Details on the analysis strategy can be found in the IGS analysis questionnaire at the IGS Central Bureau (<https://files.igs.org/pub/center/analysis/code.acn>).

Several other improvements not listed in Table 7 were implemented, too. Those mainly concern data download and management, sophistication of CODE's analysis strategy, software changes (improvements), and many more. As these changes are virtually not relevant for users of CODE products, they will not be detailed on any further.

## 5 Verifying the multi-GNSS processing strategy at CODE

CODE started the practice of a rigorous combination of observations from various GNSS more than 20 years ago. It is expected that

- Receiver antenna – even from different GNSS – refer to one point. This implies
  - the scale of each GNSS is fully consistent.
  - Antenna phase center offsets are perfectly calibrated across the systems.
  - No deficiency in antenna phase center variations does map into troposphere model.
- There is only a constant hardware delays in the receiver independent from the different signals from the various GNSS.

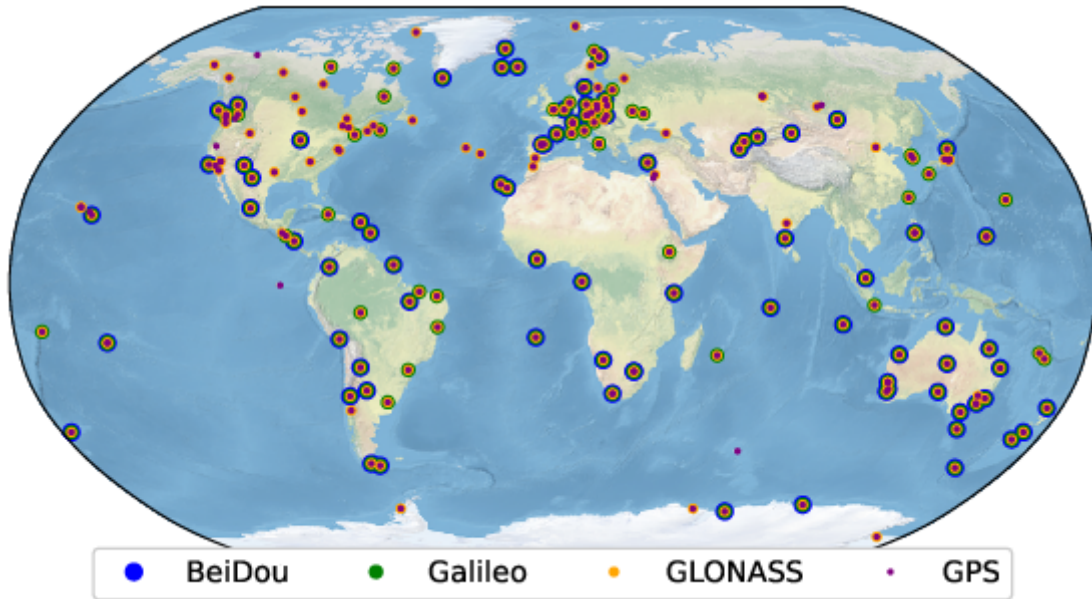


**Figure 4:** Network from CODE’s final solution that has been used for the test solutions (network as of 2024).

In particular with the last assumption a strong Connection between the measurements from various GNSS a achieved. On the other hand, it sets the most stringent requirements to the receiver and antenna hardware.

In the past, only a few old GPS+GLONASS receivers from the 1990ties did require some subdaily variations for the hardware delays (Dach et al., 2010). Nevertheless there are a number of analysis centers (e.g., ESA or MIT) that did decide to keep the receiver clock corrections independent for each system. Of course offers this approach more flexibility, since the contributions from the various systems can be combined on normal equation level (after pre-eliminating the huge number of clock parameters). At the same time, it reduces the redundancy of the parameter estimation by the number of epochs minus one for each station and involved system.

Whether it is justified to apply the closer connection of the observations from the different GNSS by only one intersystem bias per station, system and day or whether independent receiver clock corrections per GNSS are needed is assessed by generating both solution types. The network CODE is using for its final processing is used (see Figure 4). Both solution series have been generated over a period from 2020 to end of 2024. As far as the recivers did support and the antennas have been calibrated, up to four systems have been considered in the processing: GPS, GLONASS, Galileo, and BeiDou.

The usual quality parameters like, a posteriori unit of weight from the parameter adjustment, ambiguity resolution rate etc. did not show an unexpected behaviour indicating

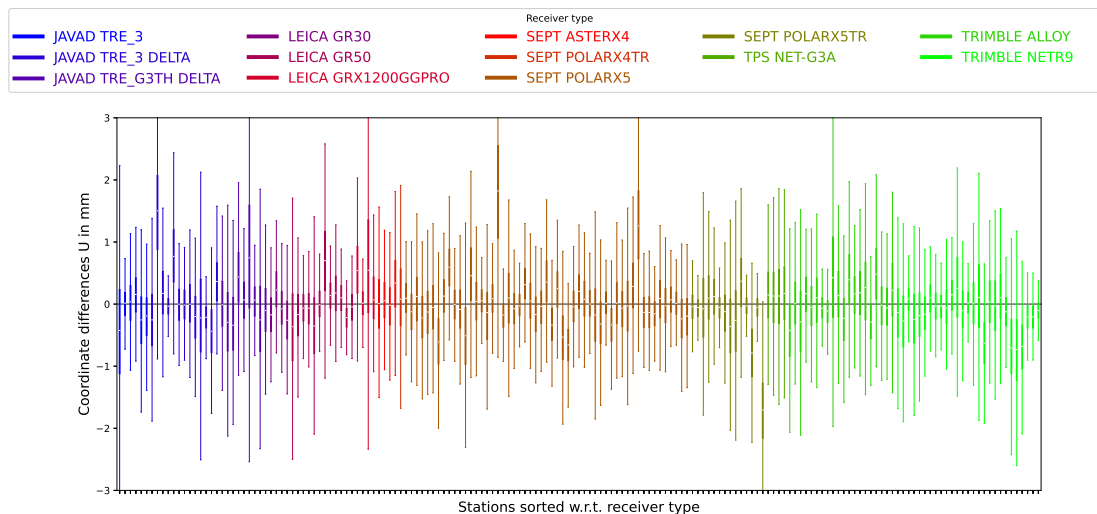

**Figure 5:** Coordinate differences between the solution series with one daily intersystem bias and independent receiver clock estimation per system (histogram of the up component; station sorted according to the receiver types).

the need for the additional parameters to separate the receiver clock corrections. As an example for the comparison of solutions from the two solution series may serve the station coordinates – as one of the key elements of the IGS products. The datum definition was done with minimum constraint solutions applying no-net-rotation and -translation conditions (NNR and NNT) on a verified set of reference frame stations – in fact the same stations per solution series. The coordinate differences of the up component is displayed in Figure 5. The differences in the horizontal components are for most of the stations are below 0.1 mm in some cases up to 0.2 mm. In this sense, the solutions can be seen as identical within the noise level.

In summary, there is no need to reduce the redundancy of the solution by introducing additional parameters in order to obtain independent receiver clock parameters per system and epoch. The approach – implemented in the CODE analysis center processing – to setup constant inter-system biases per day is fully sufficient (of course for GLONASS also the interfrequency biases need to be considered).

## 6 Development on Earth Orientation Parameters products at BKG

### 6.1 Activities on the Multi-Technique Combination of Earth Rotation Parameters

The activities on the multi-technique combination of Earth Rotation Parameters (ERPs) at BKG were continued throughout 2025.

The work is part of the ongoing development of a multi-technique combination strategy at the level of datum-free normal equations (NEQs). The core objective is to improve the estimation of ERPs through the use of consistent input data from multiple geodetic space techniques, currently GNSS, VLBI, and SLR. This combination ensures a homogeneous reference frame and a consistent set of estimated parameters. The NEQs of seven consecutive days are combined into one NEQ system before the datum constraints are applied, and the parameters, in particular ERPs and station coordinates, are estimated. Repeating this procedure on a daily basis results in a continuous ERP series with a daily resolution and short latency of one day, which is particularly important for the highly variable parameter dUT1.

The methodology and the results of the combination approach, including the integration of SLR observations, are described in previous reports and publications ([Lengert et al., 2021, 2022](#); [Klemm et al., 2024a,a](#)).

During the reporting period of 2025, no major methodological changes were introduced. Instead, the existing processing strategy and operational workflow were further maintained and continued. The activities focused on the routine generation, monitoring, and validation of the combined ERP series as well as on the ongoing assessment of the stability and consistency of the multi-technique combination. Further details and updated analyses will be presented in [Klemm et al. \(2026\)](#).

### 6.2 ERP Prediction Using GNSS Products from the CODE Analysis Center

Accurate prediction of Earth Rotation Parameters (ERP), particularly polar motion and Length of Day (LOD), is essential for real-time applications such as satellite orbit determination, GNSS positioning, precise navigation, and Earth system monitoring ([Śliwińska-Bronowicz et al., 2024](#)). Among the space geodetic techniques, GNSS provides highly stable and continuous observations of polar motion and LOD with dense temporal sampling and low operational latency. In particular, the CODE Analysis Center delivers high-quality daily ERP solutions derived solely from GNSS observations using the Bernese GNSS Software. The CODE rapid products are available with a latency of approximately 1–2 days, making them especially suitable for operational short-term ERP prediction ([Modiri et al., 2024](#)).

During the last year, the ERP prediction activities at BKG have evolved substantially from the earlier SSA+Copula-based framework toward a broader operational and physics-informed prediction system focused mainly on polar motion and LOD prediction. The latest developments integrate CODE GNSS rapid products together with IERS C04, BKG SLR, and the new BKG Combined Rapid EOP series within a unified prediction framework (Modiri et al., 2026). The updated system now supports operational prediction experiments for PMx, PMy, and LOD using both single-technique and multi-technique geodetic solutions.

A major methodological advancement is the transition from the purely data-driven SSA+Copula model toward a physics-informed LS+AR+EAM@GFZ approach. In this framework, Effective Angular Momentum (EAM) forecasts from GFZ are incorporated as physical forcing through the Liouville equations, while the remaining geodetic-geophysical residuals are modeled using harmonic least-squares estimation and autoregressive prediction. The approach combines deterministic geophysical excitation modeling with stochastic residual forecasting and has been evaluated operationally using rolling daily prediction experiments for 1–10 day prediction horizons (Modiri et al., 2026).

The latest published experiments demonstrate that the incorporation of GFZ EAM forecasts significantly improves the prediction skill compared to the earlier SSA+Copula baseline, particularly for polar motion and LOD prediction. The LS+AR+EAM@GFZ framework produces systematically lower MAE and WRMS values for PMx and PMy, especially beyond prediction horizons of 3–5 days. The results indicate that the inclusion of geophysical excitation information helps constrain medium-range forecast error growth and improves the overall stability of polar motion prediction.

For LOD prediction, previous CODE GNSS-based experiments using the SSA+Copula framework already demonstrated the high potential of CODE rapid products as low-latency input data (Modiri et al., 2020). In the latest published study, the physics-

**Table 8:** Current status and ongoing developments related to CODE GNSS-based ERP prediction activities at BKG.

Component	Current operational status	Latest development	Next planned step
Polar Motion (PMx/PMy) & LOD	CODE GNSS rapid products used as low-latency ERP input series. SSA+Copula prediction successfully implemented	Physics-informed LS+AR+EAM@GFZ successfully validated using IERS C04 and combined EOP series	Implement LS+AR+EAM@GFZ directly for CODE GNSS polar motion prediction and LOD. Integration of geophysically informed AI/ML approaches.

informed LS+AR+EAM@GFZ framework was evaluated primarily using IERS C04 and combined EOP input series, where the results showed substantial improvements over the SSA+Copula baseline (Modiri et al., 2026). After removing the conventional IERS zonal tidal model, a strong correlation ( $>0.8$ ) was identified between residual LOD and the axial component of GFZ EAM forecasts, confirming the dominant role of geophysical excitation in short-term LOD variability. The reported results demonstrate that the physics-informed approach is capable of maintaining very low prediction errors over 1–10 day horizons and achieves performance comparable to, or better than, leading contributions reported within the Second Earth Orientation Parameters Prediction Comparison Campaign (EOP-PCC). A summary of the current status, recent developments, and planned next steps for CODE GNSS-based ERP prediction activities at BKG is provided in Table 8.

These encouraging results provide the basis for the next development step at BKG, implementing and validating the LS+AR+EAM@GFZ framework directly for CODE GNSS-derived polar motion and LOD time series. The latest developments confirm that CODE GNSS-derived ERP products remain a fundamental resource for operational polar motion and LOD prediction at BKG due to their low latency, high temporal resolution, and internal consistency. Current ongoing developments focus on extending the physics-informed framework toward CODE-specific operational prediction and integrating geophysically informed machine-learning methods, including hybrid neural-network architectures and AI-supported prediction systems, to further improve the robustness and accuracy of ultra-short-term and short-term ERP prediction.

## References

- Dach, R., S. Lutz, P. Walser, and P. Fridez, editors. *Bernese GNSS Software, Version 5.2*. Astronomical Institute, University of Bern, Bern, Switzerland, November 2015. ISBN 978-3-906813-05-9. doi: 10.7892/boris.72297. URL <ftp://ftp.aiub.unibe.ch/BERN52/DOCU/DOCU52.pdf>. User manual.
- Dach, R., S. Schaer, S. Lutz, D. Arnold, H. Bock, E. Orliac, L. Prange, A. Villiger, L. Mervart, A. Jäggi, G. Beutler, E. Brockmann, D. Ineichen, A. Wiget, D. Thaller, H. Habrich, W. Söhne, J. Ihde, P. Steigenberger, and U. Hugentobler. CODE Analysis center: IGS Technical Report 2014. In Y. Jean and R. Dach, editors, *International GNSS Service: Technical Report 2014*, pages 21–34. IGS Central Bureau, May 2015. doi: 10.7892/boris.80306.
- Dach, R., S. Schaer, S. Lutz, M. Meindl, and G. Beutler. Combining the Observations from Different GNSS. In Proceedings *EUREF 2010 Symposium*, Gävle, Sweden, June 02-05, 2010.
- Dach, R., S. Schaer, D. Arnold, E. Brockmann, M. Kalarus, M. Lasser, P. Stebler, A. Jäggi, A. Villiger, D. Ineichen, L. Prange, S. Lutz, D. Thaller, L. Klemm, S. Modiri, A. Rüülke,

- W. Söhne, J. Bouman, U. Hugentobler, and B. Duan. CODE Analysis center: IGS Technical Report 2024. In R. Dach and E. Brockmann, editors, *International GNSS Service: Technical Report 2024*, pages 53–78. IGS Central Bureau, May 2025. doi: 10.48620/88697.
- Klemm, L., D. Thaller, C. Flohrer, A. Kehm, S. Bachmann, S. Modiri, G. Engelhardt, M. Goltz, S. Schade, D. König. Earth Rotation Parameter Products at BKG: From Different Single-Technique Solutions to a Unified Multi-Technique Approach. In: *International Association of Geodesy Symposia*. Springer, Berlin, Heidelberg, 2026. (in review).
- Klemm L., D. Thaller, C. Flohrer, A. Walenta, D. Ullrich, H. Hellmers. Intra-Technique Combination of VLBI Intensives and Rapid Data to Improve the Temporal Regularity and Continuity of the UT1-UTC Series. To appear in: *Proceedings of the IAG International Symposium*. Springer, Berlin, Heidelberg, 2024a. [https://doi.org/10.1007/1345\\_2023\\_235](https://doi.org/10.1007/1345_2023_235)
- Klemm L., D. Thaller, C. Flohrer, A. Walenta, D. Ullrich, H. Hellmers. Consistently Combined Earth Orientation Parameters at BKG – Extended by new VLBI Intensives Data. To appear in: *Proceedings of the 28<sup>th</sup> General Assembly of the International Union of Geodesy and Geophysics (IUGG2023)* in Berlin, Germany, 2024b.
- Lengert L., D. Thaller, C. Flohrer, H. Hellmers, A. Girdiuk. Combination of GNSS and VLBI data for consistent estimation of Earth Rotation Parameters. *Proceedings of the 25<sup>th</sup> European VLBI Group for Geodesy and Astrometry Working Meeting (EVGA 2021)*. (eds. R. Haas). ISBN: 978-91-88041-41-8, 2021. URL: [https://www.oso.chalmers.se/evga/25\\_EVGA\\_2021\\_Cyberspace.pdf](https://www.oso.chalmers.se/evga/25_EVGA_2021_Cyberspace.pdf).
- Lengert L., D. Thaller, C. Flohrer, H. Hellmers, A. Girdiuk. On the improvement of combined EOP series by adding 24-hour VLBI sessions to VLBI Intensives and GNSS data. *Proceedings of the 2021 IAG Symposium, Beijing, China*, in print, 2022. *Proceedings of the IAG International Symposia*. Vol. 154, 2022. [https://doi.org/10.1007/1345\\_2022\\_175](https://doi.org/10.1007/1345_2022_175)
- Modiri, S., S. Belda, M. Hoseini, R. Heinkelmann, J.M. Ferrándiz, H. Schuh. A new hybrid method to improve the ultra-short-term prediction of LOD. *Journal of Geodesy*, 94(2), 23, 2020. <https://doi.org/10.1007/s00190-020-01354-y>
- Modiri, S., D. Thaller, S. Belda, D. Halilovic, L. Klemm, D. König, H. Hellmers, S. Bachmann, C. Flohrer, A. Walenta. EOP prediction based on multi and single technique space geodetic solution. In *Proceedings of the International Association of Geodesy Symposia* (pp. 1–11). Springer Berlin Heidelberg, 2024. [https://doi.org/10.1007/1345\\_2024\\_251](https://doi.org/10.1007/1345_2024_251)
- Modiri, S., D. Thaller, L. Klemm, S. Belda, S. Guessoum, A. Kehm, D. König, C. Flohrer. Operational and Research Developments in Short-Term EOP Prediction at BKG.

International Association of Geodesy Symposia. Springer, Berlin, Heidelberg, 2026. [https://doi.org/10.1007/1345\\_2026\\_324](https://doi.org/10.1007/1345_2026_324)

Śliwińska-Bronowicz, J., T. Kur, M. Wińska, et al. Assessment of length-of-day and universal time predictions based on the results of the Second Earth Orientation Parameters Prediction Comparison Campaign. *Journal of Geodesy*, 98, 22, 2024). <https://doi.org/10.1007/s00190-024-01824-7>

All publications, posters, and presentations of the *Satellite Geodesy* research group at AIUB are available at <http://www.bernese.unibe.ch/publist>.



# ESA/ESOC IGS Analysis Centre Technical Report 2025

V. Mayer<sup>2</sup>, T. Springer<sup>5</sup>, M. van Kints<sup>3</sup>,  
B. Traiser<sup>2</sup>, I. Romero<sup>4</sup>, Iván Sermanoukian Molina<sup>3</sup>,  
F. Gini<sup>1</sup>, F. Zimmermann<sup>1</sup>, E. Schönemann<sup>1</sup>, the ESA/ESOC IGS team

<sup>1</sup> European Space Operations Centre, Darmstadt, Germany

<sup>2</sup> SSC Space GmbH, Darmstadt, Germany

<sup>3</sup> VisionSpace Technologies, Darmstadt, Germany

<sup>4</sup> Canary Space Consulting, Bristol, UK

<sup>5</sup> PosiTim, Seeheim-Jugenheim, Germany

## 1 Introduction

The IGS Analysis Center (AC) operated by the Navigation Support Office of the European Space Agency (ESA) is located at the European Space Operations Center (ESOC) in Darmstadt, Germany. Since joining the IGS at its establishment in 1992, the ESA/ESOC Analysis Centre (ESA AC) has played an integral role in its activities. This report provides an overview of key initiatives and contributions of the IGS Analysis Centre at ESOC. This includes routine generation of high-precision GNSS products, provision of GNSS ground station data, and its key roles in IGS committees and projects.

In 2025, the ESA AC adopted a new processing system, which significantly improved computational robustness, efficiency, and product quality (see Section 2.2), also in support of the upcoming GENESIS mission (see Section 5).

## 2 ESA IGS Contributions

### 2.1 Routine Products

The ESA AC GNSS product contribution to the IGS community:

- **Final:** GPS, Galileo, GLONASS, BeiDou, QZSS; daily; available within 4 days; 24h solutions with 200 stations and 110 satellites; includes Orbits, Clocks (30s),

SINEX, ERPs, Troposphere; *NEW*: Long-term Differential Code Bias (DCB) (19 signal combinations) since 2017.

- **Rapid:** GPS, GLONASS; daily for previous day; available within 2h; 24h solutions with 150 stations and 55 satellites; includes Orbits, Clocks, ERPs, Troposphere.
- **Ultra-Rapid:** GPS, GLONASS; 4 times/day; available within 3h; 48h interval (24h estimated + 24h predicted); includes Orbits, Clocks (30s), SINEX, ERPs, Troposphere.
- **Global Ionosphere Maps:** GPS, GLONASS, Galileo, BeiDou, QZSS (final only); Final maps available within 4 days with 2h step-size. Rapid within 10h with 1 or 2 hours step-size
- **GNSS Sensor Stations:** Ten globally distributed EGON stations; Multi-GNSS, RINEX with 30s, real-time data with 1s sampling.

A general overview of all the different ESA GNSS products may be found at:

[http://navigation-office.esa.int/GNSS\\_based\\_products.html](http://navigation-office.esa.int/GNSS_based_products.html)

An up to date description of the ESA IGS Analysis strategy may always be found at:

<http://navigation-office.esa.int/products/gnss-products/esa.acn>

## 2.2 Product Changes

The Navigation Support Office has developed a novel GNSS processing concept called CHAMP, which stands for Consolidated High Accuracy Multi-GNSS Processing (Gini, 2024b). Based on constellation-wise data processing and normal equation stacking, the method is used to efficiently generate GNSS products for all five global navigation systems (GPS, Galileo, GLONASS, BeiDou, QZSS). A modular design allows the different projects within the Navigation Support Office to combine the necessary constellation results, leading to substantial savings in CPU power and storage requirements. On February 3rd, 2025, ESA started to generate its AC contribution with CHAMP operationally. The changes most relevant to the users are summarized in Table 1.

## 2.3 Product Highlights

The ESA AC delivers comprehensive and high-quality products. A consistent set of GNSS orbit and clock products allows for multi-GNSS precise point positioning, with final clock products sampled at 30-second intervals to support this application.

A distinctive feature of ESA products is their basis on completely independent 24-hour solutions. While this approach does not necessarily yield the smoothest results – since real-world orbits and Earth Orientation Parameters (EOPs) are continuous – it offers

	<b>2024</b>	<b>2025 (CHAMP)</b>
<b>Processing concept</b>	Combined processing of all constellations	Constellation-wise processing + NEQ stacking
<b>Constellations and Frequency Combinations</b>	GPS (L1W-L2W) Galileo (E1C-E5Q) GLONASS (L1P-L2P)	GPS (L1W-L2W) Galileo (E1C-E5Q) GLONASS (L1P-L2P) BeiDou-3 (L1P-L5P) QZSS (L1L-L5Q)
<b>Number of used stations</b>	150	200
<b>Ground antenna calibration required for used signals</b>	No	Yes
<b>Transmitter Antenna Calibrations</b>	igs20.atx	esa23.atx <a href="#">[IGSMail-8394]</a>
<b>Zero-mean P1C1 correction based on</b>	CODE.BIA	ESA0OPSFIN_DCB.BIA
<b>UTC clock alignment</b>	No	Yes

**Table 1: Comparison of ESA AC Final solution: 2024 vs. 2025 (CHAMP)**

significant scientific value by eliminating aliasing and smoothing between consecutive solutions. Another advantage is timeliness: ESA rapid products are typically available already within two hours after the end of the observation day.

ESA products are based on a box-wing model for GNSS satellites to account for solar radiation pressure, Earth albedo, and infrared effects. These block-type-specific models are regularly validated and refined, particularly for new satellites, which often include undocumented features that can significantly influence radiation pressure.

With the introduction of CHAMP, ESA has further enhanced product quality and consistency. By including BeiDou and QZSS in its IGS FINAL contribution, the ESA AC could demonstrate its capability to process multi-constellation solutions. Satellite and station clock products are now aligned to UTC via the UTC(ESOC) realisation, enabled by incorporating ground stations connected to ESOC timing facilities equipped with hydrogen masers.

The ESA AC has decided to adopt manufacturer-provided Phase Center Offset (PCO) calibrations for Galileo and GPS Block III satellites via `esa23.atx`, replacing `igs20.atx`. This is done to avoid inconsistencies in the processing. Furthermore, ESA now uses its own in-house DCB estimates for the P1C1 correction instead of the CODE values. The

calibration differences introduce a scale offset and increase the RMS of station clocks, while the DCB differences raise the RMS of GPS satellite clocks. However, the standard deviation of the clocks, widely regarded as the more meaningful metric, remains very low. Both changes have been reviewed and approved by the IGS combination centers.

In 2025, ESOC introduced the Bias SINEX product `ESA00PSFIN_DCB.BIA`, which defines a stable Bias Reference Frame (BREF) by providing long-term Differential Signal Bias (DSB) estimates for all signals from Galileo, GPS, BeiDou, and QZSS. ESA follows the PCO correction convention outlined in [IGSMail-8113](#). Nineteen unique signal combinations are estimated daily – four for Galileo, five for GPS, five for BeiDou, and five for QZSS. Similar to the terrestrial reference frame generation, daily solutions are stacked, and discontinuities are introduced to account for jumps. BREF generation is implemented as a CHAMP subsystem and is based on the AC Final solution. The product is publicly available at the [ESA Navigation Support Office website](#) and is updated whenever bias values change or new satellites begin broadcasting. The ultimate goal is to enable full interoperability across all signals.

### 3 Governing Board and Committees


- Dr. Erik Schönemann is the Chairman of the GNSS Monitoring Pilot Project.
- Dr. Francesco Gini is the Chairman of the RINEX-RTCM committee to ensure format standardization to meet the needs of the IGS and of the the GNSS industry.

### 4 GNSS Sensor Station Network Upgrade

ESA/ESOC continues to provide worldwide data for all GNSS constellations to the IGS via 10 of its 11 public stations. ESA's GNSS Observation Network (EGON) currently consist of 25 stations and will be further expanded.

Since 2023, EGON operates exclusively **Septentrio PolarRx5** receivers with the latest firmware installed (2025) to enable tracking of all GNSS global and regional satellite constellation signals (such as NavIC L1, QZSS C/B, etc.). The receivers are paired at all locations with **Septentrio PolaNt Choke Ring B3E6** antennas, except for MGUE, MAL2, MAS1 and FAA1, where **Leica AR25.R4** antennas are installed.

The ESOC GNSS Reference Station network operates Septentrio PolaRx5TR timing receivers at all 3 ESA Deep Space sites (CEBR, MGUE, and NNOR), where high quality H-masers are available for signal generation. Additionally, PolaRx5TR are also installed at 4 other ESA tracking locations (KIRU, KOUR, REDU, SNTM), which together make up the core of EGON. In addition, a PolaRx5TR timing receiver is operated at station ESOC in Darmstadt, for which data is now also publicly available, using the UTC(ESOC)

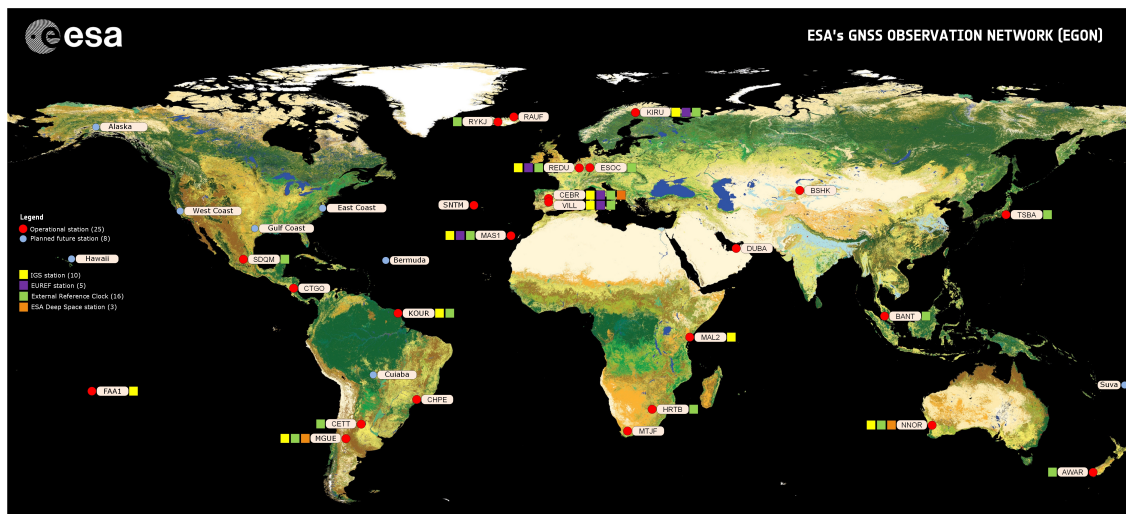

**Figure 1:** ESA/ESOC GNSS Station Network [[http://navigation-office.esa.int/ESA's\\_GNSS\\_Observation\\_Network\\_\(EGON\).html](http://navigation-office.esa.int/ESA's_GNSS_Observation_Network_(EGON).html)]

realisation already mentioned above.

ESA/ESOC continues to contribute a full complement of RINEX 4 data – after migrating from RINEX 3 in mid-2025 – covering all signals and all satellites in view in daily, hourly and high-rate modes to the IGS from 10 of its public stations: VILL, CEBR, FAA1, KIRU, KOUR, MAS1, MAL2, NNOR, REDU and MGUE.

Additionally, in the next few years worldwide coverage is planned to be further enhanced.

## 5 GENESIS

The ESA Precise Navigation System (EPNS) can process data from the four space geodetic techniques, and the Navigation Support Office routinely computes and contributes products to the IGS, ILRS and IDS services of the IAG. In addition, the Navigation Support Office is currently an Associated AC for VLBI (IVS). To ensure that the software is fully prepared for GENESIS, activities to combine the observation of these four different techniques in one single solution were re-initiated. The activities focus on the GNSS and SLR data of the routine IGS and ILRS targets and include Sentinel-6A as a proxy for the upcoming GENESIS mission. The current results are already promising; however, substantial work still lies ahead. In addition to addressing shortcomings in the current solutions, DORIS and VLBI data will be included, and local site ties of stations that collocate multiple geodetic techniques will be incorporated. The current status was presented at the 2025 IAG Scientific Assembly ([Sermanoukian, 2025](#)).

## 6 Summary

Engagement in the IGS community remains a key priority for ESA. This is reflected in how the targets of the *IGS 2021+ Strategic Planning* align with ESA's contributions and technical developments.

By including BeiDou and QZSS in the IGS FINAL products, the ESA AC is supporting **IGS Goal 1: *Multi-GNSS Technical Excellence***. In addition, the new ESA0OPSFIN DCB product, which includes 19 signal combinations, makes the various GNSS signals more accessible to the community.

ESA's success in GNSS is built on close collaboration among researchers, scientists, navigation engineers, and operators, ensuring that operational products benefit from new concepts and methods in a timely manner. The ESA AC also works closely with other ESA experts, such as the GNSS Science Support Centre (GSSC), and GNSS specialists worldwide on a daily basis. ESA actively participates in IGS working groups and committees to improve exchange formats (e.g., RINEX-RTCM) and to strengthen links with system providers (e.g., IGMA). These activities support **IGS Goal 2: *Outreach and Engagement***.

In line with **IGS Goal 3: *Sustainability and Resilience***, the ESA AC has invested in infrastructure, personnel development and redundancy to ensure reliable operations and future growth. Minimising external dependencies is a key focus. Robustness was a central requirement in the development of CHAMP, which now includes improved logic to distinguish between healthy and faulty input data and automated anomaly detection.

After major successes in improving interoperability among individual GNSS systems, the next challenge is enhancing interoperability between GNSS and the other three Space Geodesy techniques. The ESA AC has started prioritising this effort to prepare for the upcoming ESA GENESIS mission.

## References

Francesco Gini, Volker Mayer, Birgit Traiser, Tim Springer, Florian Dilßner, Iván Sermanoukian Molina, Erik Schönemann, Werner Enderle, *ESA's New Operational GNSS Processing Approach for Precise IGS Products*, Presented at IGS Workshop 2024, July 1-5, Berne, Switzerland. Available at: <https://igs.org/workshop/2024/>

Erik Schönemann, *Analysis of GNSS raw observations in PPP solutions*, Master Thesis, April, 2014, Faculty of Geodesie, TU Darmstadt, Darmstadt, Germany. ISBN 978-3-935631-31-0 Available at: [https://tuprints.ulb.tu-darmstadt.de/3843/7/Schoenemann\\_Dissertation\\_TUD.pdf](https://tuprints.ulb.tu-darmstadt.de/3843/7/Schoenemann_Dissertation_TUD.pdf)

Tim Springer, Rene Zandbergen, Alberto Águeda Maté, NAPEOS Mathematical Mod-

els and Algorithms, *DOPS-SYS-TN-0100-OPS-GN*, Issue 1.0, Nov 2009, Available at:  
<http://navigation-office.esa.int/Publications.html>

Iván Sermanoukian, Francesco Gini, Tim Springer, Michiel Otten, Florian Dilssner, Volker Mayer, Birgit Traiser, Sara Bruni, Jean-Christophe Berton, Frank Zimmermann, Werner Enderle, Sara Gidlund, Erik Schoenemann ESA's efforts towards a Combination on the Observation Level (COOL), Submitted for the proceedings of the IAG Scientific Assembly 2025



# GFZ Analysis Center

## Technical Report 2025

B. Männel, Z. Deng, A. Brack, T. Nischan, A. Brandt,  
M. Bradke, M. Ramatschi

GFZ Helmholtz Centre for Geosciences  
Department 1: Geodesy, Section 1.1: Space Geodetic Techniques  
Telegrafenberg A 17, 14473 Potsdam, Germany  
E-mail: [benjamin.maennel@gfz.de](mailto:benjamin.maennel@gfz.de)

### 1 Summary

During 2025, the standard IGS product generation was continued with minor changes in the processing software EPOS.P8. The GNSS observation modeling follows the repro3 (3rd IGS Reprocessing campaign) settings. Operational products cover GPS, GLONASS, and Galileo. The multi-GNSS processing was continued routinely during 2025 including GPS, GLONASS, BeiDou, Galileo, and QZSS.

### 2 Products

The list of products provided to the IGS by GFZ is summarized in Table 1. The long naming scheme was introduced for the IGS products in week 2238.

### 3 Operational Data Processing and Latest Changes

The EPOS.P8 processing software is following the IERS Conventions 2010 [Petit and Luzum \(2010\)](#) and the repro3 standards, changes in the processing lines are reported in Table 2. Operational processing lines cover approximately 140, 120, and 70 sites for IGS final, rapid and ultra-rapid chains, respectively. Since 2020 the ultra-rapid, rapid, and final products are available via GFZ Information System and Data Center (ISDC, <https://isdc.gfz-potsdam.de/gnss-products/>) and referenced under DOIs:

**Table 1:** List of products provided by GFZ AC to IGS and MGEX; YD = YYYYDDD0000. The long naming scheme was introduced for the IGS products in week 2238.

<b>IGS Final</b> (GLONASS since week 1579, Galileo since week 2238)	
GFZ0OPSFN_YD_01D_05M_ORB.SP3	Daily orbits for GPS/GLONASS satellites
GFZ0OPSFN_YD_01D_30S_CLK.CLK	Clocks for stations (5min) and satellites (30sec)
GFZ0OPSFN_YD_01D_01D_SOL.SNX	Daily SINEX files
GFZ0OPSFN_YD_07D_01D_ERP.ERP	Earth rotation parameters
GFZ0OPSFN_YD_07D_07D_DSC.SUM	Summary file including Inter-Frequency Code Biases (IFB) for GLONASS
GFZ0OPSFN_YD_01D_01H_TRO.TRO	Troposphere estimates (1h ZPD, 24h gradients)
GFZ0OPSFN_YD_01D_02H_ION.IOX	Ionosphere product, IONEX format
<b>IGS Rapid</b> (GLONASS since week 1579, Galileo since week 2159)	
GFZ0OPSRAP_YD_01D_05M_ORB.SP3	Daily orbits for GPS, GLONASS, Galileo satellites
GFZ0OPSRAP_YD_01D_30S_CLK.CLK	Clocks for stations (5min) and satellites (30sec)
GFZ0OPSRAP_YD_01D_01D_ERP.ERP	Daily Earth rotation parameters
GFZ0OPSRAP_YD_01D_01D_DSC.SUM	Summary file
GFZ0OPSRAP_YD_01D_02H_ION.IOX	Ionosphere product, IONEX format
<b>IGS Ultra-Rapid</b> (every 3 hours; provided to IGS every 6 hours; GLONASS since week 1603, Galileo since week 2159, YDH = YYYYDDDDHH00)	
GFZ0OPSULT_YDH_02D_05M_ORB.SP3	Adjusted and predicted orbits for GPS, GLONASS, Galileo satellites
GFZ0OPSULT_YDH_02D_01D_ERP.ERP	Earth rotation parameters
GFZ0OPSULT_YDH_01D_01D_DSC.SUM	Summary file
<b>MGEX Rapid</b> containing GPS, GLONASS, Galileo, BeiDou, and QZSS	
GBM0MGXRAP_YD_01D_05M_ORB.SP3	Daily satellite orbits
GBM0MGXRAP_YD_01D_30S_CLK.CLK	Clocks for stations (5min) and satellites (30sec)
GBM0MGXRAP_YD_01D_01D_ERP.ERP	Daily Earth rotation parameters
GBM0MGXRAP_YD_01D_01D_OSB.BIA	Bias file: observable-specific signal bias
GBM0MGXRAP_YD_01D_01D_DCB.BSX	Bias file: differential code and inter-system biases
GBM0MGXRAP_YD_01D_01D_SOL.SNX	Daily SINEX file
GBM0MGXRAP_YD_01D_30S_ATT.OBX	Attitude quaternions (30sec)

- Männel, B., Brandt, A., Nischan, T., Brack, A., Sakic, P., Bradke, M. (2020): GFZ final product series for the International GNSS Service (IGS). GFZ Data Services. <https://doi.org/10.5880/GFZ.1.1.2020.002>

- Männel, B., Brandt, A., Nischan, T., Brack, A., Sakic, P., Bradke, M. (2020): GFZ rapid product series for the International GNSS Service (IGS). GFZ Data Services. <https://doi.org/10.5880/GFZ.1.1.2020.003>
- Männel, B., Brandt, A., Nischan, T., Brack, A., Sakic, P., Bradke, M. (2020): GFZ ultra-rapid product series for the International GNSS Service (IGS). GFZ Data Services. <https://doi.org/10.5880/GFZ.1.1.2020.004>


**Table 2:** Recent processing changes

Date	IGS	IGR	IGU	Change
2025-01-09	w2347	w2348.4	w2347.3:12	administrative name change of GFZ to <i>GFZ Helmholtz Centre for Geosciences</i> reflected in products
2025-01-20	w2348	w2350.2	w2350.1:12	an inconsistency in LC checks during preprocessing was fixed
2025-02-03	w2351	w2352.2	w2352.1:09	switch to igs20_2350.atx
2025-02-05	w2351	w2352.4	w2352.3:15	incorrect COMARP values for E16 and E23 have been fixed
2025-03-04	w2356	w2356.3	w2356.2:18	switch to igs20_2356.atx
2025-03-20	w2358	w2358.5	w2358.4:12	switch from ITRF IGS20 to IGB20
2025-04-03	w2360	w2360.5	w2360.4:12	switch to igs20_2360.atx
2025-06-25	w2372	w2372.4	w2372.3:18	switch to igs20_2370.atx
2025-07-24	w2375	w2376.5	w2376.4:12	switch to igs20_2375.atx
2025-08-13	w2379	w2379.4	w2379.3:12	switch from igrf13 to igrf14

## 4 Multi-GNSS Data Processing

In 2025, the rapid multi-GNSS analysis product GFZMGX was routinely generated. The solution comprised observations from five GNSS constellations, including GPS, GLONASS, Galileo, BeiDou-2/3, and QZSS, with about 140 IGS ground stations and approximately 130 satellites processed (Fig. 1). Since GPS week 2352, the GFZMGX rapid product GFZ0MGXRAP has been provided in the IGB2020 reference frame. Furthermore, taking into account station data availability and global distribution, a minor optimization of the ground station network applied in the GFZMGX processing was activated at 2025/133. All GFZ MGEX products are available at CDDIS, IGS, and GFZ servers. The address of the GFZ server is <ftp://ftp.gfz.de/GNSS/products/mgnss/>.

- Deng, Z., Nischan, T., Bradke, M. (2017): Multi-GNSS Rapid Orbit-, Clock- & EOP-Product Series. <https://doi.org/10.5880/GFZ.1.1.2017.002>

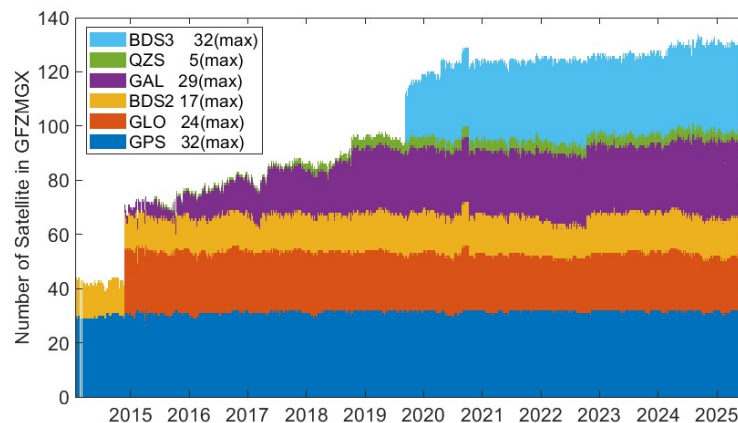

**Figure 1:** Total number of satellite per GNSS included in the daily multi-GNSS data processing (GBM).

## 5 Real-time Products

Over the past years, GFZ has been developing a new real-time GNSS network processing software, which has been operationally used for the IGS Real-Time Service since October 2025. The new GPS, GLONASS, and Galileo orbit and clock solutions are provided with an update rate of five seconds, referring both to the satellite antenna phase centers as well as the centers of mass, respectively. The satellite orbits are fixed to the predicted part of the latest GFZ IGS ultra-rapid solution. The satellite clocks are estimated per epoch from real-time observation data of a global network of around 65 IGS tracking stations in a recursive least-squares adjustment using a sequential-scalar Kalman filter implementation. The new solution is provided via the mount points [SSRA01GFZ\\*](#) and [SSRC01GFZ\\*](#). More details are available at:

- Brack, A.; He, S.; Wickert, J. (2026): Multi-GNSS real-time precise clock estimation at GFZ: Introduction and evaluation of new data product. International Association of Geodesy Symposia, *to be published*

## 6 Multi-GNSS Orbit and Clock Combination

As announced at Jan 24, 2025, SPOCC is now available for external usage. Further details are given at <https://gnss.gfz.de/services/spocc>. With the publication of the software we contribute to Goal 1 and 3 of the IGS 2021+ Strategic Plan. SPOCC can handle all available constellations and is based on a well-defined framework, using variance component estimation (VCE) to determine the weights. The combination can be configured for different weighting schemes, ranging from AC specific to satellite type or

even satellite specific weights, and the alignments can be based on different sets of satellite orbits (Zajdel et al., 2025).

## 7 Operational Ionosphere Products

The rapid and final global ionosphere map (GIM) products were continued in 2025 without changes. Global VTEC maps with a temporal resolution of two hours are computed from GPS, GLONASS, and Galileo observation data from around 250 IGS tracking stations. The final solutions contain the middle day of a combination of three consecutive daily solutions on the normal equation level. The processing is based on a rigorous least-squares approach using uncombined code and phase observations, and does not entail leveling techniques. A single-layer ionospheric model with a spherical harmonic VTEC representation is applied. The products are provided via <https://isdg.gfz-potsdam.de/gnss-products> as daily IONEX files following the IGS long-name definition. The products are referenced under the DOI:

- Brack, A.; Männel, B.; Bradke, M.; Brandt, A.; Nischan, T. (2021): GFZ Global Ionosphere Maps. GFZ Data Services. <https://doi.org/10.5880/GFZ.1.1.2021.006>

## 8 Clock Modeling

In 2025, the EPOS.P8 processing software was enhanced with new capabilities for clock estimation. In addition to the traditional epoch-wise clock solutions, the software now supports piece-wise linear clock modeling for satellite and receiver clocks. This approach has been implemented and successfully tested for several clock types, including the rubidium clocks onboard GPS IIF and IIIA satellites, the passive hydrogen maser clocks of the Galileo FOC satellites, and more than 50 highly stable hydrogen maser stations within the IGS network. The primary benefit of introducing clock models is the significant reduction in the number of estimated clock parameters. By constraining the behavior of the clocks through a piece-wise linear model, parameter correlations are reduced, leading to, e.g., more stable sub-daily height estimates.

- Widczisk, J; Männel, B; Wickert, J (2026): Investigations into highly stable GNSS ground and space clocks using a network of globally distributed H-maser stations. GPS Solutions, 30:21. <https://doi.org/10.1007/s10291-025-01986-7>

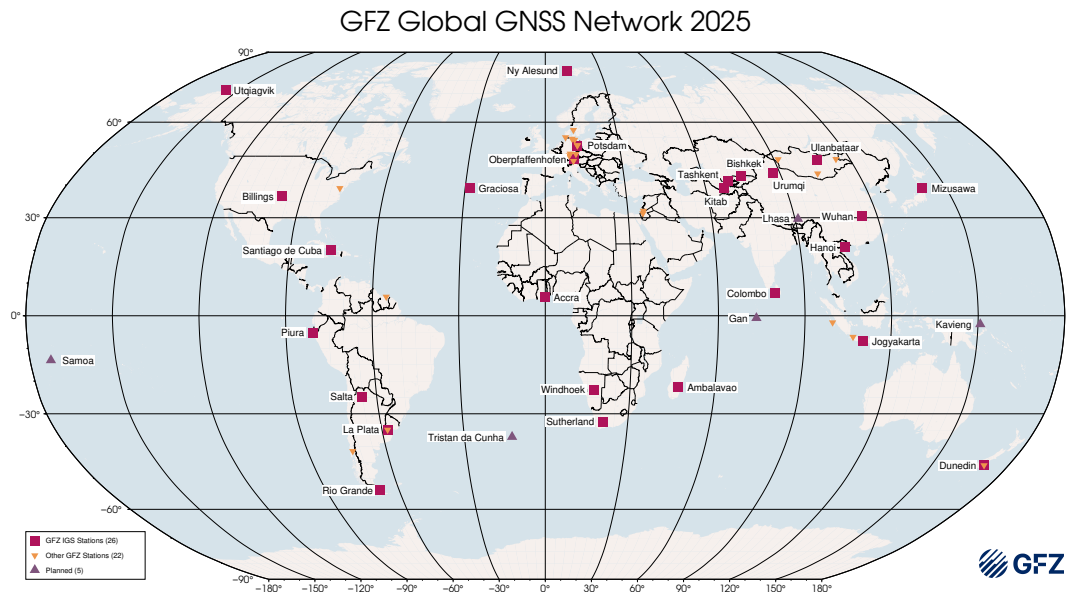


Figure 2: GNSS stations operated by GFZ (as of January 2026).

## 9 Operational GFZ Stations

The global GNSS station network operated by GFZ performed quite well in 2025 without major issues and without major hardware changes. Regular firmware updates have been performed to keep the existing receivers up to date. During 2025, our GNSS in Hanoi (HUMG, Viet Nam) and Piura (PIUR, Peru) became additional IGS sites. In total 25 sites operated by GFZ contribute their data to the IGS network with 1 Hz /15 minute data files and 1 Hz data stream. Our GNSS station network is referenced under the DOI:

- Ramatschi, M; Bradke, M; Nischan, T; Männel, B (2019): GNSS data of the global GFZ tracking network. V. 1. GFZ Data Services. <http://doi.org/10.5880/GFZ.1.1.2020.001>

## References

- Petit, G. and Luzum, B. (eds.) (2010). *IERS Conventions (2010)*. IERS Technical Note No. 36, Verlag des Bundesamtes für Kartographie und Geodäsie, Frankfurt am Main, Germany.
- Zajdel, R., Mansur, G., Sakić, P., Rebischung, P., Brack, A., Männel, B., and Douša, J. (2025). Advancing multi-GNSS orbit combination in the variance component estimation framework. *Journal of Geodesy*, 99, 90. doi:10.1007/s00190-025-02005-w.

# CNES-CLS Analysis Center

## Technical Report 2025

S. Loyer<sup>2</sup>, G. Katsigianni<sup>2</sup>, A. Baños Garcia<sup>2</sup>, A. Mezerette<sup>2</sup>,  
E. Saquet<sup>2</sup>, A. Naouri<sup>2,4</sup>, A. Santamaria Gomez<sup>1,3</sup>, F. Perosanz<sup>1</sup>,  
F. Mercier<sup>1,3</sup>, A. Couhert<sup>1,3</sup>, J. C. Marty<sup>1,3</sup>

<sup>1</sup> Centre National d'Etudes Spatiales, 18 av. Edouard Belin  
31400 Toulouse, France

<sup>2</sup> Collecte Localisation Satellite, 8-10 rue Hermès  
31520 Ramonville St-Agne, France

<sup>3</sup> Geoscience Environnement Toulouse, 14 av. Edouard Belin  
31400 Toulouse, France

<sup>4</sup> CELAD, 48 Route de Lavaur,  
31130 Balma, France

E-Mail: [igs-ac@groupcls.com](mailto:igs-ac@groupcls.com) / Web: <https://igsac-cnes.cls.fr>

## 1 Introduction

The CNES-CLS Analysis Center is providing openly available final, rapid and ultra-rapid products (according to the Goals 1 and 2 of the IGS 2021+ Strategic Plan (IGS Central Bureau, 2021)) on behalf of the “Groupe de Recherches de Géodésie Spatiale” (GRGS) using the GINS CNES software package.

The year 2025 was focused on enhancing the quality of all our products; the rapid and ultra-rapid, the final and the MGEX solutions (now incorporating the BeiDou constellation alongside GPS, GLONASS and Galileo). Significant efforts have also been dedicated to refining the processing of satellite attitude data for all four constellations covered by our products. In addition, we have begun computing code measurements for signals not used in our main processing but required by certain users. These improvements are planned for deployment in our products in the near future.

The formal “GRG” products can be downloaded from the IGS data centers directory: [gps/products/www](https://products/www). Any additional information and links to the CNES-CLS AC publications can be found at <https://igsac-cnes.cls.fr/>.

The list of all the GRG products delivered is given in Table 1 (for more information refer to: <https://igs.org/products/>). The main evolutions during the last two years are summarized in Table 2.

**Table 1:** GRGS publicly available products

File	Type	Sampling
GRG final products GPS, GLONASS & Galileo (since week 2238) Updated weekly		
GRGOOPSFIN_YYYYDDD0000_01D_05M_ORB.SP3	Satellite orbits	5 min
GRGOOPSFIN_YYYYDDD0000_01D_01D_OSB.BIA	Observable specific biases	1/day
GRGOOPSFIN_YYYYDDD0000_01D_01D_SOL.SNX	SINEX files	1/day
GRGOOPSFIN_YYYYDDD0000_01D_02H_TRO.TRO	Tropospheric estimation	2 hr
GRGOOPSFIN_YYYYDDD0000_01D_30S_ATT.OBX	Satellite attitude	30 sec
GRGOOPSFIN_YYYYDDD0000_01D_30S_CLK.CLK	Satellite & station clocks	30 sec
GRGOOPSFIN_YYYYDDD0000_07D_01D_ERP.ERP	Earth rotation parameters	1/day
GRGOOPSFIN_YYYYDDD0000_07D_01D_SUM.SUM	Summary file	
MGEX products: GPS, GLONASS, Galileo & BeiDou (since week 2288) Updated weekly		
GRGOMGXFIN_YYYYDDD0000_01D_05M_ORB.SP3	Satellite orbits	5 min
GRGOMGXFIN_YYYYDDD0000_01D_01D_OSB.BIA	Observable specific biases	1/day
GRGOMGXFIN_YYYYDDD0000_01D_30S_ATT.OBX	Satellite attitude	30 sec
GRGOMGXFIN_YYYYDDD0000_01D_30S_CLK.CLK	Satellite & station clocks	30 sec
GRGOMGXFIN_YYYYDDD0000_07D_01D_ERP.ERP	Earth rotation parameters	1/day
Rapid products GPS, Galileo & BeiDou (since week 2238) Updated daily		
GRGOOPSRAP_YYYYDDD0000_01D_05M_ORB.SP3	Satellite orbits	5 min
GRGOOPSRAP_YYYYDDD0000_01D_01D_OSB.BIA	Observable specific biases	1/day
GRGOOPSRAP_YYYYDDD0000_01D_30S_ATT.OBX	Satellite attitude	30 sec
GRGOOPSRAP_YYYYDDD0000_01D_30S_CLK.CLK	Satellite & station clocks	30 sec
GRGOOPSRAP_YYYYDDD0000_01D_01D_ERP.ERP	Earth rotation parameters	1/day
GRGOOPSRAP_YYYYDDD0000_01D_01D_SUM.SUM	Summary file	
Ultra-rapid products GPS, Galileo & BeiDou (since week 2238) Updated four times a day		
GRGOOPSULT_YYYYDDD0000_02D_05M_ORB.SP3	Satellite orbits	5 min
GRGOOPSULT_YYYYDDD0000_01D_30S_ATT.OBX	Satellite attitude	5 min
GRGOOPSULT_YYYYDDD0000_02D_30S_CLK.CLK	Satellite & station clocks	5 min
GRGOOPSULT_YYYYDDD0000_02D_01D_ERP.ERP	Earth rotation parameters	every 6 h
GRGOOPSULT_YYYYDDD0000_02D_02D_SUM.SUM	Summary file	

The formal “GRG” products can be downloaded from the IGS data centers directory: [gps/products/www](https://gps/products/www). Any additional information and links to the AC publications can be found at <https://igsac-cnes.cls.fr/>.

The list of all the GRG products delivered is given in Table 1 (for more information refer to: <https://igs.org/products/>). The main evolutions during the last two years are summarized in Table 2.

**Table 2:** Main CNES-CLS AC evolutions in 2024 and 2025

Date	GPS week	Change
04/03/2024	2304	Change of the gravity field model from RL04 to RL05 (without degree 1)
	2310	Addition of 24h prediction for the ultra-rapid products
02/06/2024	2317	Change to format 2.00 for the GRG00PSFIN_YD_01D_02H_TRO.TRO files
14/07/2024	2323	Inclusion of midnight epochs in the SP3/CLK/OBX final and MGX products
22/12/2024	2340	Change from frequencies 26 to frequencies 15 for BeiDou constellation in MGX products
02/02/2025	2352	Change to IGb20 reference frame

## 2 Rapid and Ultra-rapid products

Since May 2023, we have been providing rapid and ultra-rapid products for the GPS, Galileo, and BeiDou constellations with fixed phase ambiguities. These products contribute to the IGR and IGU combined products of the IGS (<https://acc.igs.org>) as well as to the BAR pilot project combined products (<https://igs.org/wg/bias-and-ambiguity-resolution/>), formerly associated with the PPP-AR working group (<https://igs.org/wg/ppp-ar>).

## 3 Final & MGEX products

Aside from the common transition to the IGb20 reference frame (see [IGSMail #8543](#)), no changes were introduced to our products this year. Their quality remains high and stable over time, as illustrated in Figure 1.

In 2025, we continued our participation in the evaluation campaign of BDS-3 phase center offset (PCO) estimates. The results indicate that the estimated values are stable and coherent with those from the other ACs participating in the campaign.



**Figure 1:** Sinex combination weight (top) and Orbit WRMS (bottom) with respect to IGS final solutions for the AC contributions, as computed by the IGS/ACC (GRG contribution highlighted in yellow). The corresponding plots are available via the IGS Plotter at <https://igsac-cnes.cls.fr/html/links.html>

As decided by the ACs, the new BeiDou antenna PCO values will be applied to our MGEX products starting from GPS week 2405.

## 4 Improvements in satellite attitude modeling

Significant changes have been implemented in the modelling of satellite attitudes for the GREC constellations. The applied mathematical models have been refined and corrected.

In addition, for the auxiliary attitude yaw law of the Galileo FOC satellites, we introduced an additional computation step to compensate for the attitude differences that occur when using different epoch intervals; for example 300 sec and 30 sec, as is the case for ORBEX files (Figure 2). A linear interpolation procedure has been incorporated to more precisely determine the entry time of the satellite in the collinearity region (and therefore


the auxiliary law). In addition to the attitude law given by EUSPA, we introduced the equation 1:

$$t_{ref} = t_0 + (10^\circ - \epsilon_0) \frac{t_1 - t_0}{\epsilon_1 - \epsilon_0} \quad (1)$$

Where  $t_0$  is referring to the “previous epoch” for time and collinearity angle and  $t_1$  is referring to the current epoch after the entry to the collinearity region. The term  $t_{ref}$  is the exact time of entry to the auxiliary law where  $\epsilon = 10^\circ$ . We apply the auxiliary law, not at the last epoch ( $t_0$ ) of nominal law but the time exactly when the transition happens ( $t_{ref}$ ), i.e. when the collinearity angle is exactly  $10^\circ$ .

This additional step optimized the transition to the auxiliary yaw law and demonstrated improvements in the overall orbit and clock overlap comparisons.


All these aforementioned corrections and additions will be incorporated into our Final, MGEX, Rapid and Ultra-rapid products in the near future.

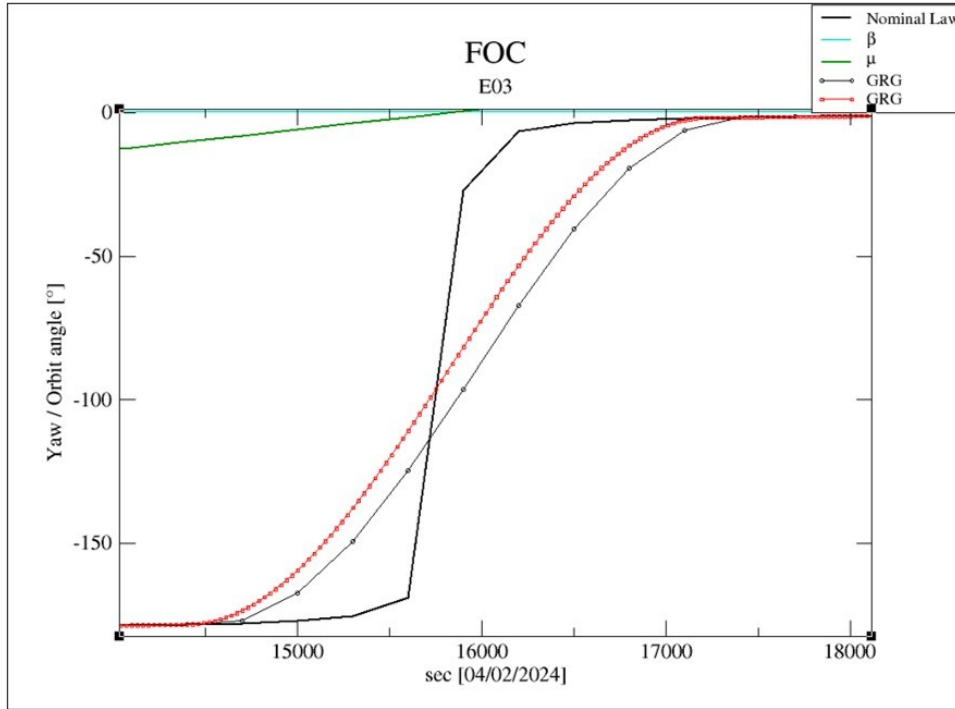

**Figure 2:** An example of FOC E33 satellite in eclipse season, showing the difference in yaw angle values when using 300sec step (in black) and 30sec step (in red) as calculated by GRG AC.

## 5 Other studies in progress

In 2025, the CNES-CLS Analysis Center also initiated the development of a processing chain for the generation of ionospheric products, including global Total Electron Content (TEC) maps. The processing scheme relies exclusively on GNSS measurements and estimates the global ionospheric parameters through a least squares adjustment combined with a spherical harmonics representation of the Vertical TEC (VTEC) field. The objective is to deliver IGS compliant ionospheric products and to contribute to the improvement of the IGS global combined ionosphere solution (e.g. Figure 3).

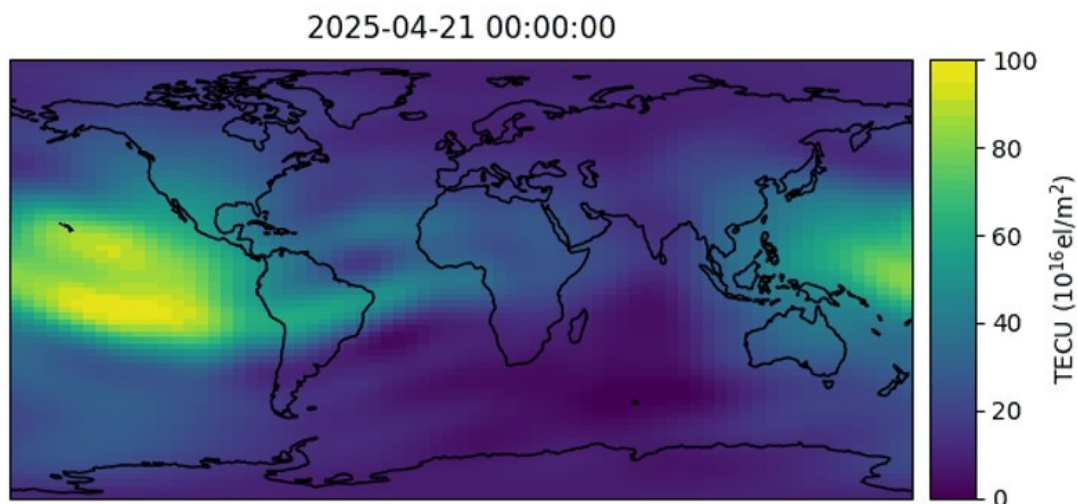


**Figure 3:** Example of an ionospheric map computed by the CNES CLS Analysis Center.

In parallel, we are developing new procedures for the estimation of Observable Specific Biases (OSB). The GRG OSB products currently distributed are limited to the signals used in our final and MGEX processing chains. However, some users require additional signals compatible with our orbit and clock estimates. To address this need, we currently employ four methods to derive these OSBs:

1. **Use of ionospheric maps**, adapted for the code biases between signals of different frequencies. This approach can be applied either during the ionospheric map generation process or by using external maps.
2. **Combination of phase and code measurements**, such as the wide lane (Melbourne-Wübbena) combination.
3. **Ionosphere free combinations**, for example, between code clocks and phase clocks.
4. **Direct differences of raw observations**, applicable to signals on the same fre-

quency. This method can be used to track code biases (directly) and phase biases (in the form of fractional biases). In both code and phase cases, a network processing is required to separate the satellite and the receiver contributions.

An example of the biases difference C2W-C2L derived using the fourth method is shown in Figure 4.

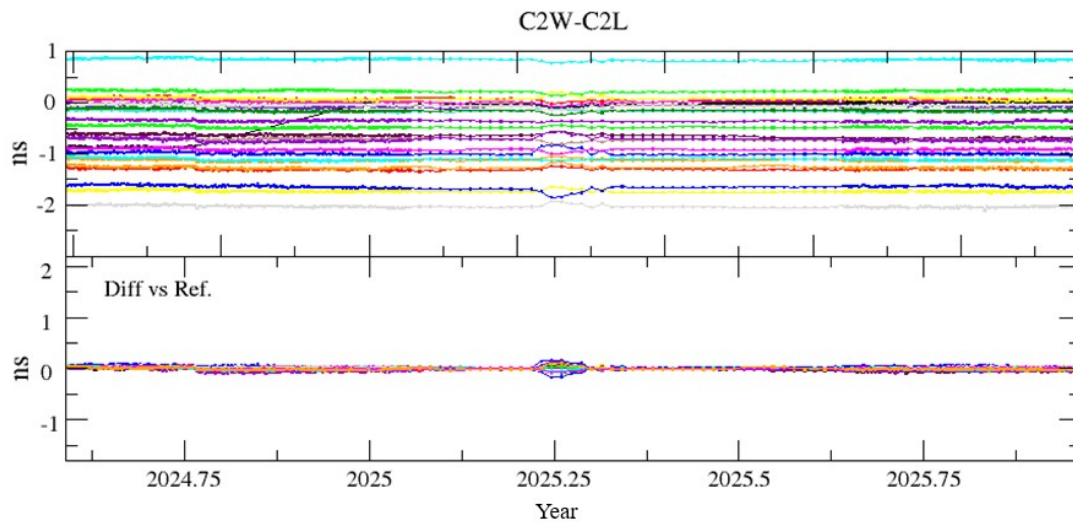

**Figure 4:** Top graph: C2L-C2W biases of GPS satellites. Bottom graph: Differences relative to the mean values (one curve per GPS satellite).

## 6 References

CLS Exploitation de localisation géodésique et du service utilisateur IDS, Rapport semestriel de juin 2025, CLS-ENVP-NT-25-0121, 2025a

CLS Exploitation de localisation géodésique et du service utilisateur IDS, Rapport semestriel de décembre 2025, CLS-ENVP-NT-25-0267, 2025b

EUSPA Galileo Satellite Metadata, <https://www.gsc-europa.eu/support-to-developers/galileo-satellite-metadata#3>

IGS, International GNSS Service 2021+ Strategic Plan, [https://files.igs.org/pub/resource/pubs/IGS\\_Strategic\\_Plan\\_2021\\_Final.pdf](https://files.igs.org/pub/resource/pubs/IGS_Strategic_Plan_2021_Final.pdf), 2021

IGS, Precise Point Positioning with Ambiguity Resolution, 2025

IGS, IGS Analysis Center Coordinator (ACC), <https://acc.igs.org>, 2019

IGS, Bias and Ambiguity Resolution, <https://igs.org/wg/bias-and-ambiguity-resolution>, 2025

Mezerette, A., S. Loyer, E. Saquet and A. Banos Garcia. CNES/CLS IGS Analysis Center: Rapid & Ultra-rapid Products Overview. IGS Workshop Bern, Poster - 141, 2024

Saquet, E., S. Loyer, A. Mezerette, A. Banos Garcia, G. Katsigianni and A. Naouri. CNES/CLS IGS Analysis Center: recent developments. IGS Workshop Bern, Poster - 128, 2024

# Geospatial Information Authority of Japan (GSI) and Japan Aerospace Exploration Agency (JAXA) Analysis Center Technical Report 2025

K. Akiyama<sup>1</sup>, T. Miyazaki<sup>2</sup>, S. Abe<sup>2</sup>, K. Kawate<sup>1</sup>,  
Y. Igarashi<sup>1</sup>, T. Sasaki<sup>1</sup>, E. Imada<sup>1</sup>, H. Takiguchi<sup>1</sup>, T. Nagano<sup>1</sup>, S. Kogure<sup>1</sup>,  
K. Yoshinaga<sup>2</sup>, M. Yokokawa<sup>2</sup>, B. Miyahara<sup>2</sup>

<sup>1</sup> Japan Aerospace Exploration Agency (JAXA),  
Tsukuba, Japan

<sup>2</sup> Geospatial Information Authority of Japan (GSI),  
Tsukuba, Japan

## 1 Introduction

The Geospatial Information Authority of Japan (GSI) and Japan Aerospace Exploration Agency (JAXA) jointly operate one of the IGS Analysis Centers (ACs) identified by the acronym “JGX” and generate GNSS orbits, clocks, ERPs, and SINEX products. The main processing engine of JGX is MADOCA software (Multi-GNSS Advanced Demonstration tool for Orbit and Clock Analysis), which is developed and maintained by JAXA ([Kawate et al., 2023](#)). JAXA is responsible for maintaining and improving the MADOCA software, while GSI is responsible for the processing of JGX operational products using the software, including quality control. Our contributions to the IGS community are summarized as follows.

Our contributions

1. Provide independent results from other ACs via our original analysis software MADOCA.
2. Provide precise multi-GNSS products, e.g., GPS, GLONASS, Galileo, BDS and

QZSS.

3. Provide more detailed information regarding the POD for QZSS.
4. Provide a stable supply of products through years of experience in product generation.

## 2 JGX Core Products

The JGX products provided by GSI and JAXA to IGS are listed in Table 1. The ultra-rapid product has been provided since 11<sup>th</sup> November 2024; however, it has not yet been included in the IGS ultra-rapid combination.

**Table 1:** List of JGX products provided by GSI and JAXA to IGS.

<b>JGX Final</b> (weekly updates) GPS, GLONASS and Galileo	
JGXOOPSFIN_YYYYDDD0000_01D_05M_ORB.SP3	Daily GPS, GLONASS and Galileo orbits and clocks with 5 min intervals
JGXOOPSFIN_YYYYDDD0000_01D_30S_CLK.CLK	Daily GNSS satellite and station clocks with 30 sec intervals
JGXOOPSFIN_YYYYDDD0000_01D_01D_SOL.SNX	Daily station coordinates and ERPs in SINEX format
JGXOOPSFIN_YYYYDDD0000_01D_01D_ERP.ERP	Daily Earth rotation parameters
JGXOOPSFIN_YYYYDDD0000_01D_07D_DSC.SUM	Analysis summary for each processing
JGXOOPSFIN_YYYYDDD0000_01D_30S_ATT.OBX	Daily satellite attitude in OBX format
<b>JGX Rapid</b> (daily updates) GPS, GLONASS and Galileo	
JGXOOPSRAP_YYYYDDD0000_01D_05M_ORB.SP3	Daily GPS, GLONASS and Galileo orbits and clocks with 5 min intervals
JGXOOPSRAP_YYYYDDD0000_01D_30S_CLK.CLK	Daily GNSS satellite and station clocks with 30 sec intervals
JGXOOPSRAP_YYYYDDD0000_01D_01D_ERP.ERP	Daily Earth rotation parameters
JGXOOPSRAP_YYYYDDD0000_01D_01D_DSC.SUM	Analysis summary for each processing
JGXOOPSRAP_YYYYDDD0000_01D_05M_ATT.OBX	Daily satellite attitude in OBX format
<b>JGX Ultra-Rapid</b> (every 6 hours updates) GPS, GLONASS and Galileo	
JGXOOPSULT_YYYYDDDDHH00_02D_05M_ORB.SP3	Daily GPS, GLONASS and Galileo orbits and clocks with 5 min intervals
JGXOOPSULT_YYYYDDDDHH00_02D_01D_ERP.ERP	Daily Earth rotation parameters
JGXOOPSULT_YYYYDDDDHH00_01D_01D_DSC.SUM	Analysis summary for each processing
JGXOOPSULT_YYYYDDDDHH00_01D_05M_ATT.OBX	Daily satellite attitude in OBX format

Satellite attitude information in ORBEX format (Loyer et al., 2019) has been provided since 22<sup>th</sup> June 2025 for the final, rapid, and ultra-rapid products.

The JGX products are also available at the following URL after completing the registration:

<https://jgxnet.gsi.go.jp/en/top/>

### 3 Software and the Latest Changes

The JGX products are generated using our POD software, MADOCA, which has been developed and continuously updated by JAXA since 2011. MADOCA supports multi-GNSS constellations (GPS, GLONASS, Galileo, BDS, and QZSS) and incorporates force and measurement models compliant with the IERS conventions 2010 (IERS, 2010) and those applied in the IGS Repro3 campaign (IGS, 2019). The products are estimated both in post-processing using iterative weighted least squares and in real-time processing using extended Kalman filter (EKF) employing methods that reduce memory consumption and processing time while improving processing stability. JAXA has introduced new features to enhance performance, with recent efforts focusing on non-gravitational force modeling. Details of the POD algorithm are provided in our paper (Kawate et al., 2023).


The following changes have been implemented in version 2.2.1a, which are currently used for the latest JGX products. This version corrects a bug in which the yaw-steering angles for GPS Block IIR and IIR-M were erroneously inverted by 180 degrees. JGX GPS orbit products incorporating this fix (since GPS week 2372) show improved consistency with IGS combined products. Additionally, regarding the third item below, the first Block III satellite of QZSS, J007 (QZS-6), began service in July 2025 (CAO, 2025). As an Analysis Center for the Multi-GNSS Pilot Project (MGPP), we are preparing to release products for this satellite.

1. Addition of a zonal tide model to mitigate the effects arising from the interpolation of UT1
2. Correction of the yaw-steering model for GPS Block IIR and IIR-M
3. Support for the new QZSS satellite block (Block III)
4. Inclusion of the prediction part of ERPs in the ERP files
5. Addition of constraint information to the SINEX files (to be activated when NNR+NNT constraints are applied)

Furthermore, we are currently implementing and conducting quality assessments of our phase bias products in both the observable-specific signal bias (OSB) and common clock (CC) representation (Schaer et al., 2021). These products are planned for release in 2026.

## 4 Operational Data Processing

The JGX operational final, rapid, and ultra-rapid products are currently generated using MADOCA software version 2.2.1a. The candidate IGS stations used for processing in 2025 are shown in Figure 1. Considering the quality, latency and availability of the daily data from IGS stations, we select approximately 150, 110, and 110 stations for the final, rapid, and ultra-rapid products, respectively. Approximately 50 fiducial sites are chosen for each daily solution to minimize inconsistencies between the Earth's center of mass (CoM) and the center of the network defined by the selected fiducial sites. The IGS20/igs20.atx reference frame is applied with no-net-rotation (NNR) minimum constraints, for the processing.

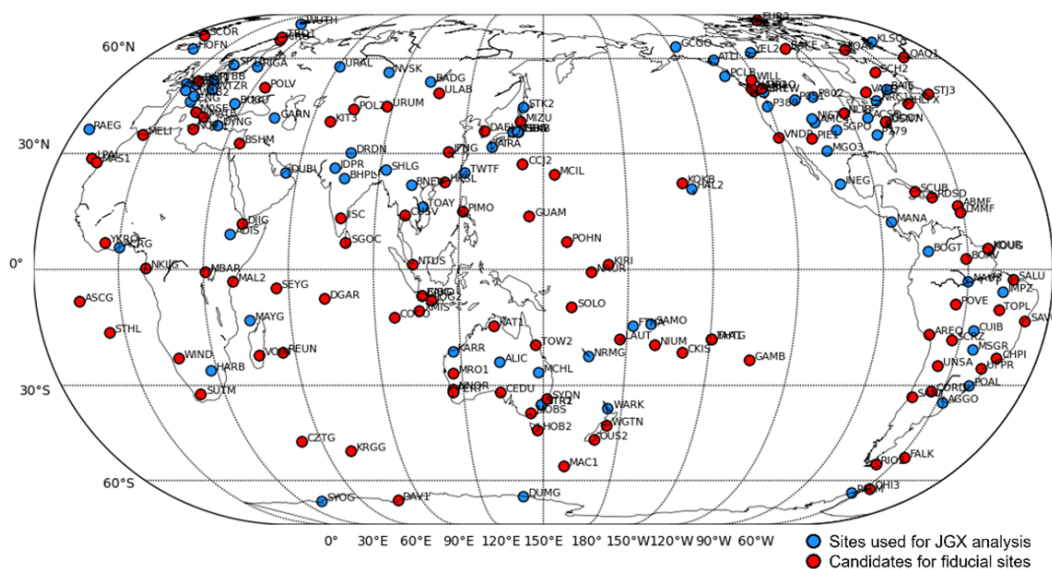


**Figure 1:** Station network for JGX processing in 2025.

The JGX final and rapid products for GPS, GLONASS, and Galileo have been routinely submitted to the IGS since GPS week 2269. The final products (SP3, CLK, SNX, ERP, SUM, OBX) are generated with a latency of five days and uploaded every Thursday. The rapid products (SP3, CLK, ERP, SUM, OBX) are generated with a latency of one day and uploaded on a daily basis. When unexpectedly large errors are detected in the final product, corrective measures are taken as far as possible prior to upload. The processing software was upgraded from version 2.2.0a to 2.2.1a at GPS week 2372. This newer version includes a bug fix on correcting the yaw steering angle for GPS Block IIR and IIR-M, and this update has improved the consistency between the JGX and IGS final products as shown in Figure 2.

The JGX ultra-rapid products (SP3, ERP, SUM, OBX) for GPS, GLONASS, and Galileo

have been routinely submitted to IGS since GPS week 2340. However, they have not yet been incorporated into the IGS combined products due to instability in satellite clock estimation.

Figure 2 shows the 3D RMS of satellite orbit differences among IGS ACs for the final products in 2025. No Helmert transformation has been applied. The quality of the JGX orbits is comparable to that of other ACs.

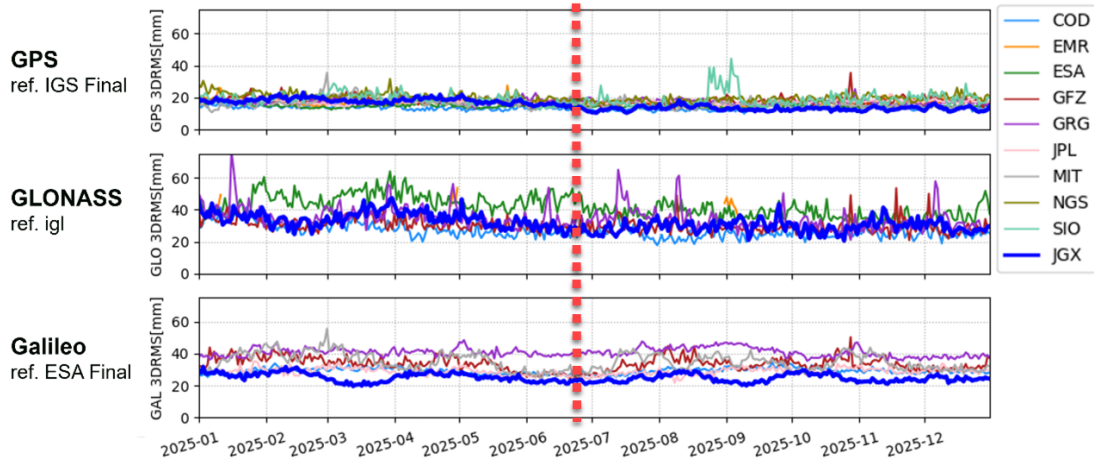

**Figure 2:** 3D RMS errors of the final products in 2025 with respect to the IGS final (GPS, GLONASS) and the ESA final products (Galileo). The red vertical dashed line (22 June) indicates the switch to the updated POD software version that includes the bug fix for the GPS yaw steering model.

The pressing issues for the JGX operational products are as follows.

- Product modification related to the center-of-network:  
To meet the convention requirement for the clock center-of-network (CLK:CoN), we plan to apply not only NNR constraints but also no-net-translation (NNT) constraints to our products. In addition, we plan to update our software to introduce the conversion from the Earth's CoM to the center of network (CoN) by applying the center of mass correction (CMC) for ocean tide loading (OTL) directly to the orbit. With the introduction of the NNR+NNT constraints, our preliminary PPP solutions processed with these modified products clearly showed improved repeatability in the temporal variation, which had been affected by the shift in the Earth's CoM. While the NNT constraint function has already been implemented in the current MADOCA software (version 2.2.1a), the implementation to output the minimum constraint information into SINEX file has not yet been completed. These changes will be applied to JGX operational products once validation by the IGS reference frame coordinator is completed.
- Improvement of the ultra-rapid products:  
The JGX ultra-rapid orbit products are not included in the IGS combination due to


insufficient accuracy in the prediction part of the orbits, and further improvement is required.

- Improvement of stability in the clock products:  
The stability issue was improved after March 2024 as a result of applying the following measures: selecting stable clock-reference sites and performing quality checks on reference clocks. In addition, we plan to introduce a more sophisticated iterative data-quality-control and screening procedure for satellite clock estimation in the future. We will continue to address operational issues as they arise.

## 5 Proposal for the IGS workshop 2028 in Japan

At the IGS governing board meeting in August 2025, it was decided that the JGX team will host the 2028 IGS workshop in Tsukuba, Japan. The 2028 workshop will be the first IGS workshop hold in Japan and will serve as an excellent opportunity to highlight the technological evolution and increasing diversity of the IGS community. The workshop will address key technical themes that are strongly connected to Japan, including multi-GNSS constellations such as QZSS, as well as the contribution of GNSS to disaster risk reduction, particularly in monitoring seismic deformations and crustal movements for geodetic applications. Furthermore, it will provide an opportunity for potential participants—such as university students, young professionals—in Japan and neighboring Asia-Pacific countries to engage with the IGS community.

The venue will be the Tsukuba International Congress Center (<https://www.epochal.or.jp/en/>). The main hall designated for the symposium can accommodate the expected number of IGS participants, with seating for up to 450 people. A dedicated space for the poster session is located adjacent to the main hall and can host up to 100 posters. Additionally, to support a hybrid format for the symposium and workshop, multiple meeting rooms will be available to facilitate concurrent sessions.

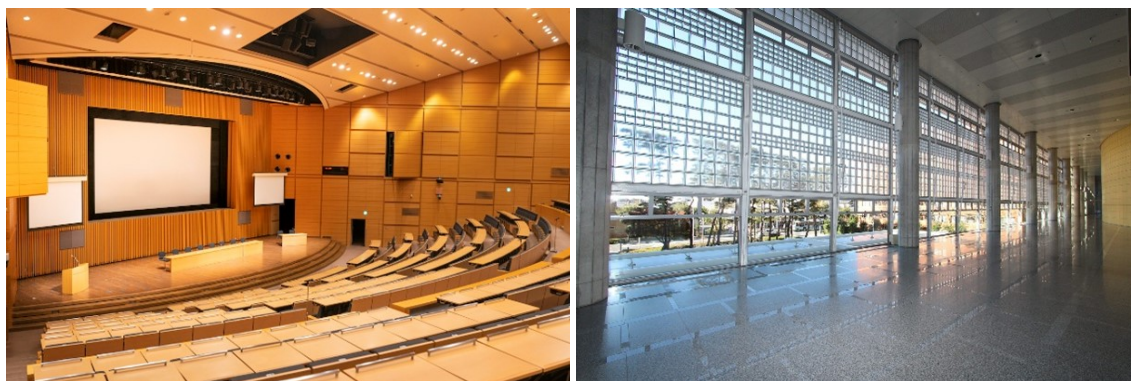

**Figure 3:** Main hall for symposium (left) and Large space for poster session (right).

Important facilities related to geodesy and Japan's space development - such as the Ishioka Geodetic Observing Station and the Tsukuba Space Center—are located near the conference venue. To make the workshop truly rewarding, the JGX team is planning to organize a variety of special events. We hope you look forward to the 2028 IGS Workshop.



**Figure 4:** Ishioka geodetic observing station (left) and Tsukuba space center (right).

## 6 References

- K. Kawate, Y. Igarashi, H. Yamada, K. Akiyama, M. Okeya, H. Takiguchi, M. Murata, T. Sasaki, S. Matsushita, S. Miyoshi, M. Miyoshi, and S. Kogure 2023 MADOCA: Japanese precise orbit and clock determination tool for GNSS. *Advances in Space Research*, 71(10), p.3927-3950. *Surv Geophys*, doi: <https://doi.org/10.1016/j.asr.2023.01.060>.
- S. Loyer, O. Montenbruck, and S. Hilla 2019 ORBEX satellite orbit/attitude format. IERS conventions, 2010, <https://www.iers.org/IERS/EN/DataProducts/Conventions/conventions.html>.
- IGS CONVENTIONS AND MODELLING FOR REPRO3, 2019 <http://acc.igs.org/repro3/repro3.html>.
- CAO, Start of QZS-6 Services, 2025 [https://qzss.go.jp/en/overview/notices/qzs6\\_250718.html](https://qzss.go.jp/en/overview/notices/qzs6_250718.html).
- S. Schaer, A. Villiger, D. Arnold, R. Dach, L. Prange, and A. Jäggi, 2021. The CODE ambiguity-fixed clock and phase bias analysis products: generation, properties, and performance. *Journal of Geodesy*, 95, 81. doi: <https://doi.org/10.1007/s00190-021-01521-9>



# Jet Propulsion Laboratory Analysis Center Technical Report 2025

P. Ries, W. Bertiger, D. Hemberger,  
A. Komanduru, D. Murphy, A. Peidou, A. Sibthorpe

Jet Propulsion Laboratory  
California Institute of Technology  
4800 Oak Grove Drive, M/S 238-600  
Pasadena, CA 91001, U.S.A.  
(paul.a.ries@jpl.nasa.gov, +1-818-393-2637)

## 1 Introduction

In 2025, the Jet Propulsion Laboratory (JPL) continued to serve as an Analysis Center (AC) for the International GNSS Service (IGS). We contributed operational orbit and clock solutions for the GPS satellites; position, clock and troposphere solutions for the ground stations used to determine the satellite orbit and clock states; and estimates of Earth rotation parameters (length-of-day, polar motion, and polar motion rates). This report summarizes the activities at the JPL IGS AC in 2025.

Table 1 summarizes our contributions to the IGS Rapid and Final products. All of our contributions are based upon daily solutions centered at noon and spanning 30 hours. Each of our daily solutions is determined independently from neighboring solutions, namely without applying any constraints between solutions. Before 2024-08-25, we produced

**Table 1:** JPL AC Contributions to IGS Rapid and Final Products.  
(Galileo products available from 2024-08-25 onwards)

Product	Description	Rapid/Final
JPL00PSFIN_YYYYJJJHHMM_01D_05M_ORB.SP3	GPS (+Galileo) orbits and clocks	Rapid & Final
JPL00PSFIN_YYYYJJJHHMM_01D_30S_CLK.CLK	GPS (+Galileo) satellite and station clocks	Rapid & Final
JPL00PSFIN_YYYYJJJHHMM_01D_30S_TRO.TRO	Tropospheric estimates	Rapid & Final
JPL00PSFIN_YYYYJJJHHMM_01D_01D_ERP.ERP	Earth rotation parameters	Rapid & Final
JPL00PSFIN_YYYYJJJHHMM_01D_30S_ATT.OBX	Satellite attitude quaternions	Rapid & Final
JPL00PSFIN_YYYYJJJHHMM_01D_01D_SOL.SNX	Daily SINEX file	Final
JPL00PSFIN_YYYYJJJHHMM_01W_00U_SUM.SUM	Weekly solution summary	Final

GPS-only Rapid and Final orbit and clock products and since that date we have produced GPS+Galileo Rapid and Final orbit and clock products. Note that both high-rate (30-second) Final and Rapid clock products are created.

The JPL IGS AC also generates Ultra-Rapid orbit and clock products for the GPS constellation. These products are generated with a latency of less than 2.5 hours and are updated hourly (Bertiger et al., 2020). Although not submitted to the IGS, our Ultra-Rapid products are available in native GipsyX formats at:

- [https://sideshow.jpl.nasa.gov/pub/JPL\\_GNSS\\_Products/Ultra](https://sideshow.jpl.nasa.gov/pub/JPL_GNSS_Products/Ultra)

## 2 Processing Software and Standards

On 29 Jan 2017 (start of GPS week 1934) we switched from using GIPSY (version 6.4) to GipsyX ((Bertiger et al., 2020)) to create all our orbit and clock products. As of week 2329 (2024-08-24), all IGS Finals were submitted in the IGS20 frame, and furthermore a reprocessing in the IGS20 frame has also been released back through week:day 729:6 (1994-01-01).

The frame for Rapids and Finals was updated updated to IGb20 during week 2352 (2025-02-02).

Our IGS20 Rapid operations and our ongoing Final IGS20 reprocessing campaign continue to use several new models vs IGS14 processing, some from repro3 and some from our own choices:

1. Use of center of mass seasonals for reference site positions.
2. Data weighting based on optimization testing.
3. Troposphere randomwalk parameter optimized based on external (Young et al., 2022) and internal research.
4. VMF1 (Boehm et al., 2006) troposphere models and mapping functions instead of GPT2 for better station positioning (Martens and Simons, 2023).
5. Sub-daily EOP model (Desai and Sibois, 2016).
6. Time varying-gravity model.
7. Antenna thrust models per IGS recommendations.
8. Modern ocean tide loading, using GOT4.8 (Ray, 2013).
9. IGS20 antenna calibrations.

We continue to use empirical GPS solar radiation pressure models developed at JPL instead of the DYB-based strategies that are commonly used by other IGS analysis centers.

This choice is based upon an extensive evaluation of various internal and external metrics after testing both approaches with the GIPSY/OASIS software (Sibthorpe et al., 2011).

### 3 GipsyX Overview

GipsyX has been the sole operational software at the JPL IGS Analysis center, replacing GIPSY-OASIS since January 2017.

GipsyX has the following features:

1. GipsyX is the C++/Python3 replacement for both GIPSY and Real-Time GIPSY (RTG).
2. Driven by need to support both post-processing and real-time processing of multiple GNSS constellations.
3. Can already process data from GPS, GLONASS, Beidou, and Galileo.
4. Supports simultaneous GNSS, SLR, DORIS, and VLBI data processing at the measurement level.
5. Multi-processor and multi-threaded capability.
6. Versatile PPP tool (gd2e).
7. Runs under Linux, Mac OS, post-processing, real-time environments, and embedded flight hardware.
8. GipsyX-1.0 released 2019-01-28.
9. Most recent release was GipsyX-2.5 on 2025-12-29.
10. Available for license, free to academia.

(see <https://gipsy-oasis.jpl.nasa.gov/index.php?page=software> for more details)

Further details can be found in the GipsyX/RTGx paper (Bertiger et al., 2020).

In parallel with the GipsyX development we continued development of Python3 operational software that uses GipsyX to generate the rapid and final products that we deliver to the IGS as well as generating our ultra-rapid products that are available on our https site.

### 4 Recent Activities

- Released a reprocessing campaign in IGS20 from 2002-2024 (Peidou et al. (2023), Ries et al. (2024)) that will go back to 1992 (to be released in 2025).

- Contributed to research into creating an experimental reference frame using combined SLR and GNSS data at the observation level tied together using spacecraft with both GNSS receivers and SLR reflectors which showed good agreement with ITRF2020 (Haines et al., 2024). VLBI was also incorporated using traditional site survey-derived ties.
- Added Doppler Orbitography by Radiopositioning Integrated on Satellite (DORIS) to the experimental reference frame solution (Peidou et al., 2025).
- On 2024-08-25 switched to creating high-rate (30s) GPS+Galileo orbit and clock products in IGS format and delivering these products to IGS data centers.
- Increased ground network used to create Rapid and Final products from 80 stations to 120 stations.
- Gave a GipsyX class at University of Beira Interior, Covilhã, Portugal, Sept 4-6, 2024.
- Continued Multi-GNSS and multi-technique development. Efforts included substantial code refinement, all based around our GipsyX software.

## 5 Future Work

- Continue Multi-GNSS and multi-technique development and operational support incorporating lesson learned from reference frame at the observational level work (Haines et al., 2024).
- Add Beidou MEO to rapid and final products.
- Update empirical solar pressure modes for newer spacecraft (esp. Block III GPS).

## 6 Acknowledgments

The work described in this report was performed at the Jet Propulsion Laboratory, California Institute of Technology under a contract with the National Aeronautics and Space Administration (80NM0018D0004).

©2025 California Institute of Technology. Government sponsorship acknowledged.

## References

Bertiger, W., Y. Bar-Sever, A. Dorsey, B. Haines, N. Harvey, D. Hemberger, M. Heflin, W. Lu, M. Miller, A. W. Moore, D. Murphy, P. Ries, L. Romans, A. Sibois, A. Sibthorpe,

- B. Szilagy, M. Vallisneri, P. Willis (2020), GipsyX/RTGx, a new tool set for space geodetic operations and research, *Advances in Space Research*, Volume 66, Issue 3, 469-489, doi:10.1016/j.asr.2020.04.015
- Boehm, J., B. Werl, and H. Schuh (2006), Troposphere mapping functions for GPS and very long baseline interferometry from European Centre for Medium-Range Weather Forecasts operational analysis data, *J. Geophys. Res.*, 111, B02406, doi:10.1029/2005JB003629.
- Desai, S. D., and A. E. Sibois (2016), Evaluating predicted diurnal and semidiurnal tidal variations in polar motion with GPS-based observations, *J. Geophys. Res. Solid Earth*, 121, 5237-5256, doi:10.1002/2016JB013125.
- Garcia Fernandez, M., S. D. Desai, M. D. Butala, and A. Komjathy (2013), Evaluation of different approaches to modeling the second-order ionosphere delay on GPS measurements, *J. Geophys. Res.*, 118 (12), 7864-7873, doi:10.1002/2013JA019356.
- Haines B., W. Bertiger, S. Desai, M. Ellmer, M. Heflin, D. Kuang, G. Lanyi, C. Naudet, A. Peidou, P. Ries, A. Sibois, X. Wu (2024), A Global Combination of Geodetic Techniques at the Observation Level: New Perspectives on the Terrestrial Reference Frame *J. Geophys. Res. Solid Earth*, 129, doi.org/10.1029/2024JB029527
- Lagler, K., M. Schindelegger, J. Boehm, H. Krasna, and T. Nilsson (2013), GPT2: Empirical slant delay model for radio space geodetic techniques, *Geophys. Res. Lett.*, 40 (6), 1069-1073, doi:10.1002/grl.50288.
- Lyard, F., F. Lefevre, T. Letellier, and O. Francis, Modeling the global ocean tides: Insights from FES2004 (2006), *Ocean Dyn.*, (56), 394-415, doi:10.1007/s10236-006-0086-x.
- H R Martens, M Simons, A comparison of predicted and observed ocean tidal loading in Alaska, *Geophysical Journal International*, Volume 223, Issue 1, October 2020, Pages 454-470, <https://doi.org/10.1093/gji/ggaa323>
- Peidou A, Komanduru A, Ries PA, Bertiger W, Heflin MB, Hemberger D, Moore A, Murphy DW, Sibthorpe A. JPL's IGS20 reprocessing campaign. AGU23. 2023 Dec 13.
- Peidou, A., Haines, B., Bertiger, W., Conrad, A., Desai, S., Murphy, D., Naudet, C., and Ries, P.: Geodetic Technique Combinations at the Observation Level: Advancements in Terrestrial Reference Frame Recovery, EGU General Assembly 2025, Vienna, Austria, 27 Apr–2 May 2025, EGU25-11071, <https://doi.org/10.5194/egusphere-egu25-11071>, 2025.
- Ray, R. D., Precise comparisons of bottom-pressure and altimetric ocean tides (2013), *J. Geophys. Res.*, 118, 4570-4584, doi:10.1002/jgrc.20336.
- Ries, P., W. Bertiger, M. Heflin, D. Hemberger, A. Komanduru. D. Murphy, and A Peidou, Exploring different ITRF2020 seasonals for a reprocessing campaign. 2022 Fall AGU meeting, Chigago Il, December 12-16.

Ries, P., A. Komanduru, A. Peidou, M. Heflin, D. Hemberger, A. Sibthorpe, D. Murphy, Results from the JPL IGS Analysis Center IGS20 Reprocessing Campaign, 2024 Fall AGU meeting, Washington DC, December 9-13.

Sibois, A., C. Selle, S. Desai, A. Sibthorpe, and J. Weiss (2014), An update empirical model for solar radiation pressure forces acting on GPS satellites, 2014 IGS Workshop, Pasadena, CA, June 23-27.

Sibthorpe, A., W. Bertiger, S. D. Desai, B. Haines, N. Harvey, and J. P. Weiss (2011), An evaluation of solar radiation pressure strategies for the GPS constellations, *J. Geodesy*, 85 (8), 505-517, doi:10.1007/s00190-011-0450-6.

Young, Z., Blewitt, G., and Kreemer, C. (2022) Application of Variable Random Walk Process Noise to Improve GPS Tropospheric Path Delay Estimation and Positioning at Local and Global Scales. *AGU Fall Meeting 2022*. G13A-01.

# MIT Analysis Center Technical Report 2025

T. Herring<sup>1</sup>

<sup>1</sup> Massachusetts Institute of Technology, Cambridge, MA, USA  
Room 54-322, 77 Massachusetts Av, Cambridge MA 02816 USA  
E-mail: tah@mit.edu  
Phone: +1 617 253 5941

## 1 Introduction

In this report, we discuss the results generated by the MIT Analysis Center (AC) for submissions of weekly final IGS solutions, as well as our weekly combination of SINEX files from MIT and the other eight IGS analysis centers that submit final SINEX files. We present an analysis of the networks we process and a comparison between our position estimates and those from other IGS analysis centers. For repro3 and our IGS20 submissions, we use combined GPS and Galileo solutions and examine the differences between GPS-only and Galileo-only solutions.

## 2 Overview of MIT Processing

The MIT analysis for IGS final orbits, clocks, and terrestrial reference frame uses the GAMIT/GLOBK software versions 10.71 and 5.34 (Herring *et al.* (2019)). The processing methods remain unchanged from those discussed in the 2022 MIT Analysis Center report (see Dach and Brockmann (2023)).

In addition to weekly final processing, we also generate combined SINEX processing from the combination of up to ten IGS ACs contributing to the IGS finals. We do this in our role as an associate analysis center (AAC). In Tables 1 and 2, we list the products submitted by MIT in our AC and AAC roles. Our operational processing continues to use a combined GPS+Galileo solution, with 5-minute tabular points in the SP3 orbit files to accommodate the high-eccentricity Galileo satellites. The 24:00 epoch has also been added to our orbit and clock files.

The network of stations processed by MIT in 2025 is shown in Figure 1. The figure shows the weighted root-mean-square (WRMS) scatter of the horizontal coordinates of nearly all of the stations included in the MIT finals processing. Stations that were used less than 10 times (14 stations in total) are not included in the plot. Only linear trends were removed from the time series. The median WRMS scatters of the 434 sites, measured more than five times, included in the statistics are 1.54, 1.51 mm in North and East and 5.46 mm in height. No annual signals were removed, nor are scale parameters estimated in the reference frame realization. The station selection criteria remain the same as previous years, except starting week 2360 (2025/03/30), we only include in the Galileo solutions those stations with antennas that have L5 phase calibrations.

The sites with high RMS in Figure 1 show anomalies for a variety of reasons. Table 3 describes what is known about the reasons for the high RMS of each site. Many of the sites with high RMS are IGS sites, but some sites are included in our analyzes to provide geographic coverage.

**Table 1:** MIT products submitted for weekly finals analysis


Long File Name	Description
MITOOPSFIN_YYYYDDS0000_07D_01D_SUM.SUM	Summary file
MITOOPSFIN_YYYYDDS0000_07D_01D_ERP.ERP	Earth rotation parameters for 7 days
MITOOPSFIN_YYYYDDS0000_01D_05M_ORB.SP3	Day 0 satellite orbits
MITOOPSFIN_YYYYDDE0000_01D_05M_ORB.SP3	Day 6 satellite orbits
MITOOPSFIN_YYYYDDS0000_01D_05M_CLK.CLK	Day 0 satellite clocks
MITOOPSFIN_YYYYDDE0000_01D_05M_CLK.CLK	Day 6 satellite clocks
MITOOPSFIN_YYYYDDS0000_01D_01D_SOL.SNX	Day 0 coordinate and EOP SINEX file
MITOOPSFIN_YYYYDDE0000_01D_01D_SOL.SNX	Day 6 coordinate and EOP SINEX file

**Table 2:** MIT products submitted for daily combinations of IGS final AC SINEX files


Long file name	Description
MITOOPSSNX_YYYYDDD0000_01D_01D_SUM.SUM	Summary file
MITOOPSSNX_YYYYDDD0000_01D_01D_SOL.SNX	Combined SINEX file from all available analysis centers
MITOOPSSNX_YYYYDDD0000_01D_01D_RES.SUM	File of the individual AC position estimates residuals to the combined solution for the week

### 3 Position repeatability and comparison to other ACs


We can also compare the MIT daily position estimates with those of other analysis centers based on the AAC combinations performed at MIT. In Figure 2 we show the WRMS scatter

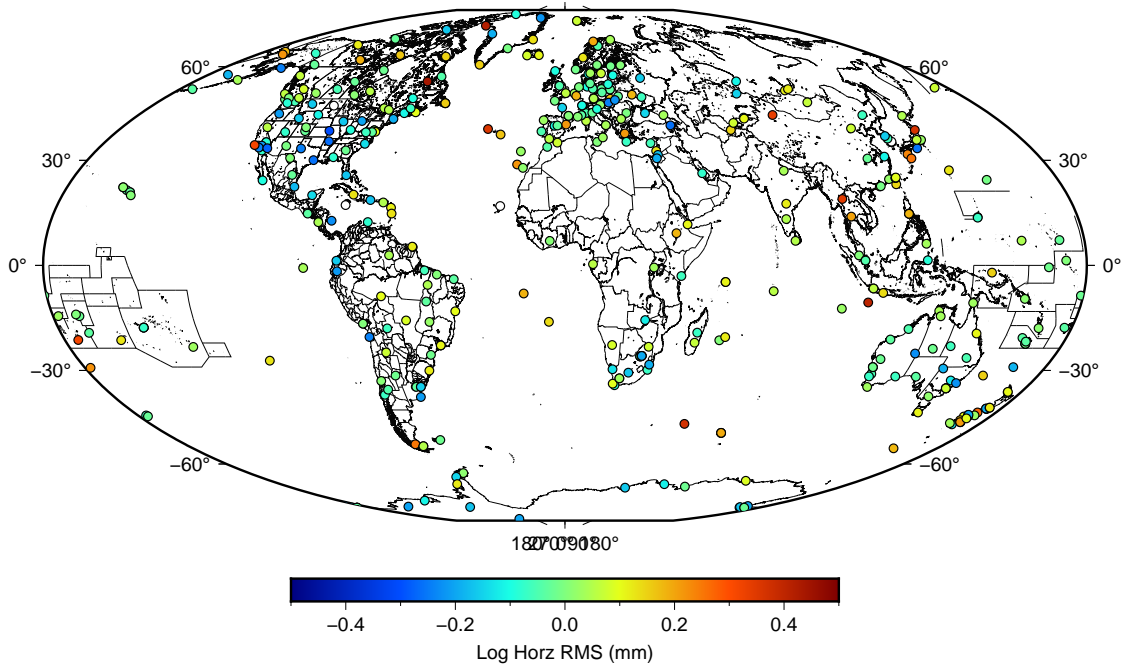

**Figure 1:** Log (base 10) of the WRMS scatter of the horizontal position estimates from the network of 442 stations. A total of 421 sites were processed by MIT in 2025, with 42 sites being used less than 5 times. Each daily network has 350 stations, and the networks evolve with time depending on data availability and geometry. Of the 440 stations, 223 have Galileo data with fully calibrated antennas.

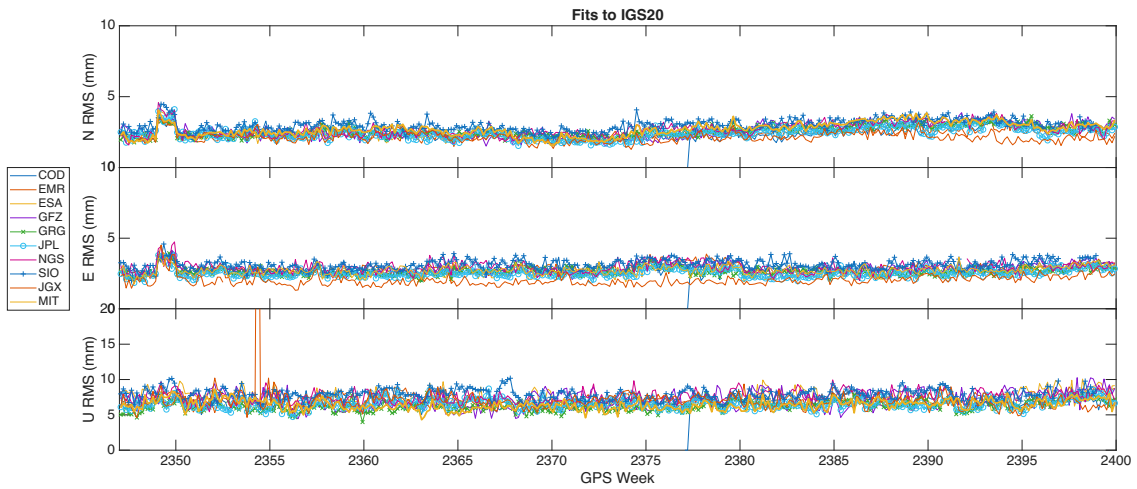

**Figure 2:** WRMS scatters of the fits of different IGS ACs to the IGS20 system using typically 45-50 stations. Note the scales here are twice those used in Figure 3

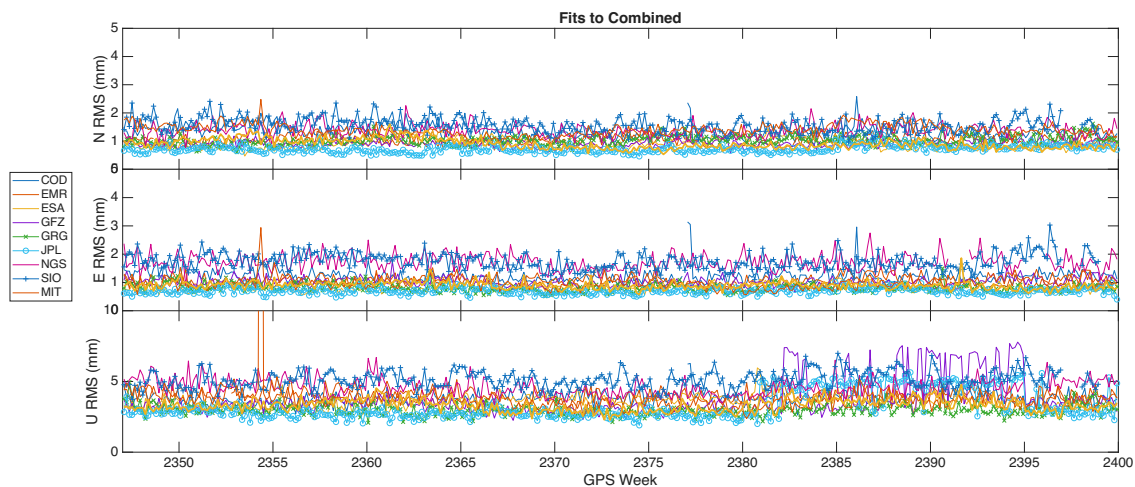

**Figure 3:** WRMS scatters of the fits of the different IGS ACs to the MIT0OPSSNX combined solution for 2025. The larger excursions were mostly due to non-detected outliers.

between the AC solutions and the IGS20 reference frame coordinates (IGb20 realization). While the AC results look similar, there are differences in the mean of the RMS differences. In Figure 3, we show the WRMS scatter of the daily fits to 50 IGS20 reference frame sites from each of the IGS ACs from the combined SINEX solution with the weights assigned to each AC consistent with the fit of the AC to the combination of the other ACs. There is good consistency between the ACs. A summary of the metrics for each AC is given in Table 4. This table gives the mean WRMS differences for each AC with respect to IGS20 coordinates and the combination solution coordinates. This table shows that, on average, the MIT solution provides a very good match to the combined solution with millimeter horizontal WRMS and 3.39 mm WRMS in height. We also compute the chi-squared per degree of the fits, and all ACs have similar chi-squared values, indicating that no one center dominates the combination. Reweighting factors are computed for each center as part of the combination process and so the balance of the chi-squared values is not surprising.

## 4 Comparison between GPS-only, Galileo-only, and combined solutions

The MIT contribution to the final IGS20 orbit and reference frame products is a combination of the GPS and Galileo solutions. We also process each system separately so that we can compare the mean differences between the solutions and the RMS differences of the time series of each system and the combination after removing linear trends. The network of sites used for Galileo processing is formed from the 350 sites used daily for the GPS network and includes all sites with fully calibrated antennas that have Galileo data. Generally, there are about 222 sites in the Galileo network. Of these sites, 211 sites were

**Table 3:** Explanations of high RMS sites

Site	Type	Explanation
CN11	NEU	Monument badly damaged during hurricane on 2025–10–29.
BSMK	NEU	Site in building that appears to be disturbed on 2025–06–17; data flow stops shortly afterwards.
URUM	NEU	IGS site with large annual signal in height, with outliers most likely due to snow.
TONG	NEU	IGS Tonga site with systematic noise and outliers in East seen by all ACs.
CMUM	NEU	IGS site in Thailand with systematic quasi-seasonal noise.
GAMG	N	IGS site in Korea with North offset of $-19$ mm on 2025–11–17, with no earthquake or metadata change in log.
CPVG	NE	IGS site in Cape Verde; non-secular motions possibly due to volcanic activity.
CZTG	NE	IGS site in French Southern and Antarctic Lands; very noisy, possibly due to atmospheric effects.
FLRS	E	IGS site on Ilha das Flores; highly skewed position residuals mostly in East.
SCH2	NEU	Northern Canadian IGS site affected by snow.
HYDE	NEU	Indian IGS site showing a large number of excursions persisting for multiple days; reasons are not obvious.
HORN	U	New Zealand site with an increasing number of outliers.
FLIN	U	Canadian IGS site with strong evidence for persistent snow effects.
INVK	U	Canadian IGS site affected by snow, similar to FLIN.
BOAV	U	Brazilian IGS site strongly affected by hydrologic loads, mostly in U but also N.
POVE	U	Brazilian IGS site affected by hydrology similar to BOAV.

used 10 or more times. There are about 40 other stations that track Galileo data but use antennas with only L1 and L2 phase calibrations.

Table 5 presents the median and 95% quantile WRMS scatter of position residuals in North, East, and Up after removing linear trends only for data collected in 2025 for sites common to all three solution types. It shows that Galileo-only solutions have higher WRMS scatter than GPS-only solutions, while the combined GPS and Galileo solution has the lowest WRMS scatter across all components for both the median and 95% quantile levels. When differences between GPS-only and Galileo-only solutions are analyzed, some sites show systematic mean differences, which affect the realization of the terrestrial reference frame as the IGS shifts from GPS to multi-GNSS solutions.

The differences between the L1/L2 and L1/L5 GPS and Galileo solutions with fully cal-

**Table 4:** Comparison of the fits to the IGS20 reference frame (RF) and daily combined solutions for RF sites in the MIT and other AC daily final SINEX files. Typically, 50 sites are used in the comparison to IGS20.


Center	IGS20			Combined		
	N (mm)	E (mm)	U (mm)	N (mm)	E (mm)	U (mm)
MIT	2.71	2.74	6.42	0.90	0.90	3.29
COD	2.44	2.81	6.85	1.34	1.24	3.83
EMR	2.35	2.87	7.14	1.04	1.07	4.04
ESA	2.54	2.61	7.16	0.91	0.83	3.55
GFZ	2.60	2.79	7.02	0.91	1.02	3.70
GRG	2.58	2.64	6.22	1.02	0.81	2.98
JPL	2.44	2.54	6.60	0.72	0.70	3.25
NGS	2.68	2.92	7.60	1.39	1.72	4.61
SIO	2.99	3.14	7.88	1.57	1.74	5.12
JGX	2.15	2.03	7.02	1.40	0.99	3.85

ibrated antennas indicate that the phase center model to be used at individual sites is likely to depend critically on the in-situ environment in which the antenna is installed. The height differences for the 211 sites are shown in Figure 4 have a median difference of 0.3 mm, but the median WRMS scatter of these differences, 2.21 mm, is far greater than the typical standard deviation of the mean differences of 0.28 mm (although the latter, computed assuming white noise, is too small). Plots of the differences show that, for many sites, there are clear mean differences in height and horizontal coordinates. One specific case which seems to clearly show the impact of the environment of the antenna is for an antenna change at the IGS site JOG200IDN on 2023/10/23. On this day a fully calibrated JAV\_RINGANT\_G3T antenna was replaced with a SEPCHOKE\_B3E6 antenna. Both antennas have E05 calibrations, and no radomes were installed. IGS photos of the site show a pillar mounted on a rooftop. The sloped roofs of other buildings are visible in the photos, but there is no nearby vegetation. Offsets in position are common when antennas are changed, but in this case, the position changes differ significantly between the GPS and Galileo solutions. The North-East differences (based on 30 days of data before and after the change) are  $0.37 \pm 1.01$  and  $19.52 \pm 1.29$  mm for GPS and  $10.77 \pm 1.44$  mm and  $8.55 \pm 1.31$  mm for Galileo, clearly showing a very different response to the antenna change. Other IGS analysis centers process this site as well, with those ACs submitting GPS-only solutions matching our GPS estimates (SIO NE  $0.28 \pm 1.26$ ,  $17.41 \pm 1.50$  mm), while ACs submitting multi-GNSS solutions vary. GFZ shows offsets similar to our combined solution offset (NE  $9.59 \pm 0.70$ ,  $8.53 \pm 1.13$  mm, the MITS combined solution submitted to the IGS shows offsets of NE  $8.72 \pm 0.96$ ,  $11.17 \pm 1.09$  mm), while CODE shows a result closer to GPS (NE  $0.04 \pm 1.22$ ,  $18.44 \pm 1.12$  mm). This latter result may be due to the relative weights assigned to Glonass, Galileo, and GPS in the CODE solution. There

**Table 5:** Median and 95% quantile WRMS scatters of the NEU position estimates from the 211 sites used more than nine times that are common to the GPS, Galileo, and combined solutions in 2025. All units are mm.

Solution	Median			95% quantile		
	N WRMS	E WRMS	U WRMS	N WRMS	E WRMS	U WRMS
GPS	1.67	1.63	5.68	2.67	2.94	9.19
Galileo	1.94	1.87	6.43	3.01	3.17	10.69
Combined	1.52	1.45	5.48	2.56	2.72	8.78

are other recent antenna changes that we are examining, but none of these generate the large horizontal coordinate difference seen at JOG200IDN. We are also starting analysis of short baseline data between close sites that track multi-GNSS signals and that have fully calibrated antennas.

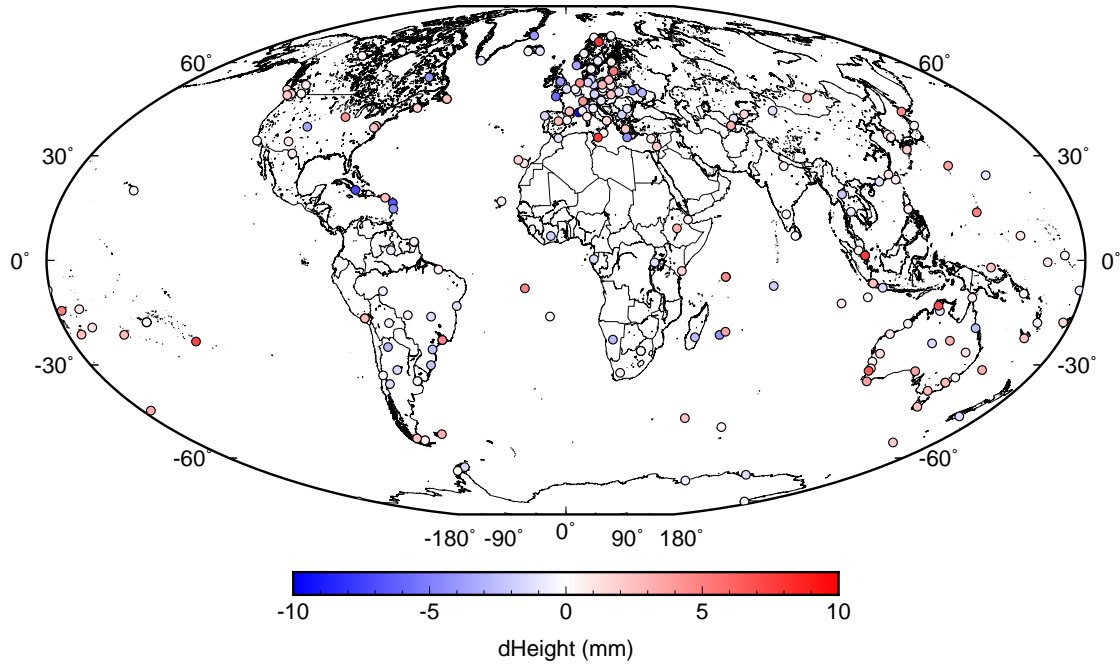

**Figure 4:** Differences between GPS-only and Galileo height estimates for sites that use fully calibrated antennas. For sites with high-quality data, the differences range from  $-9.96 \pm 0.21$  (MARS00FRA) to  $+9.56 \pm 0.23$  (DARW00AUS). There are large horizontal position differences as well. For North differences, the range is  $-2.61 \pm 0.08$  (SG0C00LKA) to  $4.21 \pm 0.06$  (GRAS00FRA), and for East differences, the range is  $-7.64 \pm 0.11$  (URUM00CHN) to  $5.31 \pm 0.11$  (CMUM00THA).

## References

- Herring, T.A., R.W. King, and M.A. Floyd. GAMIT/GLOBK version 10.71. Massachusetts Institute of Technology, 2019 [http://www-gpsg.mit.edu/~simon/gtgk/Intro\\_GG.pdf](http://www-gpsg.mit.edu/~simon/gtgk/Intro_GG.pdf)
- R. Dach and E. Brockmann (eds.) (2023). *International GNSS Service: Technical Report 2022*, IGS Central Bureau and University of Bern; Bern Open Publishing doi: 10.48350/10.48350/179297.

# NGS Analysis Center Technical Report 2025

J. Jones<sup>1</sup>, P. McFarland<sup>1</sup>

<sup>1</sup> National Geodetic Survey,  
1315 East-West Highway, SSMC3  
Silver Spring, MD 20910, USA

## 1 Introduction

In 2025, The National Geodetic Survey (NGS) continued to serve dual roles in the geodetic community as an analysis center and a regional data center for the International GNSS Service (IGS). This report summarizes the routine analysis and data center activities conducted at NGS; the products provided by NGS and their locations; plus the significant changes that occurred since the last contribution to the 2024 IGS Report.

## 2 Core Analysis Center Products

The NGS analysis center currently focuses on modeling the Global Positioning System (GPS) satellite orbits and providing the derived products presented in Table 1. We continue to use long file names accordingly, matching IGS standards. Solutions provided in 2025 were primarily aligned with the ITRF2020/IGS20 frame (initial date Nov 18, 2022). Starting GPS Week 2394 (Nov 23rd, 2025) we updated our provided solutions to the ITRF2020-u2023/IGb20 frame. These incremental updates are not new to IGS developed frames (i.e ITRF2014-u2020/IGb14), but the frequency has increased to streamline incorporating data from new IGS network sites. In 2026 to keep pace with fellow Analysis Centers we plan to update our solutions again to the ITRF2020-u2024/IGc20 frame update including 11 newly added IGS reference frame stations.

We have also updated our Final submission products to include the midnight epoch value, at the end of the arc, starting with our GPS week 2334 submission. The second midnight epoch value will also be added to our daily Rapid submissions in the near future. With these changes, we continue to provide rapid products on a daily basis and include a

**Table 1:** Products provided by the NGS Analysis Center. DATE is in YYYYDDD format (ex. 2025230) for our currently provided products. This is an update from the GPS week-day format (wwwwd) used for older solutions on CDDIS before GPS Week 2237.

Current Products	
NGS0OPSRAP_{DATE}0000_01D_15M_ORB.SP3	Rapid GPS orbit solution
NGS0OPSRAP_{DATE}0000_01D_01D_ERP.ERP	Rapid Earth Rotation Parameters
NGS0OPSRAP_{DATE}0000_01D_01D_SUM.SUM	Rapid GPS combination summary
NGS0OPSFIN_{DATE}0000_01D_15M_ORB.SP3	Final GPS orbit solution
NGS0OPSFIN_{DATE}0000_01D_01D_SOL.SNX	Final PAGES position solution
NGS0OPSFIN_{DATE}0000_07D_01D_ERP.ERP	Final Earth Rotation Parameters
NGS0OPSFIN_{DATE}0000_07D_07D_SUM.SUM	Final GPS combination summary
Pre-Wk 2237 Products	
ngswwwwd.sp3	GPS only orbit solution
ngswwwwd.snx	PAGES position solution
ngswwww7.erp	Earth Rotation Parameters

daily ERP file. We are still working internally on the implementation of ultra-rapid products for the IGU combinations. New software under development at NGS should include the additional capabilities necessary to create this additional product. Combination statistics for NGS submissions can be found at the IGS Analysis Coordinator website (<http://acc.igs.org>). We are also in the process of developing the capacity to provide Final and Rapid products for GLONASS and GALILEO constellations.

### 3 Analysis Center Processing Software and Strategies

The NGS Analysis Center uses an in-house software package, Program for the Adjustment of GPS Ephemerides (PAGES), to estimate station positions, orbits, and EOPs from double-differenced GPS phase observables. NGS computes solutions from small regional clusters of stations through Delaunay triangulation. The last step combines the regions, at the normal equation level, into a global solution using the software package GPSCOM with no-net-rotation constraints. For details about the models and strategies used, please refer

to the [IGS contributions to ITRF2020](#) and [Altamimi et al. \(2023\)](#). Important distinctions in the models and strategies to the processing software include:

- High-frequency pole model from [Desai and Sibbois \(2016\)](#).
- Gravity model used is the global Earth GRACE Gravity Model 05 (GGM05). [Ries et al. \(2016\)](#)
- Solar radiation pressure model in use is ECOM2 for GPS satellites except Block IIF which uses ECOM1.
- Ocean loading model in use is FES2014.
- Interconnection of the Inertial and Terrestrial reference frame using the initial IAU 1976 Precession and 1980 Nutation Theory.

**Table 2:** Sites contributed to the IGS network during 2025.

Site	Location	Lat.	Long.	Receiver Type	System
(1) ASPA00USA	Pago Pago, American Samoa	-14.33	-170.72	SEPT- POLARX5	GPS+GLO+ GAL
BARH00USA	Bar Harbor, ME, USA	44.39	-68.22	LEICA GR30	GPS+GLO
(2) GUUG00USA	Mangilao, Guam, USA	13.433	144.80	TRIMBLE- ALLOY	GPS+GLO+ GAL
HNPT00USA	Cambridge, MD, USA	38.59	-76.13	LEICA GR50	GPS+GLO+ GAL
WES200USA	Westford, MA, USA	42.61	-71.49	TRIMBLE- ALLOY	GPS+GLO+ GAL
(3) BRFT00BRA	Eusebio, Brazil	-3.88	-38.43	SEPT- POLARX5	GPS+GLO+ GAL
EPRT00USA	Eastport, ME, USA	44.91	-66.99	LEICA GR50	GPS+GLO+ GAL

**Table 3:** Site Data facilitated by NGS during 2025

Site	Location	Lat.	Long.	Receiver Type	System
BJCO00BEN	Cotonou, Benin	6.38	2.45	TRIMBLE NETR5	GPS+GLO
GUAT00GTM	Guatemala City, Guatemala	14.59	-90.52	LEICA GRX1200GGPRO	GPS+GLO

## 4 Regional Data Center Core Products

During 2025, NGS contributed data from the sites listed in Table 2 to the IGS Network. The sites are broken down into three tiers. Tier one sites are currently active and stable enough to be used in the development of the modern IGS20/IGb20 and previous frames. Tier two are active, but were left out of the IGS20/IGb20 defining sites. Tier three sites are inactive, but do have historical IGS data available. NGS also facilitated data flow for the sites given in Table 3 as a Regional Data Center. Please refer to the IGS Network website [network.igs.org](http://network.igs.org) for site logs, photos, and data statistics for the sites serviced and facilitated by NGS.

## 5 Acknowledgements

The analysis and data center teams wish to express our gratitude to NGS and NOAA management for their support of this work as fundamental activities of NGS. For information about how these activities fit into NGS plans, see the [National Geodetic Survey Strategic Plan - 2024](#).

## 6 References

- Altamimi, Z., Rebischung, P., Collilieux, X., Métivier, L., and Chanard, K. (2023). ITRF2020: an augmented reference frame refining the modeling of nonlinear station motions. *Journal of Geodesy*, 97(47). doi: <https://doi.org/10.1007/s00190-023-01738-w>.
- Desai S.D. and Sibois A.E. (2016). Evaluating predicted diurnal and semidiurnal tidal variations in polar motion with GPS-based observations. *Journal of Geophysical Research: Solid Earth* 121(7), pages 5237-5256. doi: <https://doi.org/10.1002/2016JB013125>.
- Ries J., Bettadpur S., Eanes R., Kang Z., Ko U., McCullough C., Nagel P., Pie N., Poole S., Richter T., Save H., and Tapley B. (2016). Development and Evaluation of the Global

Gravity Model GGM05, CSR-16-02. Center for Space Research, The University of Texas at Austin.



# NRCan Analysis Center Technical Report 2025

S. Banville, S. Elson, R. Ghoddousi-Fard, O. Kamali,  
P. Lamothe, E. Maia Y. Mireault, T. Nikolaidou

Canadian Geodetic Survey, Natural Resources Canada  
588, Booth Street, Ottawa ON, Canada K1A 0Y7  
E-mail: [philippe.lamothe@NRCan-RNCan.gc.ca](mailto:philippe.lamothe@NRCan-RNCan.gc.ca)

## 1 Introduction


This report provides an overview of the major activities conducted at the NRCan Analysis Center (NRCan-AC) and product changes during the year 2025 (products labelled ‘EMR\*’). Furthermore, it includes an outline of the changes to the stations and services managed by NRCan. Finally, NRCan’s activities are presented with reference to the goals and objectives defined in the IGS Strategic Plan 2021+. Readers are referred to the Analysis Center Coordinator (ACC) web site at <http://acc.igs.org> for historical combination statistics of the NRCan-AC products. The NRCan-AC is located at the Canadian Geodetic Survey (CGS).

## 2 NRCan Core Products

From the beginning of 2025 until GPS week 2361 (April 6th), the Final GPS products were generated using a hybrid Gipsy-X setup combining v1.3 and v2 together with in-house developments (gPOD) (Nikolaidou et al., 2024). Since then, processing has transitioned fully to Gipsy-X v2 and is running on upgraded workstations/VMs. Starting with GPS week 2365 (May 4th), the in-house software SPARKNet has been adopted for clock and bias estimation and attitude computation. While Gipsy-X provides a robust and high-quality processing framework, the use of SPARKNet allowed a more tailored tuning of the estimation strategy for the clocks, leading to further performance gains. As an example, a reduction in satellite clock standard deviations was observed (Fig. 1). Gipsy-X/gPOD is continued to be used for the orbits, ERPs and SINEX products. The GNSS Rapid and Ultra-Rapid products continued to be generated using the Bernese software version 5.2

(Dach et al., 2015). IGS20/Repro3 standards have been implemented for all products. The products available from the NRCan-AC are summarized in Table 2. The Rapid products are available from the following anonymous ftp sites:

<ftp://cacsanrcan.gc.ca/gps/products>  
<ftp://cacsbnrcan.gc.ca/gps/products>

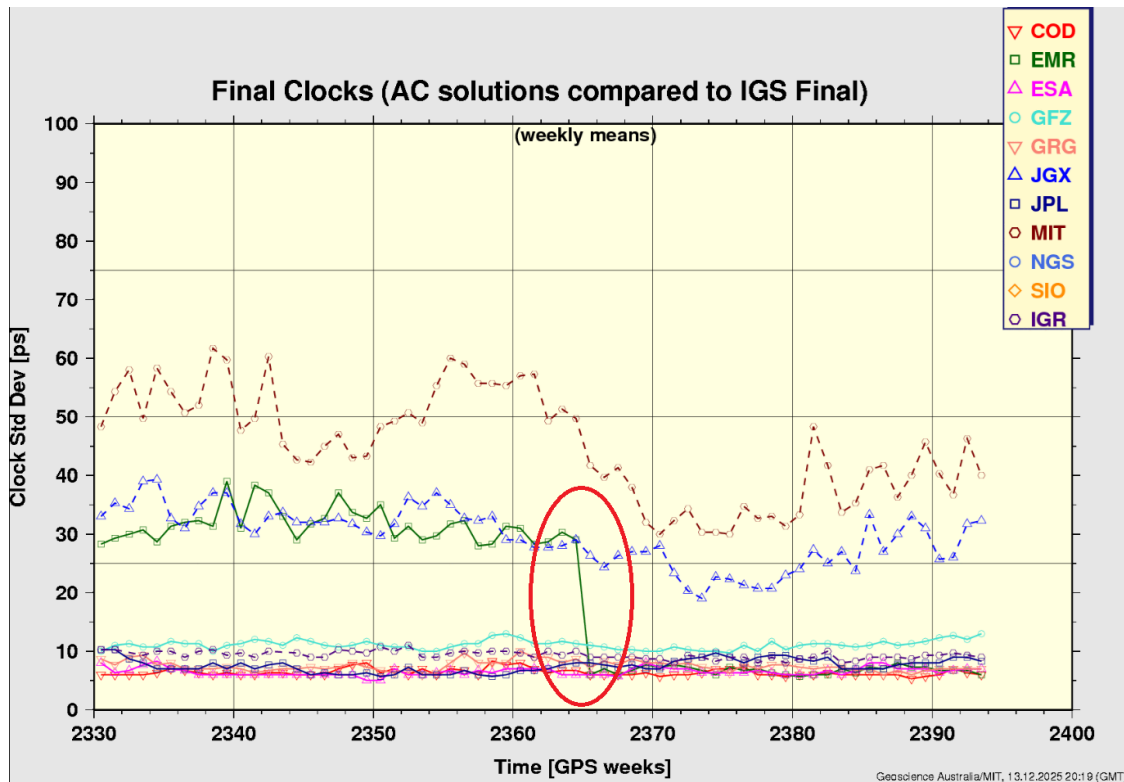

**Figure 1:** Standard deviations of the IGS final clock combination. The red ellipse signifies the EMR clock improvements resulting from the use of the in-house SPARKNet software.

### 3 Ionosphere and DCB monitoring

NRCan’s global ionosphere Total Electron Content (TEC) maps continued to be produced at 1-hour intervals (EMR00PSFIN\_[yyyy][ddd]0000\_01D\_01H\_GIM.INX.gz) and include GPS and GLONASS differential code biases (DCBs). They are available at CDDIS with a latency of less than 2 days. Apart from near-real-time maps that are being generated internally using Real-Time IGS stations, a daily 3-constellation (GPS, GLONASS, and Galileo) global TEC mapping and DCB estimation process continued to run internally and contributes to NRCan bias products. Station and satellite specific GLONASS DCB estimation using about 250 IGS stations collecting GLONASS measurements continued to

be monitored. Ionospheric irregularities as sensed by 1Hz GPS, GLONASS and Galileo phase rate measurements continued to be monitored in near-real-time from Real-Time IGS stations in a development platform to enhance studies on ionospheric irregularities. NRCAN continues to contribute to joint collaborations on ionospheric studies within IGS ([Krankowski et al., 2025](#)).

## 4 Real-time correction service

NRCAN continues to generate and disseminate precise real-time correction streams to the IGS based on a Decoupled Clock Model ([Collins et al., 2010](#)) implementation. The service provides GPS real-time satellite orbits and clocks from network of about 90-120 real-time stations. The resulting SSR products include orbit corrections (RTCM 1060 at 5 s and 1057 at 60 s), clock corrections (RTCM 1060 at 5 s), and code bias corrections (RTCM 1059 at 5 s) for GPS signals C1C, C1W, C2W, and C2C, together with support for other wide set of RTCM messages (1019, 1057, 1058, 1059, 1060, 1061, 1062, 1264, 1265). During 2025, NRCAN improved the stability and reliability of its IGS real-time mountpoint by troubleshooting and reconfiguring the real-time infrastructure and updating NTRIP casters resulting in a dedicated and more resilient IGS stream. Also, the IGS stream was migrated to the new in-house real-time rtCGS software platform, which removes previous internal architectural barriers and supports near future extension of NRCAN's AR clock and orbit products to multi-GNSS. New rtCGS software facilitates future enhancements in line with IGS real-time combination requirements. In addition, in the coming months, NRCAN adopts center-of-mass (CM) antenna phase center modeling for its dedicated IGS real-time stream, replacing the current L3 ionosphere-free convention, to ensure full compliance of its clocks and orbits with IGS standards and to enable better inclusion in the IGS real-time combination. NRCAN also runs internal testbed to study performance of Galileo High Accuracy Service compared to other real-time correction streams over Canada ([Ghoddousi-Fard, 2024, 2025](#)).

## 5 Operational NRCAN stations

In addition to routinely generating all core IGS products, NRCAN also provides public access to GNSS data for more than 100 Canadian stations. This includes 39 stations currently contributing to the IGS network through the CGS's Canadian Active Control System (CGS-CACS), the CGS's Regional Active Control System (CGS-RACS), and the Canadian Hazards Information Service's Western Canada Deformation Array (CHIS-WCDA). In addition to the 39 stations NRCAN contributes to the IGS network, a further 30 GNSS stations are submitted to IGS data centers. Over the past three years, CGS has expanded their national network of GNSS stations. An additional 14 GNSS stations were made publicly available in 2025. [Figure 2](#) shows a map of NRCAN's publicly available

GNSS network as of January 2026 and Table 1 contains a list of new CGS-CACS stations. Further details about NRCan stations and access to NRCan public GNSS data and site logs can be found at:

<https://webapp.csr-scrs.nrcan-rncan.gc.ca/geod/data-donnees/cacs-scca.php>

or from the following anonymous ftp sites:

<ftp://cacs.a.nrcan.gc.ca/gps>

<ftp://cacs.b.nrcan.gc.ca/gps>

**Table 1:** NRCan-CGS New CACS Stations in 2025.

Station	Installation Date	Location
AUGO00CAN	2023-07-02	Athabasca, Alberta
CALV00CAN	2022-09-25	Calvert Island, British Columbia
CPAB00CAN	2022-07-03	Channel Port-aux-Basques, Newfoundland
IQLK00CAN	2023-06-10	Iqaluktuuttiaq, Nunaut
KAKA00CAN	2023-10-26	Kakabeka Falls, Ontario
KENO00CAN	2024-05-28	Keno City, Yukon
KLAT00CAN	2024-09-18	L'Anse aux Meadows, Newfoundland
PARQ00CAN	2024-07-05	Parent, Québec
PMNR00CAN	2024-10-19	Port-Menier, Québec
POWR00CAN	2023-07-30	Powell River, British Columbia
RIGO00CAN	2024-06-26	Rigolet, Labrador
SSMR00CAN	2023-05-03	Sault-Ste.-Marie, Ontario
WOLL00CAN	2024-10-22	Wollaston Lake, Saskatchewan
WRIT00CAN	2024-02-25	Writing-on-Stone, Alberta

## 6 NRCan Contribution to the IGS Strategic Plan 2021+

NRCan (then part of Energy, Mines and Resources, EMR) has been a contributor to the IGS since the 1992 IGS pilot phase and provided initial Analysis Centre coordination. NRCan's activities directly support the goals and objectives of the IGS Strategic Plan 2021+ through sustained delivery of high-quality GNSS products, methodological development, and long-term infrastructure stability.

### Contribution to Goal 1: Achieve Multi-GNSS Technical Excellence

NRCan contributes to the IGS objective of multi-GNSS technical excellence through the routine generation of precise GNSS analysis products in compliance with IGS standards



**Figure 2:** NRCan Public GNSS Stations (CGS-CACS, CGS-RACS, CHIS-WCDA). Stations installed in 2025 are shown in green.

and performance requirements. In 2025, NRCan transitioned to exclusively use RINEX3 data for the generation of its products and expanded its Gipsy-X/gPOD capabilities to multi-GNSS including Galileo and GLONASS in testing mode, while maintaining its operational GPS Final and GPS+GLONASS Rapid and Ultra-Rapid products.

In 2025, migrating the IGS real time stream to the in house rtCGS platform marked an important step toward NRCan’s multi GNSS capability by removing legacy architectural constraints and establishing a clear pathway to extend ambiguity resolved clocks/orbits and bias products to additional constellations. In parallel, NRCan maintained continuity and improved the stability of its operational GPS real time service dedicated to IGS. Within rtCGS, NRCan’s real time computing engine implements the Decoupled Clock Model (DCM) estimation strategy (Collins et al., 2010), which is extendable to multi-

GNSS and supports high-rate PPP AR applications. Overall, NRCAN's and the IGS real time approaches remain aligned in terms of workflows and emerging multi GNSS combination requirements.

A key contribution of NRCAN to Goal 1 has been the development and validation of the clock and bias estimation software SPARKNet. SPARKNet was used to generate the clock and bias products for the IGS repro3 campaign (1996-2020) matching the performance of products from other IGS Analysis Centers (Geng et al., 2024).

Since May 2025, NRCAN operationally uses SPARKnet for the generation of satellite phase and code bias products and the consistent dissemination of the satellite attitude model within its analysis workflow. These products contribute to the accurate modeling of GNSS observations and support advanced applications such as precise point positioning with ambiguity resolution (PPP-AR), thereby enhancing the overall quality and consistency of IGS products.

In addition, SPARKCombo, NRCAN's clock and bias combination software is one of the two candidate software for next-generation multi-GNSS combined products generated by the IGS.

Overall, NRCAN maintains and operates an independent analysis and validation chain based on in-house software developments, including its POD processing framework (gPOD), clock and bias estimation software (SPARKNet), clock combination software (SPARK-Combo) and monitoring system for daily assessment. This contributes to technical diversity and redundancy within the IGS, strengthening the robustness of combined products. Through consistent multi-GNSS processing and long-term solution stability, NRCAN supports IGS monitoring, benchmarking, and coordination activities aimed at tracking progress toward full multi-GNSS capability.

## **Contribution to Goal 2: Strengthen Outreach and Engagement**

Beyond its role as an Analysis Center, NRCAN advances the IGS goal of outreach and engagement through the operation and continuous enhancement of the Canadian Spatial Reference System Precise Point Positioning (CSRS-PPP) service. CSRS-PPP is a free, publicly accessible GNSS post-processing service that enables users worldwide to derive highly precise static and kinematic coordinates from RINEX observation data without reliance on nearby reference stations, thereby giving access to precise positioning in both local (NAD83) and global (ITRF) frames. In 2025, a major upgrade introduced support for Galileo PPP with Ambiguity Resolution (PPP-AR), enabling more rapid convergence and improved accuracy by resolving integer carrier-phase ambiguities on multi-GNSS data, and expanding the range of supported GNSS signals. Over time the service has broadened satellite constellation support, adopted latest reference frame realizations, and increased its active users around the globe. Through these developments, CSRS-PPP enhances user access to high-precision GNSS positioning, exemplifies the utility of AC's products and IGS standards in real-world applications, and reinforces IGS advocacy for open, interoperable

geodetic services.

Overall, NRCan supports IGS outreach and engagement objectives by ensuring that all contributed products are openly available to the global scientific and operational community, in accordance with IGS open-data principles. The NRCan AC participates in IGS coordination activities, technical exchanges, and reporting, contributing expert knowledge to the broader GNSS and geodetic community.

By adhering to IGS standards, formats, and conventions, NRCan facilitates interoperability and downstream use of IGS products in scientific research, positioning, navigation, timing, and Earth observation applications. These contributions help reinforce the role of IGS as a trusted provider of standardized, high-quality GNSS products.

### **Contribution to Goal 3: Build Sustainability and Resilience**

NRCan supports IGS Goal 3 through the operation and long-term maintenance of the Canadian Active Control System (CACS) network. CACS is a national network of continuously operating GNSS reference stations that forms a core component of the Canadian Spatial Reference System. Through CACS, NRCan provides stable, high-quality GNSS tracking infrastructure that supports both national geodetic requirements and international services such as the IGS. The network contributes to the long-term continuity, reliability, and geographical diversity of the global GNSS tracking infrastructure.

The sustained operation of CACS strengthens IGS resilience by:

- Providing redundant, high-quality GNSS observations that support global product generation and validation.
- Ensuring long-term station stability and data continuity, which are essential for reference frame realization and geophysical applications.
- Supporting the integration of research and operational activities, as CACS data are used both for routine services and scientific investigations.

By maintaining a nationally funded, operationally robust GNSS network aligned with international standards, NRCan enhances the sustainability of the IGS observational infrastructure. This contribution directly supports IGS objectives related to infrastructural diversity, long-term resilience, and the provision of open-access geodetic data in support of global reference frames and Earth system monitoring.

Further NRCan provides continuous AC operations and maintains a complete processing strategy e.g., from data to products, over extended time periods. These efforts support IGS reprocessing activities and the long-term consistency of GNSS products used in terrestrial reference frame realizations.

The operation of independent software systems and analysis infrastructure enhances the diversity and resilience of IGS product generation. NRCan's integration of research-driven developments within an operational processing environment supports the dual role of the

IGS as both a collaborative research program and an operational service. Through its sustained commitment to open access GNSS products and international collaboration, NRCan supports IGS alignment with global geodetic and Earth observation frameworks.

## 7 Acknowledgement

©Her Majesty the King in right of Canada 2025

## References

- Collins, P., Bisnath, S., Lahaye, F. and Héroux, P. (2010). “Undifferenced GPS ambiguity resolution using the decoupled clock model and ambiguity datum fixing”. *Navigation*, 57(2), pp.123-135.
- Dach R., S. Lutz, P. Walser and P. Fridez (2015). “Bernese GNSS Software Version 5.2”, AIUB, Astronomical Institute, University of Bern.
- Ghoddousi-Fard R. (2024). “Galileo High Accuracy Service and other public real-time precise GNSS correction products: A real-time PPP assessment over Canadian stations”, COSPAR 45th Scientific Assembly, Busan, Korea, July 13-21, 2024.
- Geng J., Z. Yan, Q. Wen, B. Männel, S. Masoumi, S. Loyer, T. Mayer-Gürr, S. Schaer (2024). “Integrated satellite clock and code/phase bias combination in the third IGS reprocessing campaign”, *GPS Solutions* 28:150, doi: 10.1007/s10291-024-01693-9.
- Ghoddousi-Fard R. (2025). “Real-time GNSS PPP with different correction streams during ionospheric disturbances over Canadian region”, Beacon Satellite Symposium 2025, Rome, Italy, November 10-14, 2025.
- Krankowski A., M. Hernandez-Pajares, A. Fron, A. Komjathy, Z. Li, S. Schaer, N. Wang, J. Feltens, R. Ghoddousi-Fard, and I. Cherniak (2025). “IGS Ionosphere Committee - Current Status and Path Forward”, Beacon Satellite Symposium 2025, Rome, Italy, November 10-14, 2025
- Nikolaidou T., Maia E., Lamothe P., Elmezayen A. (2024). “Validation Of New Generation of NRCan’s Final GPS Orbit, Clock and Earth Rotation Products and PPP Performance”, IGS Workshop 2024, Bern, Switzerland, 1-5 July 2024.

**Table 2:** NRCan-AC products.

Product	Description
Repro2:	
em2wwwwd.sp3	GPS only
em2wwwwd.c1k	<ul style="list-style-type: none"> <li>• Time Span 1994-Nov-02 to 2014-Mar-29</li> </ul>
em2wwwwd.snx	<ul style="list-style-type: none"> <li>• Use of JPL's GIPSY-OASIS II v6.3</li> </ul>
em2wwww7.erp	<ul style="list-style-type: none"> <li>• Daily orbits, ERP and SINEX</li> <li>• 5-min clocks</li> <li>• Submission for IGS repro2 combination</li> </ul>
Repro3:	
EMR0R03FIN_yyyydoy0000_01D_01D_0SB.BIA	
EMR0R03FIN_yyyydoy0000_01D_30S_CLK.CLK	
EMR0R03FIN_yyyydoy0000_01D_30S_ATT.OBX	
	GPS only
	<ul style="list-style-type: none"> <li>• Time Span 1996-Jan-01 to 2020-Dec-31</li> <li>• In-house software (SPARKNet)</li> <li>• 30-sec clocks</li> <li>• Based on NGS repro3 solution (ERP, SP3 and SNX)</li> <li>• Submission for IGS repro3 combination</li> </ul>

**Table 2:** NRCan-AC products (continued).

Product	Description
Final (weekly):	
EMROOPSFIN_yyyydoy0000_01D_15M_ORB.SP3	
EMROOPSFIN_yyyydoy0000_01D_01D_SOL.SNX	
EMROOPSFIN_yyyydoy0000_01D_30S_CLK.CLK	
EMROOPSFIN_yyyydoy0000_07D_01D_ERP.ERP	
EMROOPSFIN_yyyydoy0000_07D_01D_SUM.SUM	
	GPS only
	<ul style="list-style-type: none"> <li>• Since 1994 and ongoing</li> <li>• Use of JPL's GIPSY-OASIS II v6.4 from 2016-Feb-01to 2022-Nov-26</li> <li>• Use of JPL's GipsyX (mix of v1.3 and 2.0) since 2022-Nov-27</li> <li>• Use of SPARKNet since 2025-May-4</li> <li>• Daily orbits, ERP and SINEX from GipsyX/gPOD</li> <li>• Satellite clocks, phase &amp; code biases, attitude model from SPARKNet</li> <li>• Weekly submission for IGS Final combination</li> </ul>
Rapid (daily):	
emrwwwwd.sp3	GPS only
emrwwwwd.clk	<ul style="list-style-type: none"> <li>• From July 1996 to 2011-05-21</li> <li>• Use of JPL's GIPSY-OASIS (various versions)</li> <li>• Orbits, 5-min clocks and ERP (30-sec clocks from 2006-Aug-27)</li> <li>• Daily submission for IGR combination</li> </ul>
emrwwwwd.erp	
	GPS+GLONASS
	<ul style="list-style-type: none"> <li>• Since 2011-Sep-06 and ongoing</li> <li>• Use of Bernese 5.0 until 2015-Feb-11</li> <li>• Use of Bernese 5.2 from 2015-Feb-12</li> <li>• Daily orbits and ERP</li> <li>• 30-sec GNSS clocks</li> </ul>

---

**Table 2:** NRCan-AC products (continued).

Product	Description
Ultra-Rapid (hourly):	
emuwwwd_hh.sp3	GPS only
emuwwwd_hh.clk	<ul style="list-style-type: none"> <li>• From early 2000 to 2013-09-13, hour 06</li> </ul>
emuwwwd_hh.erp	<ul style="list-style-type: none"> <li>• Use of Bernese 5.0</li> <li>• Orbits, 30-sec clocks and ERP (hourly)</li> <li>• Submission for IGU combination (4 times daily)</li> </ul>
GPS+GLONASS	
	<ul style="list-style-type: none"> <li>• Since 2013-09-13, hour 12</li> <li>• Use of Bernese 5.0 until 2015-Feb-12</li> <li>• Use of Bernese 5.2 since 2015-Feb-13</li> <li>• Orbits and ERP (hourly)</li> <li>• 30-sec GNSS clocks (every 3 hours)</li> <li>• 30-sec GPS-only clocks (every other hours)</li> <li>• Submission for IGU/IGV combination (4 times daily)</li> <li>• From 2020-10-20, hourly 30-sec GLONASS clocks produced (used to be every 3h) in addition to orbits and ERP with a delay of less than one hour.</li> </ul>
Real-Time:	
GPS only	
	<ul style="list-style-type: none"> <li>• Since 2011-11-10 until 2018-05-07</li> <li>• In-house software (HPGPS.C)</li> <li>• RTCM messages: <ul style="list-style-type: none"> <li>– orbits and clocks:1060 positions at Antenna Reference Point float ambiguity clocks</li> <li>– pseudorange biases: 1059</li> <li>– phase biases: 1265</li> </ul> </li> <li>• Interval: 5 sec</li> </ul>
GPS only	
	<ul style="list-style-type: none"> <li>• Since 2018-05-08</li> <li>• In-house software (HPGPS.C)</li> <li>• RTCM messages: <ul style="list-style-type: none"> <li>– orbits and clocks:1060 positions at Antenna Reference Point phase clocks</li> <li>– pseudorange biases: 1059</li> <li>– phase biases: 1265 (proposed)</li> </ul> </li> <li>• Interval: 5 sec</li> </ul>



# USNO Analysis Center Technical Report 2025

S. Byram, J. Crefton, E. Lovegrove

United States Naval Observatory  
3450 Massachusetts Avenue Northwest  
Washington DC 20392 USA  
[sharyl.m.byram.civ@us.navy.mil](mailto:sharyl.m.byram.civ@us.navy.mil)

## 1 Introduction

The United States Naval Observatory (USNO), located in Washington, DC, USA has served as an IGS Analysis Center (AC) since 1997, contributing to the IGS Rapid and Ultra-rapid Combinations since 1997 and 2000, respectively. USNO contributes a full suite of rapid products (orbit and clock estimates for the GPS satellites, Earth rotation parameters (ERPs), and receiver clock estimates) once per day to the IGS by the 1600 UTC deadline, and contributes the full suite of Ultra-rapid products (post-processed and predicted orbit/clock estimates for the GPS satellites; ERPs) four times per day by the pertinent IGS deadlines.

The USNO AC is hosted in the GPS Analysis Division (GPSAD) of the USNO Earth Orientation Department. USNO AC activities, chairing the IGS Troposphere Committee, and serving on the IGS Governing Board are overseen by Dr. Sharyl Byram. All GPSAD members, including Mr. Jeffrey Crefton, and Dr. Elizabeth Lovegrove participate in the USNO AC efforts.

USNO AC products are computed using Bernese GNSS Software ([Dach et al., 2015](#)). Rapid products are generated using a combination of network solutions and precise point positioning (PPP; [Zumberge et al., 1997](#)). Ultra-rapid products are generated using network solutions. IGS Final Troposphere Estimates are generated using Precise Point Positioning (PPP).

GPSAD also generates a UT1-UTC-like value, UTGPS, four times per day. UTGPS is a GPS-based extrapolation of UT1-UTC measurements. The IERS (International Earth Rotation and Reference Systems Service) Rapid Combination/Prediction Service uses UT-GPS in their combined daily processing of UT1-UTC. Mr. Crefton oversees UTGPS.

More information about USNO Rapid, Ultra-rapid, Troposphere, and UTGPS products can be found at the USNO website: <https://maia.usno.navy.mil/products/gps-analysis>. The IGS Final Troposphere Estimates can also be downloaded at <https://cddis.nasa.gov/archive/gnss/products/troposphere/zpd/>.

## 2 Product Performance, 2025


Figures 1-4 show the 2025 performance of USNO Rapid and Ultra-rapid GPS products, with summary statistics given in Table 1. USNO rapid orbits had a median weighted RMS (WRMS) of 18 mm with respect to (wrt) the IGS rapid combined orbits. The USNO Ultra-rapid orbits had median WRMSs of 20 mm (24-h post-processed segment) and 41 mm (6-h predict) wrt the IGS rapid combined orbits. USNO rapid (post-processed) and Ultra-rapid 6-h predicted clocks had median 137 ps and 671 ps RMSs wrt IGS combined rapid clocks.

USNO rapid polar motion estimates had (x, y) 26 and 21 microarcsec RMS differences wrt IGS rapid combined values, respectively. USNO Ultra-rapid polar motion estimates differed (RMS of x, y) from IGS rapid combined values by 152 and 274 microarcsec for the 24-h post-processed segment, respectively. The USNO Ultra-rapid 24-h predict-segment values differed (RMS of x, y) from the IGS rapid combined values by 356 and 364 microarcsec, respectively.


All USNO AC official products were generated with the Bernese GNSS Software in 2025 and were produced using the IGS20 or IGb20 reference frame as appropriate.

## References


- Dach, R., S. Lutz, P. Walser, and P. Fridez (eds.). Bernese GNSS Software Version 5.2 (user manual). Astronomical Institute of University of Bern, Bern, Switzerland, 2015.
- Zumberge J.F., M.B. Hefflin, D.C. Jefferson, M.M. Watkins, and F.H. Webb. Precise Point Positioning for the Efficient and Robust Analysis of GPS Data from Large Networks. *J. Geophys. Res.*, 102 (B3), 5005-17, 1997.

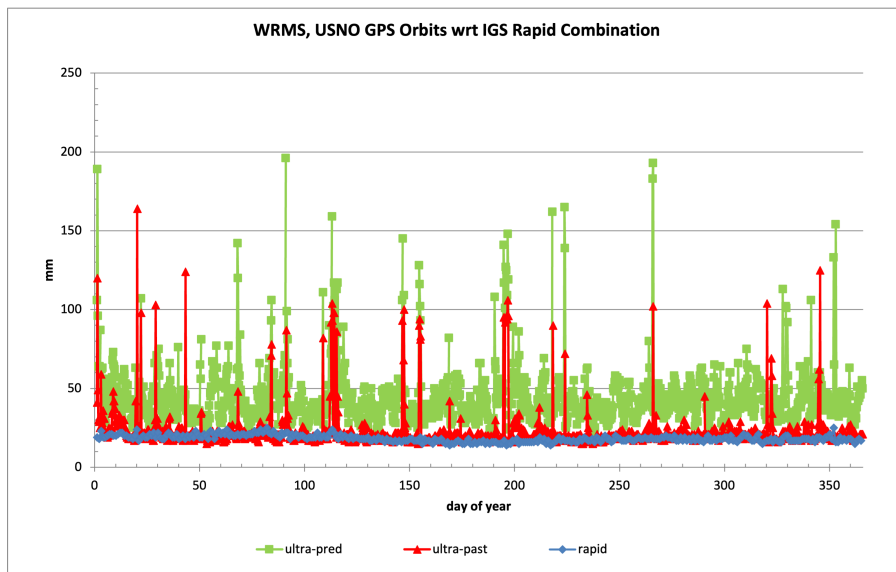


**Figure 1:** Weighted RMS of USNO GPS orbit estimates with respect to IGS Rapid Combination, 2025. “Ultra-past” refers to 24-hour post-processed section of USNO Ultra-rapid orbits. “Ultra-pred” refers to first six hours of Ultra-rapid orbit prediction.

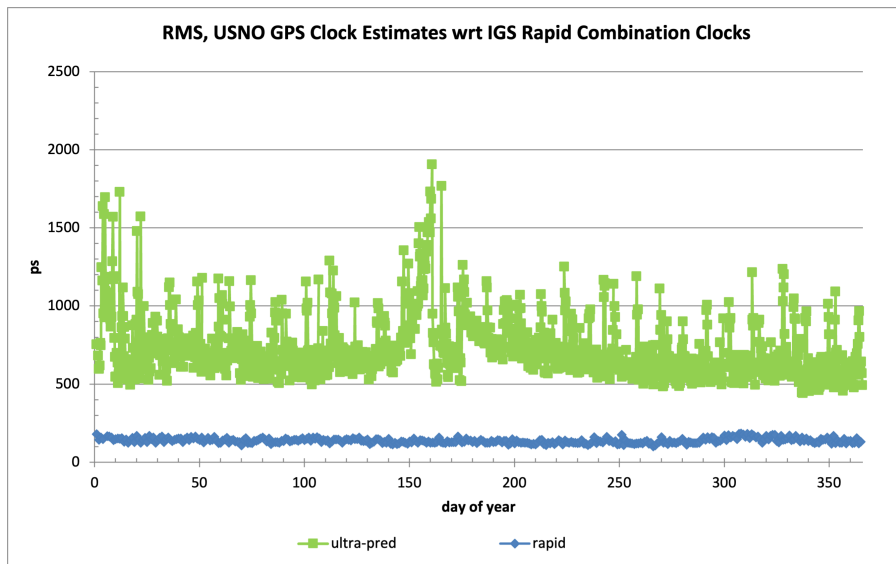

**Figure 2:** RMS of USNO GPS Rapid clock estimates and Ultra-rapid clock predictions with respect to IGS Rapid Combination, 2025.

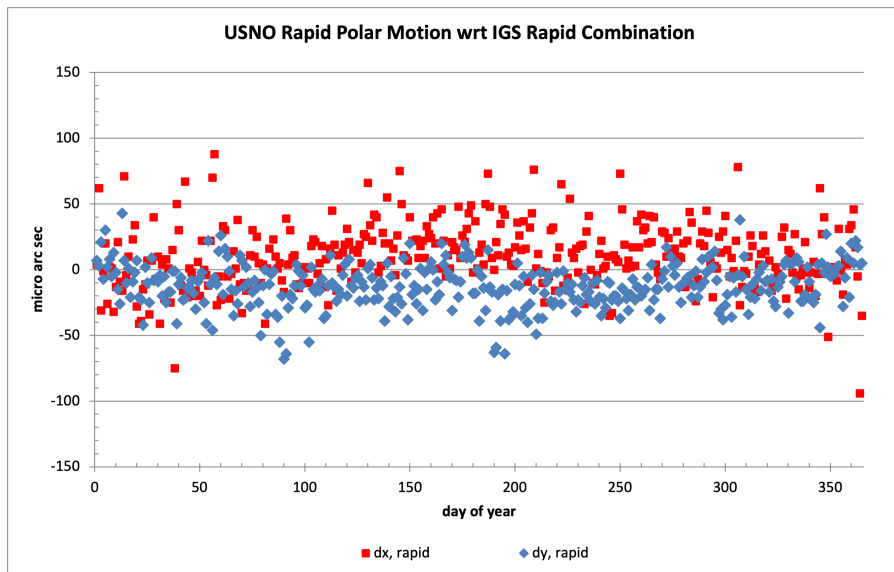

**Figure 3:** USNO Rapid Polar Motion estimates differenced with IGS Rapid Combination values, 2025.

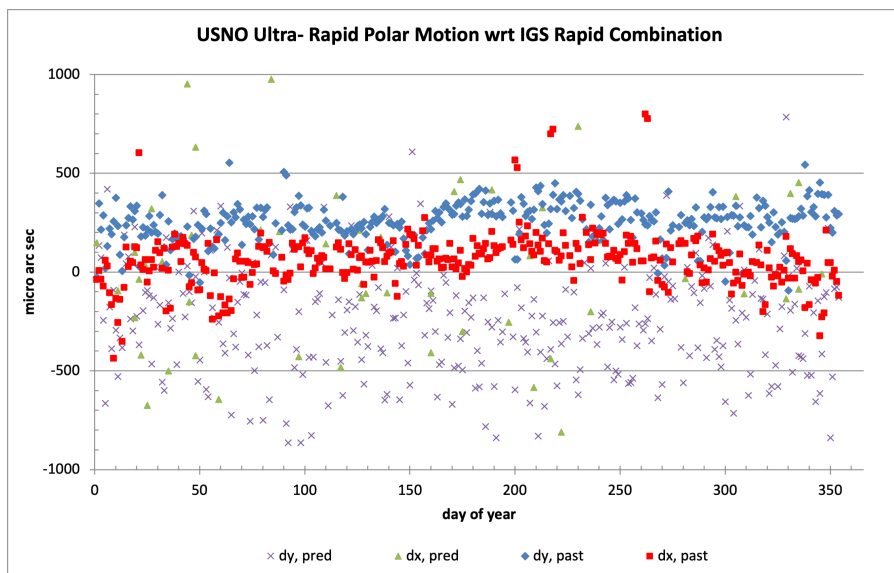

**Figure 4:** USNO Ultra-rapid Polar Motion estimates differenced IGS Rapid Combination values, 2025. “pred” denotes predicted and “past” denotes post processed.

**Table 1:** Precision of USNO Rapid and Ultra-Rapid Products, 2025. All statistics computed with respect to IGS Combined Rapid Products.

USNO GPS satellite orbits				USNO GPS-based polar motion estimates						USNO GPS-based clock estimates	
Statistic: median weighted RMS difference units: mm				Statistic: RMS difference units: $10^{-6}$ arc sec						Statistic: median RMS difference units: ps	
dates	rapid	ultra-rapid past 24 h	ultra-rapid 6-h predict	rapid		ultra-rapid				rapid	ultra-rapid
				x	y	past 24 h		24-h predict		past 24 h	6-h predict
				x	y	x	y	x	y		
1/1/2025 – 12/31/2025	18	20	41	26	21	152	274	356	364	137	671



# Wuhan University Analysis Center Technical Report 2025

M. Li<sup>1</sup>, N. Wei<sup>1</sup>, L. Fan<sup>2</sup>,  
Y. Zhou<sup>1</sup>, Q. Zhao<sup>1</sup>, C. Shi<sup>1,2</sup>

<sup>1</sup> GNSS Research Center, Wuhan University, Wuhan, China

<sup>2</sup> Beihang University, Beijing, China

E-mail: [limin@whu.edu.cn](mailto:limin@whu.edu.cn)

## 1 Introduction

Since 2012, the IGS Analysis Center at Wuhan University (WHU) has been a key contributor to the International GNSS Service (IGS), providing precise ultra-rapid, rapid, and MGEX products on a regular basis. These products are generated using the latest version of the Positioning and Navigation Data Analyst (PANDA) software ([Liu and Ge, 2003](#); [Shi et al., 2008](#)).

In 2025, besides the routine generation of precise GNSS products, efforts were devoted to improve the accuracy of geocenter motion parameters based on GNSS observations, including non-loading model improvements and the use of GPS-SLR space ties onboard LEO satellites.

## 2 WHU Analysis Products

The products provided by WHU are summarized in [Table 1](#).

---

## 3 Refined Geocenter Motion derived from GNSS displacements

Geocenter motion (GCM) refers to the motion of the Earth's center of figure (CF) relative to its center of mass (CM). It is closely related to the definition of the reference

**Table 1:** List of products provided by WHU.

WHU rapid GNSS products	
WHUOOPSRAP_YYYYDDDHH00_01D_15M_ORB.SP3	Orbits for GPS/GLONASS/Galileo satellites
WHUOOPSRAP_YYYYDDDHH00_01D_05M_CLK.CLK	5-min clocks for stations and GPS/GLONASS/Galileo satellites
WHUOOPSRAP_YYYYDDDHH00_01D_01D_ERP.ERP	ERPs
WHU ultra-rapid GNSS products	
WHUOOPSULT_YYYYDDDHH00_02D_15M_ORB.SP3	Orbits for GPS/GLONASS/Galileo satellites, provided to IGS every 6 hours
WHUOOPSULT_YYYYDDDHH00_02D_01D_ERP.ERP	observed and predicted ERPs provided to IGS every 6 hours
WHU Hourly GNSS products	
WUMOMGXNRT_YYYYDDDHH00_02D_05M_ORB.SP3	Orbits and clock for GPS/ GLONASS/ Galileo/ BDS/ QZSS satellites provided to IGS-MGEX every 1 hours
WUMOMGXNRT_YYYYDDDHH00_02D_05M_CLK.CLK	
WUMOMGXNRT_YYYYDDDHH00_02D_30S_CLK.CLK	
WUMOMGXNRT_YYYYDDDHH00_02D_01D_ERP.ERP	Observed and predicted ERPs provided to IGS-MGEX every 1 hours
WUMOMGXNRT_YYYYDDDHH00_01D_01D_OSB.BIA	code/phase biases related to the NRT orbit and clock corrections, Bias-SINEX format
WUMOMGXNRT_YYYYDDDHH00_02D_30S_ATT.OBX	Satellite attitude, ORBEX format
WHU Ionosphere products	
whugDDD0.YYi	Final GIM with 3-d GPS/GLONASS observations
whrgDDD0.YYi	Rapid GIM with 1-d GPS/GLONASS observations
WUMOMGXRAP_YYYYDDD0000_01D_01D_ABS.BIA	Rapid OSB with 1-d multi-GNSS observations
ION000WHUO	Real time GIM with 5-min GPS observations


frame origin: the realization of the International Terrestrial Reference Frame (ITRF) corresponds to the CM on secular timescales but coincides with the CF on seasonal and shorter timescales before the release of ITRF2020 (Dong et al., 1997). GNSS, with its extensive global tracking network and continuous observations characterized by high spatial and temporal resolution, has proven to be a pivotal tool for estimating GCM with high precision.

With the GNSS technique, two methods can be employed for GCM estimation: the network shift approach and the degree-1 deformation approach. The accuracy of the GNSS-derived GCM model based on degree-1 deformation approach has improved in two aspects: the improvement of estimation methods and the update of GNSS data. First, in the degree-1 deformation approach to estimate GCM, the global degree-1 deformation is


assumed to be primarily caused by surface mass redistribution [Blewitt G. \(2003\)](#). However, GNSS displacements include significant signals that are unrelated to surface mass loading, known as non-loading errors. Previous studies have shown that only about 40% of vertical and less than 20% of horizontal annual GNSS displacements can be explained by large-scale loading models ([Dong et al., 2002](#); [Niu et al., 2022](#)). These errors can bias GCM estimates if not properly corrected.

To address this issue, we modeled and removed three types of non-loading errors, including bedrock thermoelastic deformation, GNSS draconitic errors, and background noise in GNSS residuals, with the purpose of improving GCM accuracy ([Wei et al., 2025](#)). [Figure 1](#) shows the GCM derived from GNSS residuals before and after the removal of these three types of non-loading errors, together with independent reference GCM datasets from geophysical loading models. The results demonstrate that thermoelastic deformation is a significant contributor to the inconsistency between GNSS and other techniques in the annual variation of the Z component. It causes an annual variation with an amplitude of about 1.8 mm. Meanwhile, non-seasonal scatter in the GNSS-derived X and Y components is notably reduced after removing draconitic errors and filtering background noise. These corrections together significantly improve the consistency of GNSS-derived GCM with independent estimates.

Second, we found that the accuracy of GCM derived from GNSS using the degree-1 deformation approach has been greatly improved from the second to the third reprocessing campaigns (repro2 and repro3) ([Zhou et al., 2025](#)). We compared the GCM obtained from repro2 and repro3 station position residuals for the period 2003–2014, based on the same set of stations. The time series of obtained GCM are shown in [Figure 2](#). In terms of the annual variations, the repro3-derived GCM outperforms the repro2-derived GCM, particularly in the Y component. The relatively poorer performance of repro2 in the Y component is mainly attributed to stronger draconitic errors, with the annual phase deviation reduced from  $56^\circ$  to  $20^\circ$  after mitigating these errors. For the intra-seasonal variations, repro2 is more scattered compared with repro3, while the correction of draconitic errors also improves their consistency. The improvement in GCM primarily results from the higher precision of station position time series in repro3 relative to repro2 ([Rebischung et al., 2024](#)). More specifically, the draconitic signals in repro3 station position residuals have been notably reduced compared with repro2, benefiting from refined GNSS satellite orbit modeling. In addition, the inclusion of Galileo observations in repro3 may also contribute.

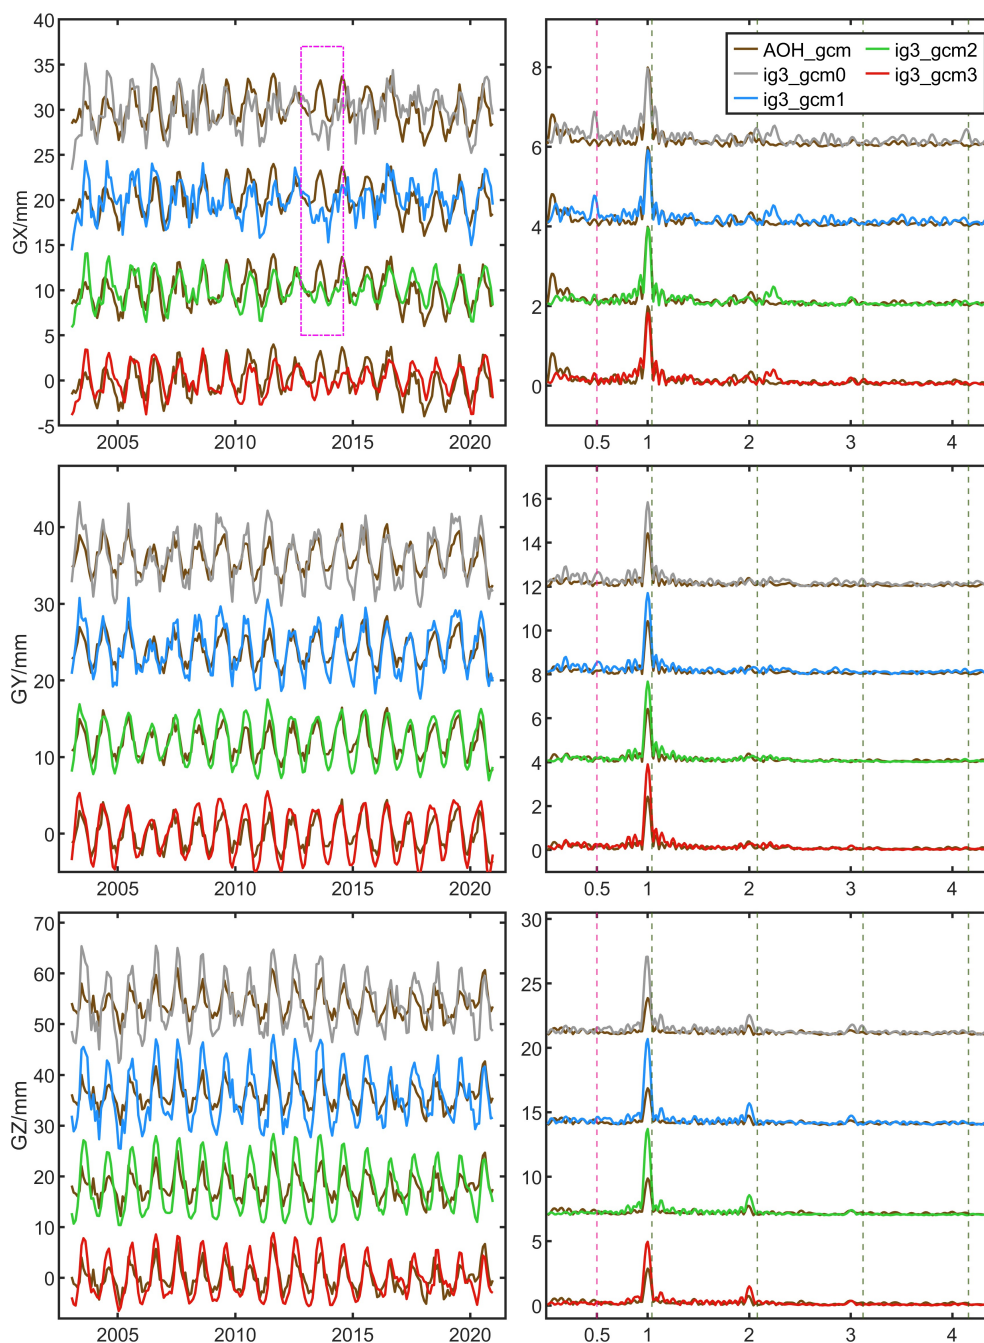

**Figure 1:** Time series and periodograms of the geocenter motion derived from four sets of GNSS residual time series (ig3\_gcm0–ig3\_gcm1) and the geophysical models (AOH\_gcm). The magenta box highlights an abnormal fluctuation in GX. For ig3\_gcm0–ig3\_gcm3, the three solutions represent the results after sequentially removing draconitic errors, background noise, and thermoelastic deformation. The dashed lines denote the 0.5 cycles-per-year (cpy) harmonic (pink) and the first four draconitic harmonics (green). Offsets of 10, 12, and 18 mm have been added to the time series of GX, GY, and GZ, respectively. Offsets of 2, 4, and 7 mm have been added to the corresponding periodograms.

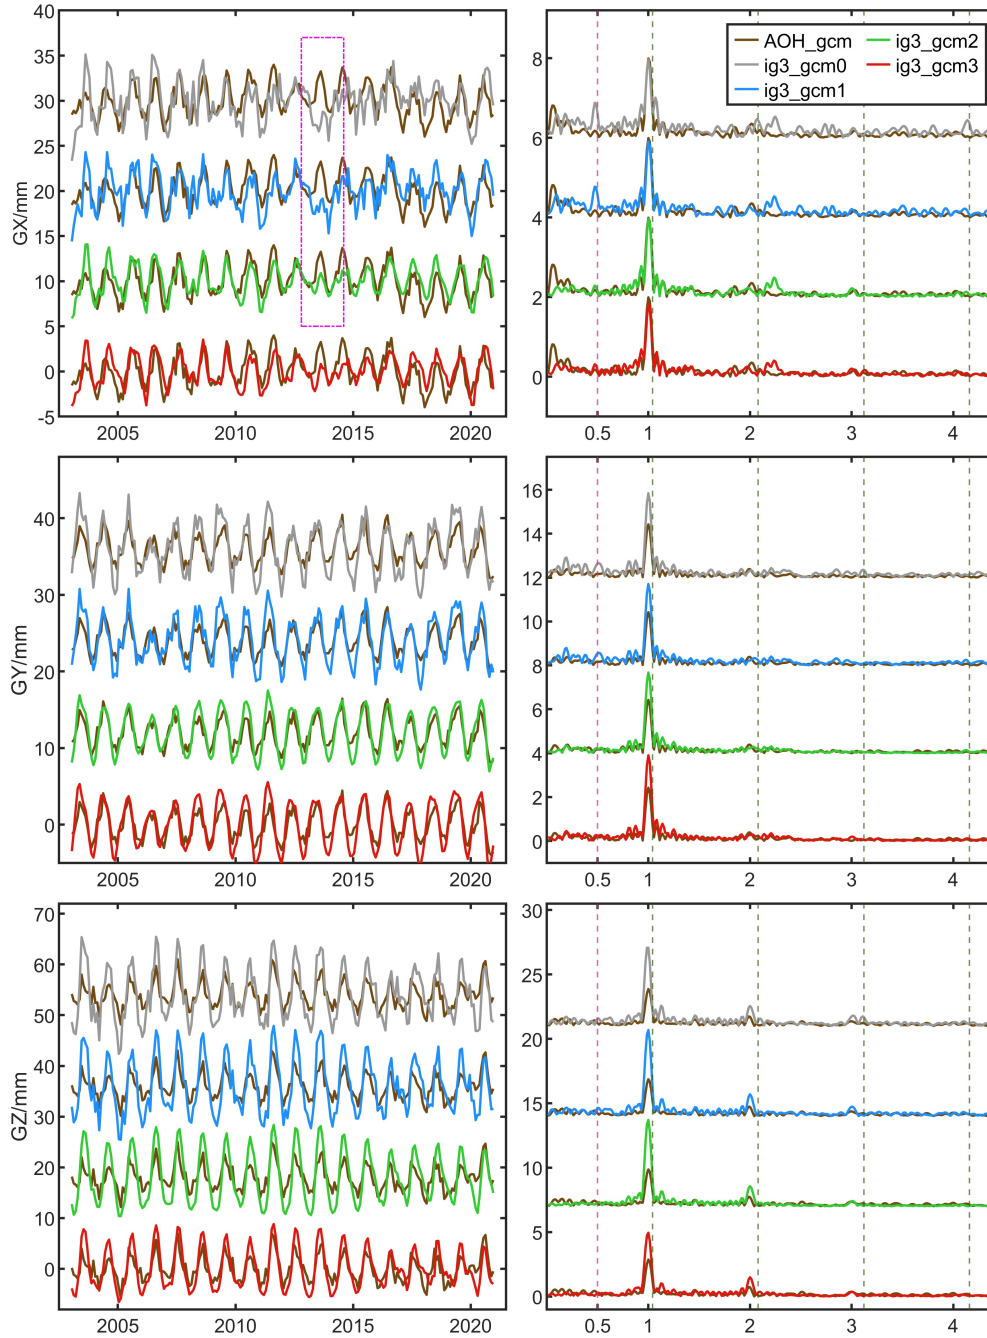


**Figure 2:** Time series and amplitude spectra of repro2 (ig2\_gcm0-ig2\_gcm2) and repro3 (ig3\_gcm0-ig3\_gcm2) GCM. The AOH\_gcm is displayed as reference values, consistent with Figure 1. For both repro2 and repro3, gcm0 gcm2 represent the GCM estimates before correction, after removing draconitic errors, and after further removing thermoelastic deformation, respectively. Offsets of 14, 14, and 25 mm have been added to the time series of GX, GY, and GZ, respectively. Offsets of 4, 4, and 8 mm have been added to the corresponding periodograms. The dashed lines in the right panel denote annual and semi-annual harmonics (blue) and the first three draconitic harmonics (pink).

## 4 Global geodetic parameter determination using GPS-SLR space ties onboard LEO satellites

Global geodetic parameters, such as Geocenter Coordinates (GCCs) and Earth Rotation Parameters (ERPs), are critical for the definition of the International Terrestrial Reference Frame (ITRF) and geophysical studies. Traditional ITRF realization relies heavily on ground-based local ties to combine multiple space geodetic techniques, but these ties suffer from spatial unevenness, high maintenance costs, and infrequent updates. Low Earth Orbit (LEO) satellites equipped with multi-geodetic payloads have emerged as a transformative solution, offering "space ties" that enable inter-technique linkage independent of ground surveys. This co-location configuration compensates for the limitations of single GNSS technique, and provides advantages such as multi-payload compatibility, enhanced observation geometry, high temporal sampling, and improved geocenter sensitivity. In this case, the network shift approach is employed to calculate GCCs. Focusing on precise determination of global geodetic parameters using GPS-SLR space ties onboard three LEO satellites of the Swarm mission. To optimize performance, GPS and SLR techniques are directly combined at the observation level. Three sets of observations including ground-based GPS, Swarm-borne GPS, and SLR-to-Swarm data were processed using the self-developed GSTAR software over the period 2019–2023.

Figure 3 presents the daily formal errors of GCC estimates derived from the GPS-only, GPS+LEO, and GPS+LEO+SLR solutions. Overall, the formal errors of the GCC X and Y components are approximately half those of the GCC Z component. Compared to the GPS-only solution, the GPS+LEO solution reduces GCC formal errors by 46.5%, 48.4%, and 36.7% for the X, Y, and Z components, respectively, indicating that Swarm-borne GPS observations significantly enhance the reliability of GCC estimates. This improvement is primarily attributed to enhanced geocenter sensitivity and to rapidly varying observational geometry from LEO satellites. Compared to the GPS+LEO solution, GPS+LEO+SLR solution further improvements are achieved with formal errors reduced by 13.5%, 12.6%, and 0.5% for the X, Y, and Z components, respectively. Given the large discrepancy in observation volume (GPS vs. SLR), such improvement, particularly for X and Y components, is still substantial. This result confirms that unambiguous SLR range measurements outperform GNSS phase measurements for certain geodetic parameters. Additionally, incorporating SLR-to-Swarm observations further mitigated the  $\beta$ -angle dependence of the formal errors of GCC X/Y components (reducing errors by 12.6%–13.5%), and improved the consistency between GCC estimates and external SLR-based solutions.

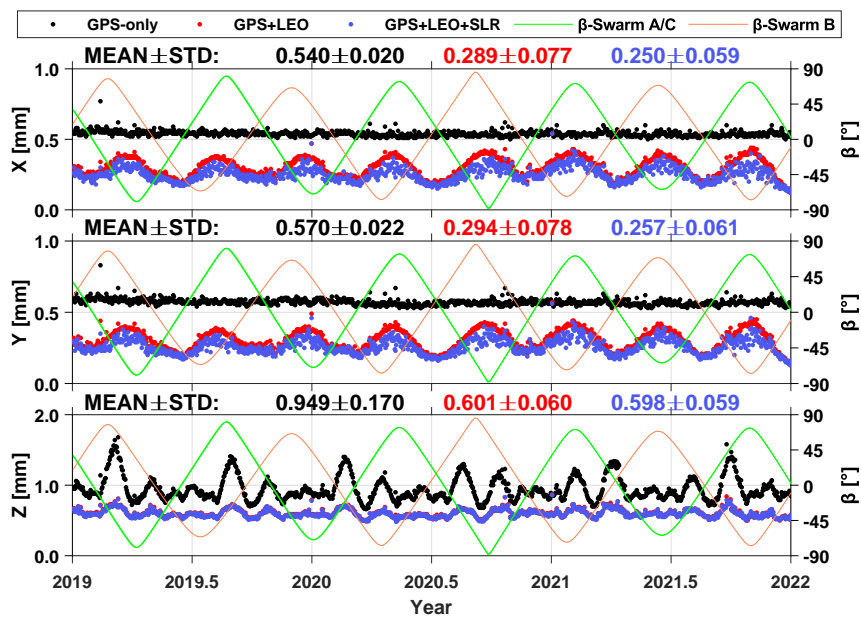

**Figure 3:** Formal errors of GCC estimates for the X (top), Y (middle), and Z (bottom) components. The green curve indicates the Sun elevation angles ( $\beta$ ) for the orbital planes of Swarm A/C, and the red curve indicates that of Swarm B

Figure 4 presents the formal errors of pole coordinates and LOD estimates derived from the GPS-only, GPS+LEO, and GPS+LEO+SLR solutions. Compared to the GPS-only solution, the GPS+LEO solution reduced ERP formal errors by 31.5% (LOD) and 34.3%-40.2% (pole coordinates). Subsequent inclusion of SLR-to-Swarm observations yields only marginal improvements in ERP formal errors. This may be attributed to two factors: (1) Swarm-borne GPS observations already reduce ERP estimation errors to a low level; and (2) SLR-to-Swarm observations remain extremely sparse compared to continuous GPS data. In general, the impact Swarm-borne GPS observations on ERP estimates is mixed. Although Swarm-borne GPS observations improve the consistency with the IERS-20-C04 product for the Y-pole coordinate and LOD, they increase the differences for the X-pole coordinate. SLR-to-Swarm observations are one-way range measurements from individual SLR stations to Swarm satellites. Their absolute ranging capability and high geocenter sensitivity make them effective for direct and accurate estimation of geocenter motion. As a result, SLR-to-LEO observations have greatly improved GCC estimates. However, this absolute ranging property of SLR makes it insensitive to Earth rotation.

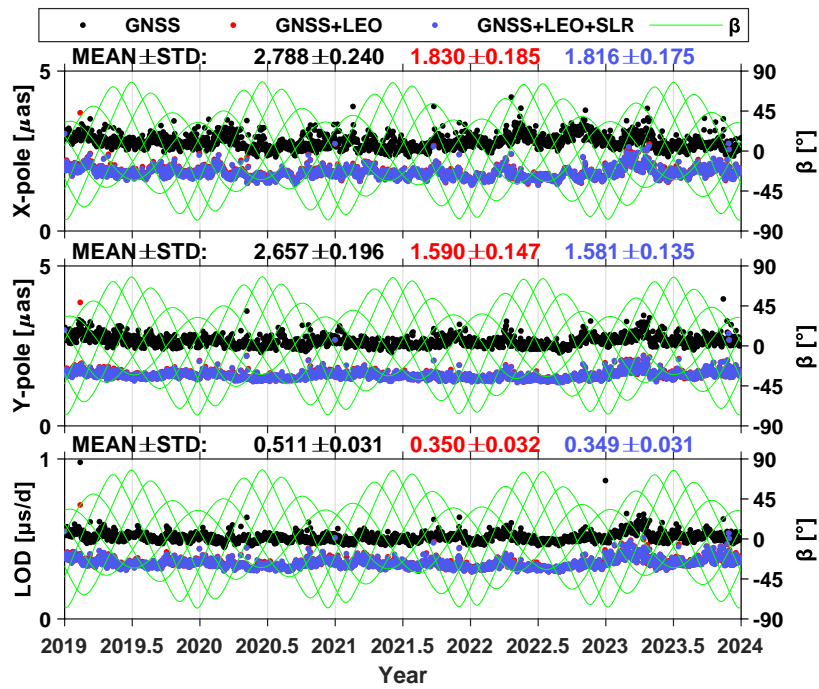


Figure 4: Formal errors of pole coordinates and LOD. The green curves denote the Sun elevation angles above GPS orbital planes ( $\beta$ )

---

## References

- Liu J and Ge M. PANDA software and its preliminary result of positioning and orbit determination. *Wuhan University Journal of Natural Sciences*, 8(2):603-609, 2003.
- Shi C., Zhao Q, Geng J, Lou Y, Ge M, and Liu J. Recent development of PANDA software in GNSS data processing. In: *Proceeding of the Society of Photographic Instrumentation Engineers*, 7285, 72851S, 2008. doi: 10.1117/12.816261.
- Blewitt, G. Self-consistency in reference frames, geocenter definition, and surface loading of the solid Earth. *Journal of Geophysical Research: Solid Earth*, 108(B2). doi: <https://doi.org/10.1029/2002jb002082>, 2003.
- Dong, D, Dickey, J. O, Chao, Y, and Cheng, M. K. Geocenter variations caused by atmosphere, ocean and surface ground water. *Geophysical Research Letters*, 24(15), 1867-1870. doi: <https://doi.org/10.1029/97gl01849>, 1997.
- Dong, D, Fang, P, Bock, Y, Cheng, M. K, and Miyazaki, S. Anatomy of apparent seasonal variations from GPS-derived site position time series. *Journal of Geophysical Research: Solid Earth*, 107(B4), ETG 9-1-ETG 9-16. doi: <https://doi.org/10.1029/2001jb000573>, 2002.
- Niu, Y, Wei, N, Li, M, Rebischung, P, Shi, C, and Chen, G. Quantifying discrepancies in the three-dimensional seasonal variations between IGS station positions and load models. *Journal of Geodesy*, 96(4). doi: <https://doi.org/10.1007/s00190-022-01618-9>, 2022.
- Rebischung, P, Altamimi, Z, Métivier, L, Collilieux, X, Gobron, K, and Chanard, K. Analysis of the IGS contribution to ITRF2020. *Journal of Geodesy*, 98(6), 49. doi: <https://doi.org/https://doi.org/10.1007/s00190-024-01870-1>, 2024.
- Wei, N, Zhou, Y, Shi, C, Xu, X, Rebischung, P, and Liu, J. Toward a refined estimation of geocenter motion from GNSS displacements: Mitigating thermoelastic deformation and systematic errors. *Journal of Geophysical Research: Solid Earth*, 130(7), e2024JB028967, 2025.
- Zhou, Y, Wei, N, and Li, Y. (2025). Comparative analysis of the seasonal and intra-seasonal geocenter motion derived from GNSS displacements: IGS Repro3 and Repro2. *Advances in Space Research*, 76(3), 1355-1367. doi: <https://doi.org/10.1016/j.asr.2025.05.040>, 2025.
- Fan L, Li B, Guo S, Zhao J, Wang X, and Shi C. Global geodetic parameter determination using GPS-SLR space ties onboard LEO satellites. *GPS Solutions* 30(1). doi: <https://doi.org/10.1007/s10291-026-02021-z>, 2026.



# EUREF Permanent Network Regional Network Associate Analysis Centre Technical Report 2025

C. Bruyninx<sup>1</sup>, A. Kenyeres<sup>2</sup>, J. Legrand<sup>1</sup>, T. Liwosz<sup>3</sup>,  
R. Pacione<sup>4</sup>, W. Söhne<sup>5</sup>, C. Völksen<sup>6</sup>

<sup>1</sup> Royal Observatory of Belgium (ROB), Av. Circulaire, B-1180 Brussels, Belgium  
E-mail: [C.Bruyninx@oma.be](mailto:C.Bruyninx@oma.be)

<sup>2</sup> LTK Satellite Geodetic Observatory, Budapest, Hungary

<sup>3</sup> Warsaw University of Technology (WUT), Warsaw, Poland

<sup>4</sup> E-GEOS Centro di Geodesia Spaziale (ASI/CGS), Matera, Italy

<sup>5</sup> Federal Agency for Cartography and Geodesy (BKG), Frankfurt am Main, Germany

<sup>6</sup> Bavarian Academy of Sciences and Humanities, Munich, Germany

## 1 Introduction

The International Association of Geodesy (IAG) Regional Reference Frame Sub-commission for Europe, EUREF, defines, maintains, and provides access to the European Terrestrial Reference System (ETRS89; [Altamimi and Collilieux, 2024](#)). This is realized through the EUREF Permanent GNSS Network (EPN). EPN observation data, as well as precise station coordinates and zenith total delay (ZTD) parameters for all EPN stations, are publicly available.

EUREF also coordinates scientific activities related to the future evolution of ETRS89, including the ETRS89 Study Group, which investigates the strengths and weaknesses of alternatives to ETRS89.

EUREF cooperates closely with the International GNSS Service (IGS). EUREF members actively contribute to the IGS through participation in, for example, the IGS Governing Board, the Reference Frame Committee, the RINEX Committee, the Real-Time Committee, the Antenna Committee, the Troposphere Committee, the Infrastructure Committee, and the Multi-GNSS Pilot Project.

This paper provides an overview of the main changes in the EPN during the year 2025.

## 2 EPN Central Bureau


The EPN Central Bureau (CB, <https://epncb.oma.be>), managed by the Royal Observatory of Belgium (ROB), continued its operational oversight of the EPN network in 2025, with a focus on key station performance metrics such as data availability, metadata accuracy, and data quality (Bruyninx et al., 2019). Ten new GNSS stations were integrated into the EPN in 2025 (highlighted in green in Figure 1): two in France (INGP00FRA in Feb. and AAER00FRA in May), two in G.-D. Luxemburg (TROS00LUX and ECH200LUX in April), two in Romania (FOCS00ROU and MURE00ROU in Nov.), one in Andorra (PCAR00AND in Sept.), Cyprus (ASGA00CYP in April), Italy (PAD100ITA in July), and Germany (WT2100DEU in Nov.). Detailed information on all stations is available from the EPN CB. During the same period, three stations were decommissioned: BACA00ROU, IGNF00FRA, PADO00ITA.

Additionally, the Open Data Portal (<https://gnss.be/opendataportal.php>) built on top of the EPN Historical Data Centre transitioned from beta to full operational status in 2025. This transition included an update of the GNSS-DCAT-AP schema used by the portal (<https://doi.org/10.5281/zenodo.7777568>).

To further support EUREF's commitment to promoting FAIR (Findable, Accessible, Interoperable, Reusable) data practices, the number of EPN stations with assigned Digital Object Identifiers (DOI) increased significantly in 2025. Approximately 230 EPN stations now have DOI-referenced datasets, searchable via the M<sup>3</sup>G system (<https://gnss-metadata.eu>), enhancing data visibility, citation, and recognition for data providers. This is an increase of more than 50% compared to 2024. To guarantee compliance with international standards, EUREF applied the recommendations from the GGOS Committee on Digital Object Identifiers (DOIs) for Geodetic Data Sets issued in 2025.

Following Resolution No. 1 of the 2025 EUREF Symposium in Covilhã (Portugal), the EPN station guidelines were updated in September 2025 to reflect that all EPN stations will, by default, be included in the GNSS network of the European Plate Observing System (EPOS). In practice, ROB will gradually make all EPN station metadata from M<sup>3</sup>G and EPN RINEX data from the EPN Historical Data Centre discoverable within EPOS starting in 2026. The updated station guidelines also include revisited recommendations for the formats to be used when providing data to EUREF.

The number of EPN stations providing real-time data had a slight increase in 2025. By the end of 2025, 211 EPN stations were providing real-time data, with an additional nine stations experiencing extended outages in the past. The EPN Central Bureau monitors the availability and latency of the real-time data streams at the three EPN broadcasters, located at ASI, BKG and ROB. Detailed status updates are available from [https://epncb.oma.be/\\_networkdata/data\\_access/real\\_time/status.php](https://epncb.oma.be/_networkdata/data_access/real_time/status.php) while metadata monitoring can be accessed at [https://epncb.oma.be/\\_networkdata/data\\_access/real\\_time/metadata\\_monitoring.php](https://epncb.oma.be/_networkdata/data_access/real_time/metadata_monitoring.php). A total of 220 data streams are

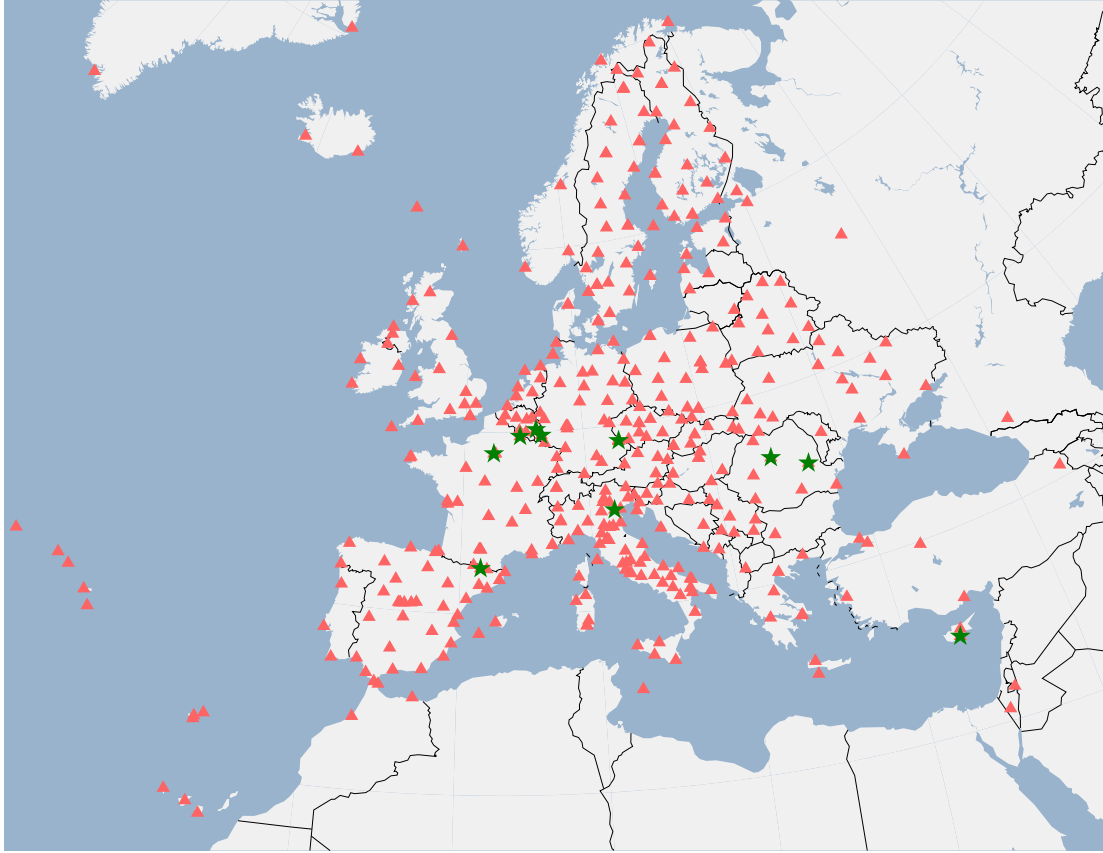

**Figure 1:** New GNSS stations (in green) integrated in the EPN in 2025.

monitored operationally, with 94% of the real-time data available across all three EPN casters.

Additionally, the EPN real-time products `SSRA02IGS0_EUREF` and `SSRA03IGS0_EUREF`, along with the broadcast ephemerides `BCEP00BKG0`, are accessible from the EPN casters.

## 3 Data Products

### 3.1 Positions

The EPN Analysis Centres (ACs) operationally process GNSS observations collected at EPN stations. In 2025, all 17 ACs (Table 1) were providing final daily coordinate solutions of their subnetworks. Twelve ACs were also providing rapid daily solutions, and three ACs were providing near-real-time solutions. All AC solutions were combined by the Analysis

Centre Coordinator (ACC). Details on the various combinations performed by the ACC are given on the ACC website (<http://www.epnacc.wat.edu.pl/epnacc/final/>). In 2025, 7 of 10 new EPN stations mentioned in section 2 (AAER00FRA, ASGA00CYP, ECH200LUX, IGNP00FRA, PAD100ITA, PCAR00AND, and TROS00LUX) were successfully included in the EPN combined coordinate solutions. The three remaining stations (FOCS00ROU, MURE00ROU, WT2100DEU) were incorporated into the EPN in November 2025, and the first EPN combined solutions in which these stations will be included will be released in January 2026.

On February 2, 2025 (start of GPS week 2352), the reference frame to which the EPN combined coordinate solutions are aligned was changed from IGS20 to IGB20. The new reference frame includes 24 additional EPN reference stations (62 in IGB20 vs. 38 in IGS20).

In October 2025, the EPN operational combined solutions for weeks 2238-2313 (27 November 2022 to 11 May 2024) were recombined to ensure better consistency with subsequent solutions. The new solutions are based on all 17 AC solutions (including previously missing solutions from two ACs) and incorporate updated solutions from several ACs.

### 3.2 Troposphere

The EPN ACs operationally submit to EUREF Zenith Total Delay (ZTD) parameters and horizontal gradients estimated for each EPN stations included in their subnetwork. In 2025, 17 ACs were providing final daily troposphere solutions. In addition, 10 ACs were providing rapid troposphere solutions. In 2025, 7 of the 10 new EPN stations (AAER00FRA, ASGA00CYP, ECH200LUX, IGNP00FRA, PAD100ITA, PCAR00AND, and TROS00LUX) have been successfully included in the individual and combined troposphere solutions.

For each EPN station included in the combined solution, Integrated Water Vapour (IWV) is given along with ZTD. Tropospheric products are disseminated in SINEX\_TRO v2.0 format and are available in the EUREF product directory at the BKG and BEV data centers.


The EPN CB shows on [https://epncb.oma.be/\\_productsservices/troposphere/mean\\_zpd\\_biases.php](https://epncb.oma.be/_productsservices/troposphere/mean_zpd_biases.php) for each AC the weekly mean bias (top) and the related standard deviation (bottom) of its solutions with respect to the combined solution. Gross errors (i.e. ZTD with formal standard deviation > 15 mm) and outliers, detected during the combination process, are removed thus not affecting the combined value. The time series is based on EPN-Repro2 solutions (GPS week 834 until 1824) and on operational solutions using IGS14 standards until GPS week 2237 and IGS20 standards afterwards. Due to these changes, the time series is not homogeneous, and it will be replaced by EPN-Repro3 products (January 1996 - November 2022). Thanks to the availability of the EPN Repro3 site coordinate combined product, the last months of 2025 have been devoted to the

**Table 1:** EPN Analysis Centres characteristics: provided solutions (W – final weekly, D – final daily, R – rapid daily, N – near real-time, E03 – repro3), the number of analysed GNSS stations (in brackets: number of stations added/excluded in 2024), used software (BSW – Bernese GNSS Software (Dach et al., 2015), GG – GAMIT/GLOBK), used GNSS observations (G – GPS, R – GLONASS, E – Galileo).

AC	Analysis Centre Description	Solutions	# sites	Software	GNSS
ASI	Centro di Geodesia Spaziale G. Colombo, Italy	W,D,R	122 (3/1)	GipsyX-2.1	GRE
BEK	Bavarian Academy of Sciences & Humanities, Germany	W,D,R,E03	144 (5/1)	BSW 5.4	GRE
BEV	Federal Office of Metrology and Surveying, Austria	W,D	172 (0/2)	BSW 5.4	GRE
BKG	Bundesamt für Kartographie und Geodäsie, Germany	W,D,R,E03	159 (4/1)	BSW 5.5	GRE
COD	Center for Orbit Determination in Europe, Switzerland	W,D	39 (0/0)	BSW 5.5	GRE
GFZ	GeoForschungsZentrum, Germany	W,D,E03	111 (1/0)	EPOS.P8	GRE
IGE	Instituto Geografico Nacional, Spain	W,D,R,E03	100 (3/1)	BSW 5.4	GRE
IGN	Institut Géographique National de L'information Geographique et Forestière, France	W,D,E03	63 (4/1)	BSW 5.4	GRE
LPT	Federal Office of Topography swisstopo, Switzerland	W,D,R,N	60 (1/1)	BSW 5.5	GRE
MUT	Military University of Technology, Poland	D,R,E03	155 (0/1)	GG 10.71	GE
NKG	Nordic Geodetic Commission, Lantmäteriet, Sweden	W,D,R,N,E03	108 (0/0)	BSW 5.4	GRE
RGA	Republic Geodetic Authority, Serbia	W,D	71 (2/2)	BSW 5.4	GRE
ROB	Royal Observatory of Belgium, Belgium	D,R,E03	115 (5/1)	BSW 5.4	GRE
SGO	Lechner Knowledge Center, Hungary	W,D,R,E03	68 (2/1)	BSW 5.4	GRE
SUT	Slovak University of Technology, Slovakia	D,R,N,E03	96 (2/0)	BSW 5.4	GRE
UPA	University of Padova, Italy	W,D,R,E03	117 (3/2)	BSW 5.4	GRE
WUT	Warsaw University of Technology, Poland	W,D,R,E03	155 (1/0)	BSW 5.4	GRE

preparatory phase of EPN-Repro3 tropospheric combination.

Ten EPN ACs are delivering rapid troposphere estimates obtained as a by-product of the rapid site position processing. These rapid solutions are the input for a rapid operational troposphere combination available with a latency of 22 hours after the end of observations of the analyzed day. Because of the distributed processing of the EPN stations, about 200 stations are included in the rapid combination disseminated in SINEX\_TRO v2.0 format in the EUREF product directory at the BKG and BEV data centres. On a weekly basis the agreement between the final and rapid combination is in the range of  $[1; 2]mm$  for the standard deviation and  $[-3; 0]mm$  for the bias.

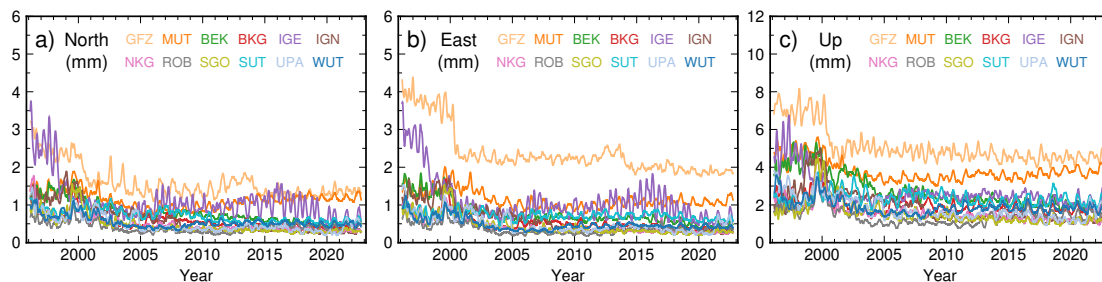


**Figure 2:** Mean RMS values of daily station position residuals between each AC solution and combined solution in EPN Reprocessing 3 project. RMS values presented for north (a), east (b) and vertical (c) components. The RMS values were smoothed in 14-day interval.

### 3.3 Third EPN reprocessing

The third EPN reprocessing (EPN-Repro3) reached a major milestone in 2025 with the completion of the analysis phase by twelve EPN ACs (see also Table 1). They successfully reprocessed GNSS data spanning from 1996 to 2022. To ensure the highest level of robustness and uniformity, the reprocessing followed a coordinated strategy aligned with IGS repro3 standards and utilized antenna calibrations consistent with the IGS20 reference frame. The processing design ensured that each station was analyzed independently by at least three different ACs, allowing for rigorous cross-validation. Beyond coordinates, the EPN-Repro3 ACs also estimated new troposphere parameters from 1996 onwards, which are currently being integrated for meteorological and climate applications.

In August 2025, based on the AC’s Repro3 solutions, the EPN ACC completed the generation of combined Repro3 position solutions covering the period 1996-2022. The analysis and combination of the AC solutions were performed in two basic steps: (1) stacking and cleaning of individual AC solutions, and (2) combination of cleaned AC solutions into common daily solutions including all EPN stations. The mean daily RMS values of station position residuals between each AC daily solution and the combined solution are presented in Figure 2. The EPN-Repro3 combined products consist of daily and weekly coordinate solutions aligned to the IGS20 reference frame in SINEX format, along with accompanying combination reports in text format and new reports in YAML format. The products are available at the EPN data centers.

Based on these results, the final product, a new reference frame solution with the most accurate and up-to-date positions and velocities, is currently being finalized by the EUREF Reference Frame Coordinator and it is targeted for release at the beginning of 2026. It combines combined EPN-Repro3 daily position solutions (January 1996 – November 2022) with EPN operational daily solutions (November 2022 – June 2025). The multi-year solution is computed with CATREF (Altamimi et al., 2007) and expressed in IGc20 (IGSMail #8634) using minimal constraints on 50 reference stations. Outliers, position

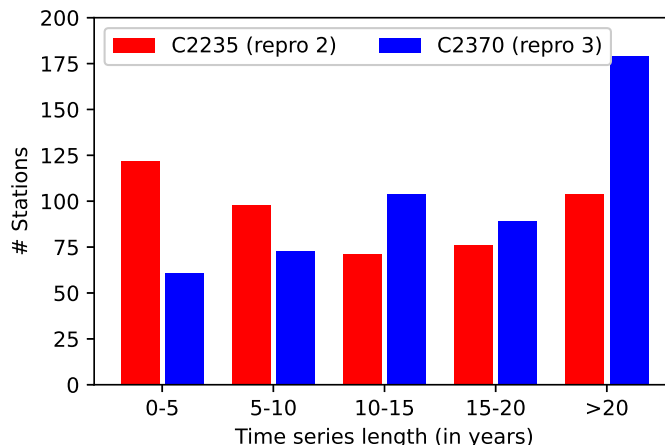

**Figure 3:** Comparison of time series length (in years) between the C2235 solution which was EPN-repro2 based and the C2370 which is EPN-repro3 based.

discontinuities, and velocity changes have been corrected, and harmonization with the global IGS solution ensures consistency with the global frame.

The retrieval of additional historical EPN data increased the dataset by 16% between 1996 and 2023, significantly extending many station time series and reducing by half the number of stations with fewer than five years of observations (see Figure 3). These improvements strengthen the reliability of the estimated velocities.

The carefully aligned analysis strategy ensured a smooth transition between EPN-Repro3 and operational products, with no visible discontinuities in residual RMS, transformation parameters, or station position time series. In addition, the new solution shows excellent agreement with IGC20, with 90% of stations matching within 4 mm horizontally and 10 mm vertically for positions, and within 0.25 mm/yr horizontally and 0.75 mm/yr vertically for velocities. These results highlight the robustness of the new solution and its suitability as the densification of ITRF2020 in Europe in order to maintain the ETRS89.

## References

- Altamimi Z. and X. Collilieux EUREF Technical Note 1: Relationship and Transformation between the International and the European Terrestrial Reference Systems, March 2024, <http://etrs89.ensg.ign.fr/pub/EUREF-TN-1-Mar-04-2024.pdf>
- Altamimi Z., P. Sillard, and C. Boucher. CATREF software: Combination and analysis of terrestrial reference frames. LAREG Technical, Institut Géographique National, Paris, France, 2007.

- Bruyninx, C., J. Legrand, A. Fabian, and E. Pottiaux. GNSS metadata and data validation in the EUREF Permanent Network. *GPS Solutions*, 23:106, 2019. <https://doi.org/10.1007/s10291-019-0880-9A>.
- Bruyninx, C., S. De Bodt, A. Fabian, J. Legrand, A. Miglio, P. Oset Garcia, I. Van Nieuwerburgh, ROB-GNSS/GNSS-DCAT-AP: V0.4 Zenodo, 2025 <https://doi.org/10.5281/zenodo.16610371>
- Dach, R., S. Lutz, P. Walser, and P. Fridez (eds.). *Bernese GNSS Software Version 5.2 User manual*, Astronomical Institute of University of Bern, Bern, Switzerland, 2015. Bern Open Publishing. 2015 doi: <https://doi.org/10.7892/boris.72297>; ISBN: 978-3-906813-05-9
- K. Elger, A. Miglio, M. Bradke, R. Bagwell, D. Angermann, E. D’Anastasio, Y. Bock, S. Bonvalot, R. Botha, E. Bradshaw, E., C. Bruyninx, D. Carrion, G. L. Coetzer, F. Coloma, P. Fridez, E. S. Ince, P. Lamothe, V. Navarro, M. Reguzzoni, J. Riley, D. Roman, R. Ruddick, L. Soudarin, D. Thaller, Y. Yokota (2025). *GGOS Committee on Digital Object Identifiers (DOIs) for Geodetic Data Sets, Metadata recommendations for geodetic data: GNSS (1.0)*. Zenodo. doi: <https://doi.org/10.5281/zenodo.16992829>
- Legrand J. *EPN multi-year position and velocity solution CWWWW*, Available from Royal Observatory of Belgium, 2023 <https://doi.org/10.24414/ROB-EUREF-CWWWW>

# SIRGAS-CON Regional Reference Frame. Technical Report 2025

JA. Tarrío<sup>1</sup>, C. Cáceres<sup>2</sup>, V. Mackern<sup>3</sup>, C. Cunha Santos da Silva<sup>4</sup>,  
N. Ribas Júnior<sup>4</sup>, M. Alexandre de Abreu<sup>4</sup>, L. Sánchez<sup>5</sup>

<sup>1</sup> USC Geodetic Processing and Analysis Center, University of Santiago of Chile (USACH)  
Enrique Kirberg 03, Estación Central

E-mail: [jose.tarrio@usach.cl](mailto:jose.tarrio@usach.cl)

<sup>2</sup> USC Geodetic Processing and Analysis Center, University of Santiago of Chile (USACH)

<sup>3</sup> CIMA, UNCuyo, UMaza, CONICET


<sup>4</sup> Instituto Brasileiro de Geografia e Estatística (IBGE), Brazil

<sup>5</sup> Deutsches Geodätisches Forschungsinstitut der  
Technischen Universität München (DGFI-TUM), Germany

## 1 Introduction

The Geodetic Reference System for the Americas (SIRGAS) comprises a network of continuously operating GNSS stations distributed across the American continent, known as SIRGAS-CON (SIRGAS Continuously Operating Network). This network represents the densification of the International Terrestrial Reference Frame (ITRF) in the Americas and is processed weekly to determine station coordinates aligned with the current ITRF realization. At present, SIRGAS-CON comprises 475 stations, some of which are part of the International GNSS Service (IGS) network. In contrast, the remaining stations are part of the national reference networks of the SIRGAS member countries.

This report focuses on the components of the SIRGAS reference frame, the current progress and activities related to its maintenance and development, and the products and tools derived from the computed solutions. These activities support the approach of strengthening multi-GNSS technical capabilities through the weekly processing and combination of SIRGAS-CON, as well as the dissemination of SIRGAS through voluntary continental participation by member countries.

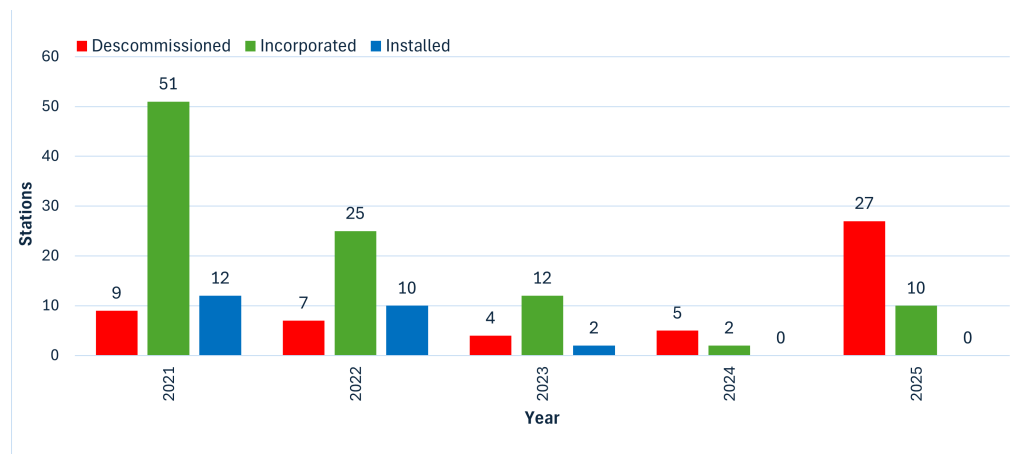

**Figure 1:** Condition of stations in the SIRGAS-CON network in the years 2021 to 2025.

## 2 Geodetic Infrastructure: SIRGAS Continuously Operating Network (SIRGAS-CON)

SIRGAS-CON is the current and third realization of SIRGAS and comprises a network of continuously operating GNSS stations distributed across Latin America. It currently contains 475 stations, of which 110 are IGS (International GNSS Service) stations, while the remaining 365 are part of regional reference frames. Of the total number of stations composing SIRGAS-CON, 12 were incorporated into the network during the 2024–2025 period (Figure 1), while 32 stations were decommissioned due to limited or null data continuity.

To ensure the proper integration of stations from regional reference frames into the continental reference frame, the SIRGAS-CON network is subdivided into two main components (Figure 2):

- The core network (SIRGAS-C) corresponds to the primary densification of the ITRF in Latin America, providing homogeneous continental coverage through stations located at stable sites, thereby ensuring high long-term stability of the reference frame.
- The national networks (SIRGAS-N) complement the densification of the core network, facilitating access to the SIRGAS-CON reference frame at national and local levels.

Both the SIRGAS-C and SIRGAS-N networks share equivalent characteristics and quality standards. Furthermore, each station is processed independently by three analysis centers, contributing to redundancy and quality control of the resulting solutions.

The operation of the SIRGAS network is based on three key pillars:

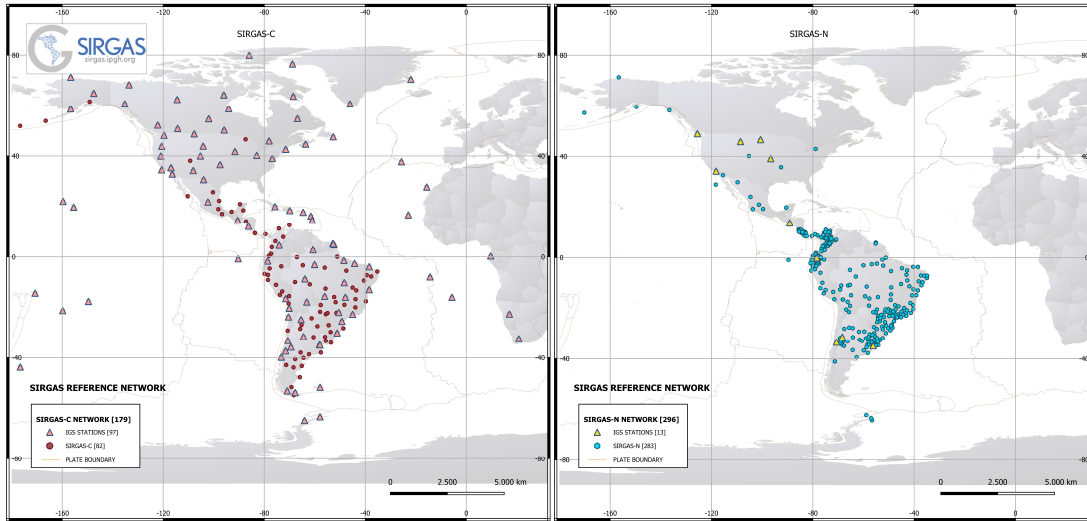


Figure 2: SIRGAS-C and SIRGAS-N.

- The voluntary contribution of more than 50 organizations that operate permanent GNSS stations across the American continent and provide the observational data required for the weekly processing of the network.
- The progressive increase in multi-GNSS capability at the regional level, where currently 90% of stations provide GLONASS observations, 49% provide GALILEO observations, and 38% provide BeiDou observations.
- Redundancy is ensured through the independent processing of each station by three analysis centers, enhancing the robustness and reliability of the weekly solutions.

Operational management is carried out in coordination with the 13 data centers, in accordance with the standards established in SIRGAS Guideline 1 (Tarrío et al., 2025).

### 3 SIRGAS-CON ANALYSIS CENTERS: Guidelines and Standards Processing

SIRGAS currently operates twelve analysis centers. Two of these centers, UCR (Universidad de Costa Rica) and IGM-Bol (Instituto Geográfico Militar de Bolivia), operated as experimental processing centers during the 2024–2025 period, and their solutions were officially incorporated into the SIRGAS solution combination starting with GPS week 2374. Of the total number of analysis centers, eight use the Bernese GNSS Software, version 5.4 (Dach and Arnold, 2025) for weekly processing, while the remaining four use

GAMIT/GLOBK, version 10.71 (Floyd et al., 2025; Herring et al., 2018).

Table 1 summarizes the processing centers that contribute to the SIRGAS solutions.

**Table 1:** Analysis centers.

Analysis Centers	Software	Processing Stations	Operative From	Abbreviation
IBGE: Instituto Brasileiro de Geografia e Estatística (Brasil).	BSW 5.4	179	2008-08-31	IBG
IGAC: Instituto Geográfico Agustín Codazzi (Colombia).	BSW 5.4	79	2008-08-31	IGA
IGM-Uy: Instituto Geográfico Militar de Uruguay.	BSW 5.4	103	2010-01-01	URY
CEPGE: Centro de Procesamiento de Datos GNSS del Ecuador, Instituto Geográfico Militar (Ecuador)	BSW 5.4	88	2010-01-01	ECU
IGN-Ar: Instituto Geográfico Nacional de Argentina.	GG 10.71	230	2011-01-01	GNA
INEGI: Instituto Nacional de Estadística y Geografía (México).	GG 10.71	51	2011-01-01	INE
IGM-Cl: Instituto Geográfico Militar de Chile.	BSW 5.4	112	2013-01-01	CHL
USC: Universidad de Santiago de Chile: Centro de Procesamiento y Análisis Geodésico USC (Chile)	BSW 5.4	242	2019-09-15	USC
IGN-Pe: Instituto Geográfico Nacional del Perú.	GG 10.71	105	2022-01-01	PER
IGN-Cr: Instituto Geográfico Nacional de Costa Rica	BSW 5.4	79	2023-01-01	CRI
UCR: Universidad de Costa Rica.	GG 10.71	81	2025-07-06	UCR
IGM-Bol: Instituto Geográfico Militar de Bolivia.	BSW 5.4	72	2025-07-06	BOL

**Table 2:** Combination centers.

Combination Centers	Software
IBGE: Instituto Brasileiro de Geografia e Estatística (Brasil).	BSW 5.4
DGFI-TUM: Deutsches Geodätisches Forschungsinstitut at the Technical University of Munich, Germany	BSW 5.4

The processing of the SIRGAS-C network has been carried out since GPS week 2295 by the USC Processing Center, while the stations belonging to the SIRGAS-N network are computed by the other SIRGAS Local Processing Centers, which operate under the responsibility of national Latin American organizations. The processing performed by the analysis centers follows international standards for the computation of weekly solutions with flexible constraints. These standards are based on the conventions described by the International Earth Rotation and Reference Systems Service (IERS) (Petit and Luzum, 2010) and on the specific GNSS guidelines defined by IGS (Johnston et al., 2017). Since

GPS week 2347, Galileo system observations have also been included in the solutions. As SIRGAS does not generate Earth orientation parameters nor compute orbit and clock products, its solutions are computed based on the final weekly IGS products, and the positions of all stations are constrained to  $\pm 1$  m in order to produce position solutions with flexible constraints in SINEX format.

### 3.1 Weekly solutions combination


The individual solutions generated by the analysis centers are combined by the SIRGAS combination centers, currently operated by IBGE, which serves as the official combination center, and by DGFI-TUM, which functions as the backup combination center ([SIRGAS, 2011](#)). During this process, the constraints applied to the individual solutions are removed, and each subnetwork is independently aligned to the IGS reference frame using a selected set of reference stations, chosen based on evaluations of their time series and equipment changes to verify their stability. The estimated station positions are compared to identify outliers, and stations exhibiting residuals exceeding  $\pm 10$  mm in the horizontal components (NE) and  $\pm 20$  mm in the vertical component (UP) are excluded. The relative weighting of the individual solutions is determined from the variances obtained after alignment to the IGS reference frame. As a final result, fixed coordinates aligned to IGS and semi-free coordinates with flexible constraints are generated.

### 3.2 Neutral atmosphere

As part of the weekly processing, the SIRGAS Analysis Centers estimate the Zenith Total Delays (ZTD) at an hourly sampling interval, which serve as input for the generation of the official SIRGAS tropospheric products. The SIRGAS Analysis Center for the Neutral Atmosphere, operated at CIMA (Mendoza, Argentina), performs the weekly combination and provides the operational ZTD products in daily SINEX\_TRO files since January 2014, with a latency of 30 days ([Mackern et al., 2020](#)).

## 4 Products and network accuracy

SIRGAS provides weekly coordinates as well as tropospheric products derived from the weekly products generated by each analysis center (Table 3). These products include tropospheric files, weekly station coordinates for the SIRGAS-CON network, SINEX files, and SUM files corresponding to combination reports, the latter containing the numerical values associated with the network's weekly precision. SIRGAS-CON exhibits an internal precision of approximately 1.2 mm (E), 1.2 mm (N), and 3.4 mm (U), and an external precision of approximately 1.2 mm (E), 1.2 mm (N), and 5.1 mm (U).

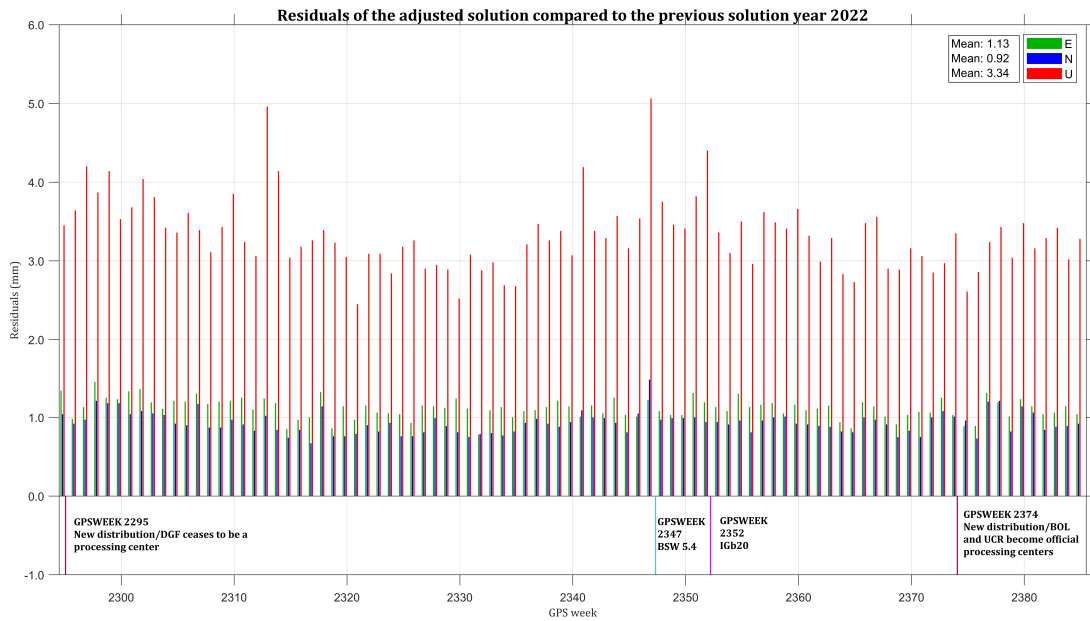

**Figure 3:** Internal Precision, resulting from comparison with the previous solution.

Figures 3 and 4 illustrate the evolution of network precision and highlight key milestones during the 2024/2025 period.

**Table 3:** Products.

File	Description
SIR00PSFIN_YYYYD0Y0000_07D_07D_SOL.SNX	Combined SINEX solution computed by DGFI
IBGWWWS.SNX	Combined SINEX solution computed by IBGE
SIR00PSFIN_YYYYD0Y0000_07D_07D_SUM.SUM	Combination report computed by DGFI
IBGWWWS.SUM	Combination report computed by IBGE
sir25P2392.CRD	Resulting coordinates from the combination computed by DGFI
ibg25P2392.CRD	Resulting coordinates from the combination computed by IBGE
SIR00PSFIN_YYYYD0Y0000_01D_01H_SITENAME_TRO.TRO	Daily tropospheric file per station
CCC00PSFIN_YYYYD0Y0000_07D_07D_SOL.SNX	Weekly SINEX solution of each analysis center

SIRGAS products can be found at <ftp://ftp.sirgas.org/pub/gps/SIRGAS/>

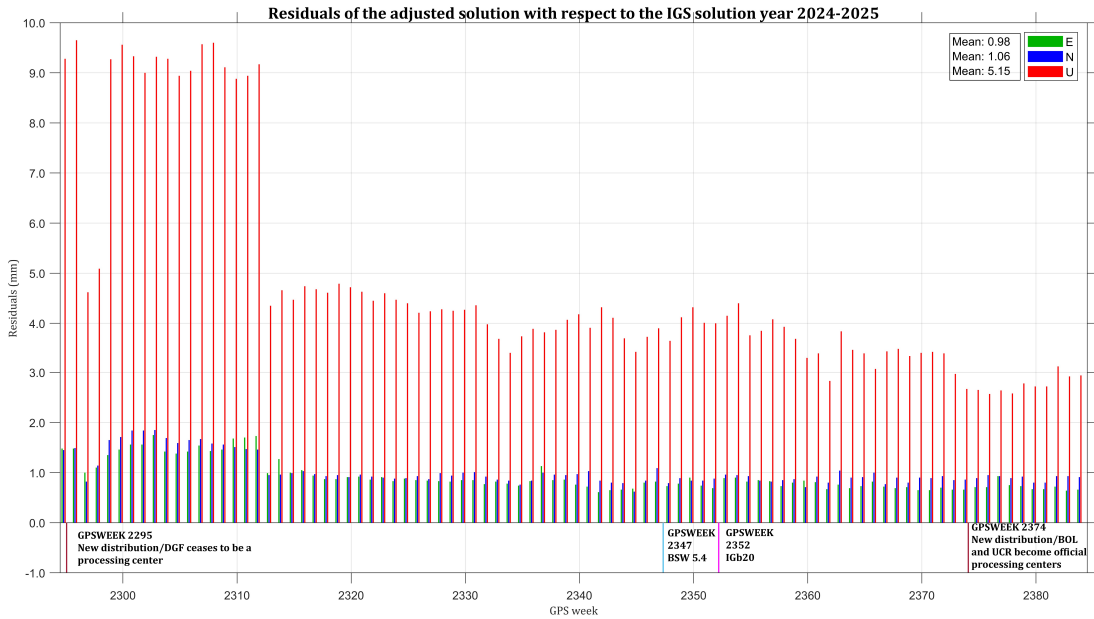


Figure 4: External Precision, resulting from the adjustment made with the IGS stations.

## 5 Operational products

This item highlights the applied research products that are generated from the SIRGAS products.

### 5.1 ADELA for SIRGAS with REPRO2 solutions

The SIRGAS-CON network comprises stations located in areas of high seismic risk (Figure 5). Therefore, and in accordance with Resolution No. 13 (SIRGAS, 2024), SIRGAS promotes the implementation of kinematic reference frames that incorporate a temporal component in their definition, accounting for deformations caused by seismic events. Therefore, SIRGAS provides a velocity model that enables the use of station velocities through a velocity grid known as VEMOS. (Drewes et al., 2025). For its development, VEMOS uses only the station's linear velocity, as accounting for seismic offsets or other geophysical components would entail greater complexity. It is within this complexity, and as a complementary approach, that the deformation model for SIRGAS has been developed (<https://adela.usach.cl/sirgas/>)<sup>1</sup>, based on the stations that comprise the

<sup>1</sup>The username and password are managed internally by WG1

SIRGAS-CON network and using as input the coordinates derived from the REPRO-2 solution (Tarrío et al., 2025). Given the heterogeneous density of CORS stations across the SIRGAS region, ADELA complements Frequent Epoch Reference Frames (FERF) (Bloßfeld et al., 2013; Kehm et al., 2022(@) for the determination of coordinates at passive points (survey marks).

The model developed for SIRGAS is based on the approach implemented for ADELA, which corresponds to a deformation model derived from the analysis of displacements recorded by GNSS stations in Chile from 2009 to 2025, a period marked by major earthquakes such as Maule 2010 and Iquique 2015, among others. The primary objective of the model is to enable the temporal propagation of point coordinates to any reference epoch within the 2009–2025 interval, explicitly accounting for the effects of seismic events in the region during the coordinate computation (Tarrío et al. et al., 2024). ADELA is a complementary deformation model derived from SIRGAS products, and not a regular standard product of the SIRGAS-CON system.

## 5.2 New SIRGAS ZTD products derived from IGS14 homogenization and the inclusion of all historical SIRGAS Stations

In 2024, advances were made in combining ZTD estimates derived from the second SIRGAS reprocessing campaign (REPRO2), covering the period 2002–2013. This reprocessing aimed to obtain homogeneous products aligned with the IGS14/IGb14. In addition, a newly updated set of operational SIRGAS tropospheric products is introduced, incorporating statistical enhancements to the ZTD combination strategy for the period 2014–2024 (1\_OPS). Both datasets include all operational GNSS stations integrated into SIRGAS across the Americas, resulting in ZTD time series for more than 600 sites over 23 years. More than 330 stations provide time series of at least 10 years, supporting climatological applications.

The consistency of the new ZTD products was assessed using IGS tropospheric estimates at 99 stations, yielding excellent agreement, with mean ZTD biases below 1 mm and mean RMSEs below 7 mm. Additional validation against radiosonde-derived ZTD at 73 sites yielded a mean bias of -1.4 mm and a mean standard deviation of 12.9 mm. These results confirm that the new SIRGAS ZTD products are homogeneous and reliable across the continent, providing a high-quality tropospheric dataset spanning more than two decades for future geodetic and atmospheric research in the region.

They are provided in daily files for each station. Their format follows the SINEX\_TRO version 2 specifications (Pacione and Dousa, 2020). Likewise, each file's naming convention adheres to this standard. The products are available on the SIRGAS website in two folders, according to their corresponding data source (1\_OPS: Operational products, and REPR2: Reprocessing products)

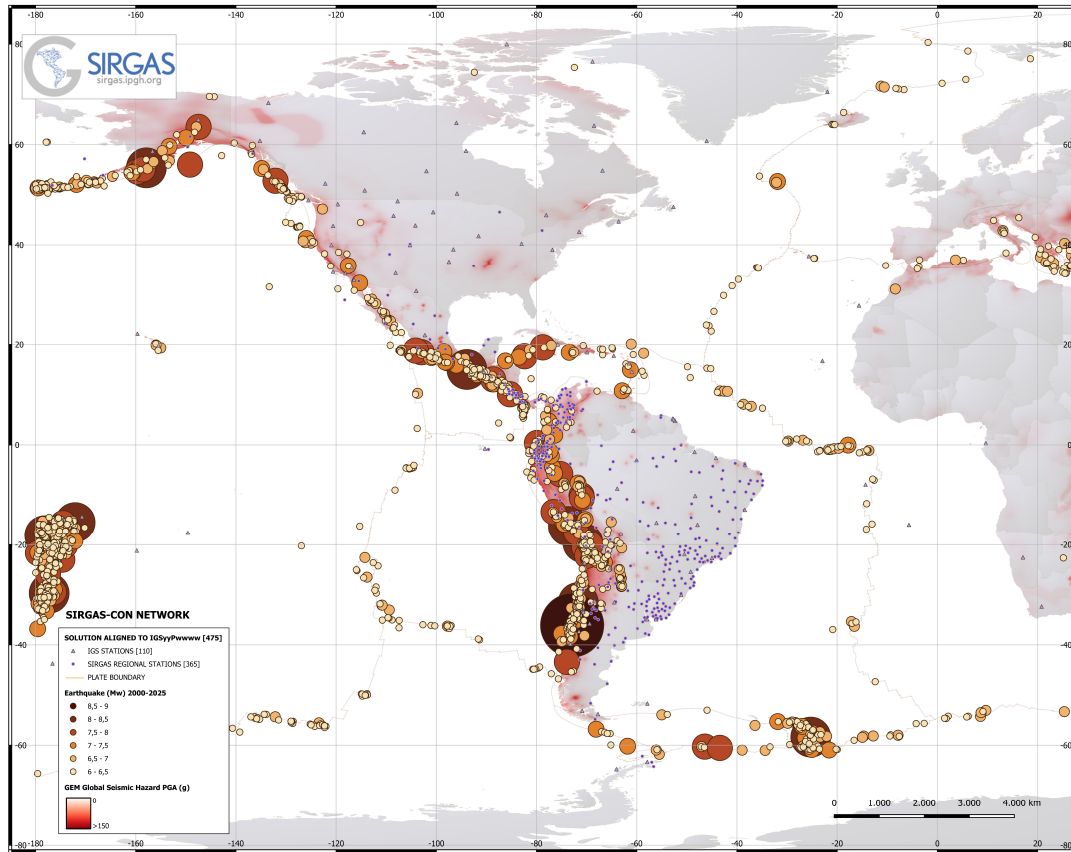


Figure 5: SIRGAS-CON and earthquakes.

## 6 Activities and capacity building

The WG1 (SIRGAS Working Group 1) is responsible for the SIRGAS-CON network and, therefore, is responsible for providing assistance and participating in learning and capacity-building opportunities offered to the national institutions that are members of SIRGAS. Some of the activities carried out during the 2024/2025 period include:

1. Bernese Scientific Software 5.4 Course: “Observación GNSS, posicionamiento, errores, órbitas, modelos utilizados en el procesamiento, técnicas de medición y ajuste de la red”, 2024.
2. Procesamiento estático relativo BSW 5.4, 2024.

3. Update of the SIRGAS Guidelines, January 2025.
4. Virtual School: “Marco de Referencia Terrestre. Monitoreo Geodinámico y Atmosférico 2025”.
5. Procesamiento Avanzado de Datos de Geodesia Espacial con Bernese 5.4: Técnicas GNSS y Modelos No Lineales, 2025. (<https://doi.org/10.60547/USACH/ECWNFP>)
6. Workshop: Network Coordination Guidelines, delivered to colleagues from IBGE on August 25 and 26, 2025.

According to the SIRGAS guidelines update, the following points are highlighted for Guideline 1, related to the coordination of the SIRGAS network: Cessation of operations of the IGS Analysis Center (IGS-RNAAC), Establishment of the Alternative Data Center (CRDA), and Creation of the Experimental Combination Center role. Related to the installation, operation, and registration of SIRGAS-CON stations: Timeframes are established for changes in station status (Active, Inactive, or Removed). Finally, for Guideline 3, which relates to the processing guidelines for SIRGAS-CON processing centers, the obligations of the experimental combination centers are detailed.

## 7 Acknowledgement

Special acknowledgment is extended to all SIRGAS collaborators for their contribution and interest in activities related to SIRGAS, as none of this work would be possible without their support. Likewise, special thanks are extended to the processing centers of IGM Uruguay (URY) and IGN Argentina (GNA) for their contributions to this report.

## References

- Bloßfeld, M., M. Seitz, and D. Angermann (2013). Non-linear station motions in epoch and multi-year reference frames. *Journal of Geodesy* 88:1, 88(1), 45–63. <https://doi.org/10.1007/S00190-013-0668-6>.
- Dach, R. and D. Arnold (2025). Bernese GNSS Software Version 5.4 Tutorial. Astronomical Institute, University of Bern. <https://www.bernese.unibe.ch/docs/TERMINAL.pdf>.
- Drewes, H., M. Seitz, and L. Sánchez (2025). Realisation of the Non-Rotating Terrestrial Reference Frame by an Actual Plate Kinematic and Crustal Deformation Model (APKIM2020). *International Association of Geodesy Symposia*, 157, 53–61. [https://doi.org/10.1007/1345\\_2024\\_276/FIGURES/8](https://doi.org/10.1007/1345_2024_276/FIGURES/8).

- Floyd, M., T. Herring, R. King, and S. McClusky (2025). GAMIT/GLOBK, Release 10.71. <https://geoweb.mit.edu/gg/docs/10.71/relnote/10.71.html>
- Herring, T. A., R. W. King, M. A. Floyd, and S. C. McClusky (2018). Introduction to GAMIT/GLOBK, Release 10.7. <http://geoweb.mit.edu/gg/docs/>.
- Johnston, G., A. Riddell, and G. Hausler (2017). The International GNSS Service. In Springer Handbooks (pp. 967–982). Springer. [https://doi.org/10.1007/978-3-319-42928-1\\_33](https://doi.org/10.1007/978-3-319-42928-1_33).
- Kehm, A., L. Sánchez, M. Bloßfeld, M. Seitz, H. Drewes, D. Angermann, and F. Seitz (2022). Combination Strategy for the Geocentric Realization of Regional Epoch Reference Frames. *Journal of Geophysical Research: Solid Earth* 127(10) (2022). <https://doi.org/10.1029/2021JB023880>
- Mackern, M. V., M. L. Mateo, M. F. Camisay, and P. V. Morichetti (2020). Tropospheric Products from High-Level GNSS Processing in Latin America (pp. 227–240). Springer, Berlin, Heidelberg. [https://doi.org/10.1007/1345\\_2020\\_121](https://doi.org/10.1007/1345_2020_121).
- Pacione, R., and J. Dousa (2020). SINEX\_TRO-Solution (Software/Technique) Independent EXchange Format for TROpospheric and meteorological parameters. [https://files.igs.org/pub/data/format/sinex\\_tro\\_v2.00.pdf](https://files.igs.org/pub/data/format/sinex_tro_v2.00.pdf).
- Petit, G., and Luzum, B. (2010). IERS Conventions (IERS Technical Note; No.36). In IERS Conventions Centre. <https://www.iers.org/IERS/EN/Publications/TechnicalNotes/tn36.html>.
- SIRGAS (2011). Resoluciones\_Recomendaciones\_SIRGAS2011. [https://sirgas.ipgh.org/docs/Boletines/Resoluciones\\_Recomendaciones\\_SIRGAS2011.pdf](https://sirgas.ipgh.org/docs/Boletines/Resoluciones_Recomendaciones_SIRGAS2011.pdf).
- SIRGAS (2024). Resolucion-SIRGAS-2024\_ES. In Simposio SIRGAS 2024. [https://sirgas.ipgh.org/wp-content/uploads/2025/02/Resolucion-SIRGAS-2024\\_ES.pdf](https://sirgas.ipgh.org/wp-content/uploads/2025/02/Resolucion-SIRGAS-2024_ES.pdf).
- Tarrío, J. A., C. Cáceres, A. Da Silva, and S. Alves Costa (2025). GUÍA01 COORDINACIÓN DE LA RED SIRGAS. <https://doi.org/10.60547/USACH/USIUZM>.
- Tarrío, J. A., M. Marten-Allendes, J. Giglio, C. Cáceres, V. Vásquez, and M. Caverlotti (2025). ADELA (Analysis of Deformation beyond Los Andes) Project: Building Resilient Reference Frames in South America’s Seismic Zones. In *Journal of Geodetic Science* (Vol. 12, Number 1). Springer. <https://eventi.unibo.it/iag2025/poster-program-monday-1st>.
- Tarrío Mosquera, J. A., C. Cáceres, V. Vásquez, M. Marten, J. Inzunza, F. Isla, M. Caverlotti, G. Jeldres, R. Urrutia, C. Mardones, and R. Fernandes (2024). Geodetic innovation in Chilean mining: The evolution from static to kinematic reference frame in seismic zones. *Journal of Geodetic Science*. <https://doi.org/10.1515/jogs-2022-0173>.



# Part III

## Data Centers



# Infrastructure Committee Technical Report 2025


M. Bradke<sup>1</sup>, R. Ruddick<sup>2</sup>, D. Maggert<sup>3</sup>,  
W. Söhne<sup>4</sup>

- <sup>1</sup> GFZ Helmholtz Centre for Geosciences, Germany  
E-mail: [markus.bradke@gfz.de](mailto:markus.bradke@gfz.de)
- <sup>2</sup> Geoscience Australia, Australia  
E-mail: [ryan.ruddick@ga.gov.au](mailto:ryan.ruddick@ga.gov.au)
- <sup>3</sup> EarthScope Consortium, United States
- <sup>4</sup> BKG, Germany

## 1 Introduction

The IGS Infrastructure Committee (IC) is a permanent body established to ensure that the data requirements for the highest quality GNSS products are fully satisfied while also anticipating future needs and evolving circumstances. Its principal objective is to ensure that the IGS infrastructure components which collect and distribute the IGS tracking data and information are sustained to meet the needs of main stakeholders, in particular the IGS Analysis Centres, fundamental product coordinators, committees, pilot projects, and working groups.

The IC fulfils this objective by coordinating and overseeing facets of the IGS organisation involved in the collection and distribution of GNSS observational data and information, including network stations and their configurations (instrumentation, monumentation, communications, etc.), and data flow. The IC establishes policies and guidelines, where appropriate, working in close collaboration with all IGS components, as well as with the various agencies that operate GNSS tracking networks. The IC interacts with International Association of Geodesy (IAG) sister services and projects – including the International Earth Rotation and Reference Systems Service (IERS) and the Global Geodetic Observing System (GGOS) – and with other external groups (such as the Radio Technical Commission for Maritime Services (RTCM)) to synchronise with the global, multi-technique geodetic infrastructure.

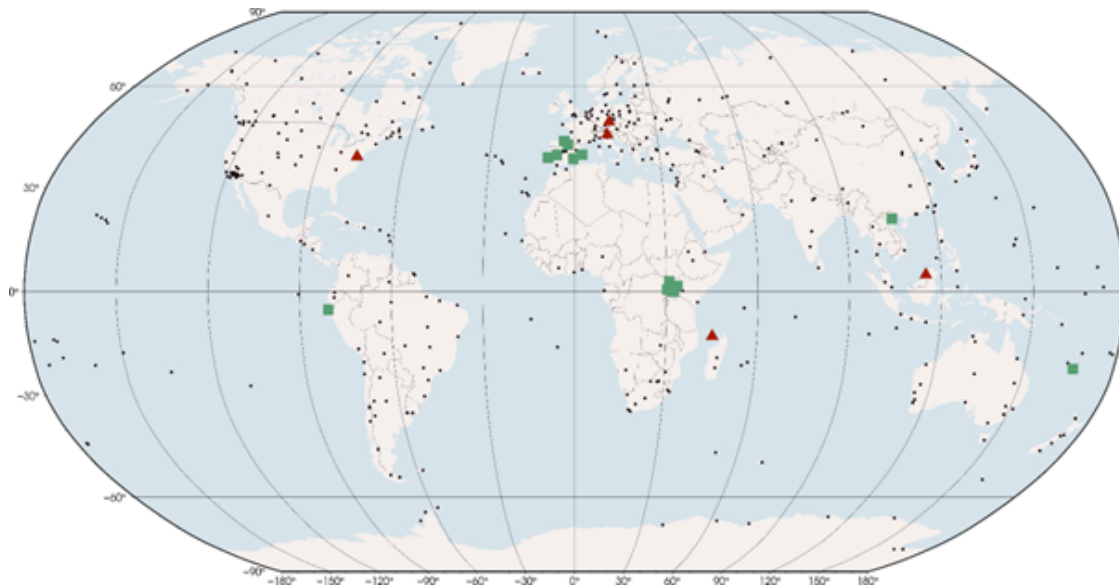

**Figure 1:** Map of the IGS Network in 2025; newly added stations highlighted in green, decommissioned stations highlighted in red

## 2 Members

The Committee is composed of the leadership (2), ex-officio members (11), who hold active roles in other IGS Committees, representative members nominated and accepted by ex-officio members (3), and a representative from each of the active global data centres<sup>1</sup> (6).

As of December 31, 2025, the Committee has a total of 22 active members. The IGS Infrastructure Committee is open to all Associate Members who have an interest in the sustainment and enhancement of the IGS Infrastructure. Non-Appointed members do not have voting rights but are encouraged to actively participate in the Committee.

## 3 Advancements to the IGS Network in 2025

Throughout 2025, the IC actively assisted the Network Coordinator in responding to inquiries from IGS product and data users. The Station Proposal Committee (SPC) added 13 multi-GNSS stations to the network and removed 5 stations by request of the station operators. Figure 1 highlights the newly added and decommissioned stations in a global map, details for each station can be found in Table 1.

---

<sup>1</sup>CDDIS, IGN, ESA, WHU, KASI, SIO

**Table 1:** List of approved and decommissioned Stations in the IGS Network in 2025

Station	Location	Systems	Real-Time	Agency
Approved Stations (13):				
ALAC00ESP	Alicante, Spain	GREC	Yes	IGE
ARUA00UGA	Arua, Uganda	GREC		MLHUD-SMD
CACE00ESP	Caceres, Spain	GREC	Yes	IGE
CANT00ESP	Santander, Spain	GREC	Yes	IGE
CASC00PRT	Cascais, Portugal	GRECS	Yes	DGT
ENTB00UGA	Entebbe, Uganda	GREC		MLHUD-SMD
FPRT00UGA	Fort Portal, Uganda	GREC		MLHUD-SMD
HUMG00VNM	Hanoi, Vietnam	GRE	Yes	GFZ
MALL00ESP	Palma de Mallorca, Spain	GREC	Yes	IGE
NRMG00NCL	Noumea, New Caledonia	GRECIJS	Yes	CNES
PIUR00PER	Piura, Peru	GRECS	Yes	GFZ
RIO100ESP	Logrono, Spain	GRE	Yes	IGE
SRTI00UGA	Soroti, Uganda	GREC		MLHUD-SMD
Decommissioned Stations (5):				
BRUN00BRN	Gadong, Brunei	GRECJ		JAXA
GODZ00USA	Greenbelt, USA	GR		JPL
MAYG00MYT	Dzaoudzi, Mayotte	GRECIS		CNES
PADO00ITA	Padova, Italy	GRECIS		UPAD
WTZS00DEU	Bad Koetzting, Germany	GRECIS		BKG

Legend for system IDs

G: GPS, R: GLONASS, E: Galileo, C: BeiDou, J: QZSS, I: IRNSS/NavIC, S: SBAS

## 4 2025 Activities: Review and Outlook

The IC is actively working towards implementing the recommendations derived from the 2024 IGS Workshop. A summary of these recommendations is provided in Table 2.

In 2023, we published the “Guidelines for Continuously Operating Reference Stations (CORS) in the IGS”<sup>2</sup>, a comprehensive resource designed to support station owners and operators in planning, establishing, and maintaining CORS. As part of our commitment to inclusion, diversity, equity, and accessibility (IDEA), we have made these Guidelines accessible to a broader audience by translating them into multiple languages, including French, Spanish, and German. In 2025, the community added the following languages: Portuguese, Mandarin, Arabic, and Hindi. These translations are now available as web-based documentation on the official IGS GitHub repository<sup>3</sup>.

In conjunction with the CORS Guidelines, we developed the “IGS CORS Management

<sup>2</sup>[https://files.igs.org/pub/resource/guidelines/Guidelines\\_for\\_Continuously\\_Operating\\_Reference\\_Stations\\_in\\_the\\_IGS.pdf](https://files.igs.org/pub/resource/guidelines/Guidelines_for_Continuously_Operating_Reference_Stations_in_the_IGS.pdf)

<sup>3</sup>[https://international-gnss-service.github.io/IGS\\_CORS\\_Guidelines](https://international-gnss-service.github.io/IGS_CORS_Guidelines)

**Table 2:** List of recommendations from the IGS Workshop 2024 and their status

#	Description	Status
1	Encourage IGS station operators to track NavIC for stations within the footprint and analysis centers to analyze the data.	Ongoing
2	Develop a policy for the inclusion and exclusion of stations.	Completed
3	Contribute to the GGOS Data and Information System Committee to ensure the improvement of FAIR GNSS data and metadata.	Ongoing
4	Develop an extensible way to categorize stations by their use for the community.	Blocked
5	Harmonize the code lists within the IGS station metadata.	In Progress
6	Establish a task force on exploring cloud native storage formats.	In Progress
7	Develop a charter for IGS data centers.	Completed
8	Inclusion of more active members of the IC.	Ongoing

Policy”<sup>4</sup>, a clear policy governing the inclusion and exclusion process for stations in the IGS network, aiming to enhance quality, consistency, and user experience.

The GeodesyML task team has transitioned to its new home within the GGOS Committee on Data and Information Systems<sup>5</sup>, marking an exciting new chapter in its evolution. This strategic move enables the team to broaden its scope, supporting multiple geodetic techniques and driving innovation through the development of a next-generation, JSON-LD based schema that will ultimately replace the current XML-based framework.

Furthermore, the IC developed a web-based application to maintain a Controlled Vocabulary for station metadata. The API can be integrated into existing station management platforms (e.g., IGS SLM<sup>6</sup>, EPN M<sup>3</sup>G<sup>7</sup>). The final implementation and deployment of the application is currently blocked due to resource limitations.

As part of our commitment to advancing the concept of a “Global GNSS Archive”, we developed the “Charter for the IGS Data Centres”<sup>8</sup>, a comprehensive collection of mandatory and expected requirements that IGS data centres need to follow.

Additionally, members of the IC aim to explore cloud-based alternatives to RINEX as the storage and access format for GNSS data. This initiative reflects the ongoing efforts to enhance and optimise data storage and access methods in the GNSS community. A dedicated workshop is scheduled for February 2026 hosted in Coimbra, Portugal. The goals

<sup>4</sup>[https://files.igs.org/pub/resource/guidelines/IGS\\_CORS\\_Management\\_Policy.pdf](https://files.igs.org/pub/resource/guidelines/IGS_CORS_Management_Policy.pdf)

<sup>5</sup><https://ggos.org/about/org/bureau/bno/cwg/data-information-systems/>

<sup>6</sup><https://github.com/International-GNSS-Service/SLM>

<sup>7</sup><https://gnss-metadata.eu/landing/m3g>

<sup>8</sup>[https://files.igs.org/pub/resource/working\\_groups/data\\_centers/Charter\\_for\\_International\\_GNSS\\_Service\\_Data\\_Centres.pdf](https://files.igs.org/pub/resource/working_groups/data_centers/Charter_for_International_GNSS_Service_Data_Centres.pdf)

of the workshop are to prepare a draft schema and data model for a cloud-native GNSS format, build a shared understanding of applicable technologies, create a collaboration roadmap, and to draft a white paper to share with the broader community.

A dedicated task team is currently developing clear, community-aligned guidelines for the use of Digital Object Identifiers (DOI) and data licenses, respectively. The documents aim to promote consistent citation practices, improve the discoverability and reuse of research outputs, and clarify expectations around data sharing and licensing.

## Acronyms

BKG	Bundesamt für Kartographie und Geodäsie
CDDIS	Crustal Dynamics Data Information System
CNES	Centre National d'Etudes Spatiales
CORS	Continuously Operating Reference Station(s)
DOI	Digital Object Identifier
ESA	European Space Agency
GA	Geoscience Australia
GFZ	GFZ Helmholtz Centre for Geosciences
GGOS	Global Geodetic Observing System
IERS	International Earth Rotation and Reference Systems Service
IGE	Instituto Geografico Nacional de Espana
IGN	Institut national de l'information géographique et forestière
JAXA	Japan Aerospace Exploration Agency
JPL	Jet Propulsion Laboratory
KASI	Korea Astronomy and Space Science Institute
MLHUD-SMD	Ministry of Lands, Housing and Urban Development Surveys and Mapping Department
RTCM	Radio Technical Commission for Maritime Services
SIO	Scripps Institution of Oceanography
SPC	Station Proposal Committee
UPAD	University of Padova
WHU	Wuhan University



# CDDIS Global Data Center Technical Report 2025

P. Michael

NASA Goddard Space Flight Center, Code 61A  
Greenbelt, MD 20771 USA  
[benjamin.p.michael@nasa.gov](mailto:benjamin.p.michael@nasa.gov)

## 1 Introduction

The Crustal Dynamics Data Information System (CDDIS) is one of NASA's Earth Observing System Data and Information System (EOSDIS) Distributed Active Archive Centers (DAACs) (see <https://earthdata.nasa.gov/centers/cddis-daac>). CDDIS supports the international space geodesy community. For over 45 years, CDDIS has provided continuous, long-term, public access to Global Navigation Satellite System (GNSS), Satellite Laser Ranging (SLR), Very Long Baseline Interferometry (VLBI), and Doppler Orbitography and Radiopositioning Integrated by Satellite (DORIS) data and derived products required for a diverse variety of scientific studies, including the determination of a global terrestrial reference frame, and geodetic studies in plate tectonics, earthquake displacements, volcano monitoring, Earth orientation, and atmospheric angular momentum, among others. EOSDIS DAACs serve a diverse user community and are tasked to provide facilities that enable the discovery and access of science data and products. CDDIS is also a regular member of the International Council for Science (ICSU) World Data System (WDS, <https://www.icsu-wds.org>) and the Earth Science Information Partners (ESIP, <https://www.esipfed.org>).

CDDIS is funded by NASA but cooperates extensively with the international community in support of Earth science research. CDDIS serves as one of the primary data centers and core components for the geodetic services established under the International Association of Geodesy (IAG). In particular, the system has supported the International GNSS Service (IGS) as a global data center since 1992. CDDIS activities within the IGS during 2025 are summarized below. This report also includes any recent changes or enhancements made to CDDIS.

## 2 Archive Contents

As a global data center for the IGS, CDDIS is responsible for archiving and providing access to GNSS data from the global IGS network, as well as the products derived from the analyses of these data in support of both operational and working group/pilot project activities. CDDIS archive is approximately 140 TBytes in size (over 550 million files) of which nearly 90 % (126 TBytes) is devoted to GNSS data and GNSS products. All these GNSS data and derived products are accessible through subdirectories at <https://cddis.nasa.gov/archive/gnss>.

CDDIS archive of IGS data and products are globally accessible through secure ftp (FTPS/FTP-SSL, address: <ftp://gdc.cddis.eosdis.nasa.gov>) and through web-based archive access (<https://cddis.nasa.gov/archive>). CDDIS is located at NASA's Goddard Space Flight Center in Greenbelt, Maryland, and is available to users 24 hours per day, seven days per week.

### 2.1 GNSS Data

#### 2.1.1 Main Data Archive

The user community has access to GNSS data and derived products available through the on-line global data center archives of the IGS. Nearly 50 operational and regional IGS data centers and station operators make data available in RINEX format to CDDIS from receivers on a daily, hourly, and sub-hourly basis. CDDIS also accesses the archives of other IGS global data centers (GDCs) to retrieve (or receive) data holdings not routinely transmitted to CDDIS by an operational or regional data center. However, this is not a formal mirroring of the other GDCs, and as such it is possible that GDCs are not in a one-for-one agreement on holdings. Table 1 summarizes the types of IGS GNSS data sets available at CDDIS in the operational, non-campaign directories of the GNSS archive.

The main GNSS data archive (<https://cddis.nasa.gov/archive/gnss/data>) at CDDIS contains GPS and GPS+GLONASS data in RINEX V2 format and multi-GNSS data in RINEX V3 and RINEX V4 formats. Since January 2016, RINEX V3 data, and since May 2022, RINEX V4 data, using the V3 “long” filename specification, have been made available here along with the RINEX V2 data. The availability of RINEX V3 data into the operational, main archives at the IGS GDCs (and detailed in the “RINEX V3 Transition Plan”) addressed a key recommendation from the IGS 2014 Workshop: “one network one archive” and provided for the better integration of multi-GNSS data into the entire IGS infrastructure. Starting in 2015, stations began submitting RINEX V3 data using the format’s “long” filename specification. The transition plan specified that RINEX V3 data from IGS network sites using the V3 filename structure should be archived in the same directories as the RINEX V2 data. Therefore, starting on January 1, 2016, all daily, hourly, and high-rate data submitted to CDDIS in RINEX V3 format and using the long,

**Table 1:** GNSS Data Type Summary

Data type	Sampling Rate	Data Format	Available On-line
Daily GNSS	30 sec.	RINEX V2	Since 1992
Daily GNSS	30 sec.	RINEX V3	Since 2016
Daily GNSS	30 sec.	RINEX V4	Since 2022
Hourly GNSS	30 sec.	RINEX V2	Since 2005
Hourly GNSS	30 sec.	RINEX V3	Since 2016
Hourly GNSS	30 sec.	RINEX V4	Since 2022
High-rate GNSS	1 sec.	RINEX V2	Since 2001
High-rate GNSS	1 sec.	RINEX V3	Since 2016
High-rate GNSS	1 sec.	RINEX V4	Since 2022
Satellite GPS	10 sec.	RINEX V2	2002-2012

V3 filename specification have been archived in the same directories as the RINEX V2 data (which use the 8.3.Z filename for daily and hourly files and the 10.3.Z filename format for high-rate files). In late 2021, the RINEX 4.00 format, which follows the V3 “long” filename specification, was officially accepted by the IGS Governing Board. The Infrastructure Committee developed a transition plan for the new format. More information on this transition plan is available in [IGSMAIL #8207](#) sent in May 2022. In addition, these RINEX V3 and RINEX V4 files are compressed in gzip (.gz) format; files in RINEX V2 format now use gzip (.gz) as of 1 December 2020. These data in RINEX V3 and RINEX V4 formats include all available multi-GNSS signals (e.g., Galileo, QZSS, SBAS, BeiDou, and IRNSS) in addition to GPS and GLONASS.

CDDIS archives three major types/formats of GNSS data, daily, hourly, and high-rate sub-hourly, all in RINEX format, as described in Table 1. Nearly 226K daily station days from 582 distinct GNSS receivers were archived at CDDIS during 2025 of these sites, 116 sites supplied both RINEX V2 and V3 data (see Table 2), and 6.2K daily station days from 26 GNSS receivers were archived in RINEX V4 format. A complete list of daily, hourly, and high-rate sites archived in CDDIS can be found in the yearly summary reports at URL <https://cddis.nasa.gov/archive/reports/gnss>. All incoming files for CDDIS archive are now checked for conformance to basic rules, such as valid file type, non-empty file, correct compression usage, consistency between filename and contents, correct file naming convention usage, and other logic checks. After incoming files pass these initial checks, content metadata are extracted and the files undergo further processing based on data type and format.

Daily RINEX V2 data are quality-checked, summarized (using UNAVCO’s teqc software), and archived to public disk areas in subdirectories by year, day, and file type; the summary and inventory information are also loaded into an on-line database. However, this data quality information, generated for data holdings in RINEX V2 format, is not available

**Table 2:** GNSS Data Archive Summary for 2025

Data Type	Number of sites					Vol.	# files	Directory
	V2	V3	V2+V3	V4	Unique			
Daily	212	483	116	26	582	2018 GB	1.1 M	/gnss/data/daily
Hourly	109	392	76	14	425	738 GB	12.9 M	/gnss/data/hourly
High-rate	55	336	49	14	344	21.5 TB	27.7 M	/gnss/data/highrate

through the software used by CDDIS to summarize data in RINEX V3 or RINEX V4 format. CDDIS continues to investigate and evaluate software capable of providing data summary/quality control (QC) information for RINEX V3 and RINEX V4 data.

Within minutes of receipt, the hourly GNSS files are archived to subdirectories by year, day, and hour. Although these data are retained online, the daily files delivered at the end of the UTC day contain all data from these hourly files and thus can be used in lieu of the individual hourly files.

### 2.1.2 Broadcast Navigation Files

CDDIS generates global RINEX V2 broadcast ephemeris files (for both GPS and GLONASS) on a daily and hourly basis. The hourly concatenated broadcast ephemeris files are derived from the site-specific ephemeris data files for each hour and are appended to a single file that contains the orbit information for all GPS and GLONASS satellites for the day up through that hour. The merged ephemeris data files, named `hourDDD0.YYn.gz`, are then copied to the day's subdirectory within the hourly data file system. Within 1-2 hours after the end of the UTC day, after sufficient station-specific navigation files have been submitted, this concatenation procedure is repeated to create the daily broadcast ephemeris files (both GPS and GLONASS), using daily site-specific navigation files as input. These daily RINEX V2 broadcast ephemeris files, named `brdcDDD0.YYn.gz` and `brdcDDD0.YYg.gz`, are then copied to the corresponding year/day nav file subdirectory as well as the yearly `brdc` subdirectory (`/gnss/data/daily/YYYY/brdc`). CDDIS also generates daily RINEX V3 concatenated broadcast ephemeris files. The files are archived in the yearly `brdc` subdirectory (<https://cddis.nasa.gov/archive/gnss/data/daily/YYYY/brdc>) with a filename of the form `BRDC00IGS_R_YYYYDDHMM_01D_MN.rnx.gz`. The procedure for generating these files is similar to the V2 procedure in that site-specific, mixed V3 ephemeris data files are merged into to a single file that contains the orbit information for all GNSS satellites for the day. Users can thus download these single, daily (or hourly) files (in both RINEX V2 and V3 formats) to obtain unique navigation messages, rather than downloading multiple broadcast ephemeris files from the individual stations.

Beginning in 2022, the TUM/DLR team began providing to CDDIS a daily RINEX V4

broadcast ephemeris file. These files are archived in the yearly `brdc` subdirectory (<https://cddis.nasa.gov/archive/gnss/data/daily/YYYY/brdc>) with a filename of the form `BRD400DLR_S_YYYYDDHHMM_01D_MN.rnx.gz`.

CDDIS also archives a merged, multi-GNSS broadcast ephemeris file containing GPS, GLONASS, Galileo, BeiDou, QZSS, and SBAS ephemerides. This file, generate by colleagues at the Technical University in Munich (TUM) and Deutsches Zentrum für Luft und Raumfahrt (DLR) from real-time streams, contains all the unique broadcast navigation messages for the day. The file, named `BRDM00DLR_S_YYYYDDD0000_01D_MN.rnx.gz`, is stored in daily subdirectories within the archive (`/gnss/data/daily/YYYY/DDD/YYp`) and in a yearly top-level subdirectory (`/gnss/data/daily/YYYY/brdc`).

Creation of the merged GPS/QZSS LNAV and CNAV navigation file generated from real-time streams with the naming convention `BRDX00DLR_S_YYYYDDHHMM_01D_MN.rnx.gz` ceased at the end of 2021. Archival of these files using the RINEX V2 naming convention which were stored in the MGEX campaign directories ended in the summer of 2020.

### 2.1.3 Supporting Information

CDDIS generates and updates “status” files, (`/gnss/data/daily/YYYY/DDD/YYDDD.status` for RINEX V2 data and `YYDDD.V3status` for RINEX V3 data) that summarize the holdings of daily GNSS data. These status files of CDDIS GNSS data holdings reflect timeliness of the data delivered, as well as statistics on number of data points, cycle slips, and multipath (for RINEX V2 data). The user community can thus view a snapshot of data availability and quality by checking the contents of such a summary file.

## 2.2 IGS Products

CDDIS routinely archives IGS operational products (daily, rapid, and ultra-rapid orbits and clocks, ERP, and station positions) as well as products generated by IGS working groups and pilot projects (ionosphere, troposphere, real-time, MGEX). Table 3 below summarizes the GNSS products available through CDDIS. CDDIS currently provides online access to all IGS products generated since the start of the IGS Test Campaign in June 1992 in the file system `/gnss/products`; products from GPS+GLONASS data are available through this filesystem. Products derived from GLONASS data only continue to be archived at CDDIS in a directory structure within the file system `/glonass/products`.

CDDIS also continues to archive combined troposphere estimates in directories by year and day of year. Global ionosphere maps of total electron content (TEC) from the Ionosphere Map Exchange (IONEX) Associate Analysis Centers (AACs) are also archived in subdirectories by year and day of year. Real-time clock comparison products have been archived at CDDIS in support of the IGS Real-Time Pilot Project, and current IGS Real-Time Service, since 2009.

**Table 3:** GNSS Product Summary for 2024

Product Type	Number of ACs/AACs	Volume	Directory
Orbits, clocks, ERP positions	14+Combinations	5.2 GB/week	<code>/gnss/products/WWW</code> (GPS, GPS+GLONASS) <code>/glonass/products/WWW</code> (GLONASS only)
Troposphere	Combination	3.8 MB/day, 1.4 GB/year	<code>/gnss/products/troposphere/YYYY</code>
Ionosphere	7+Combination	8 MB/day, 2.9 GB/year	<code>/gnss/products/ionosphere/YYYY</code>
MGEX	8	3.1 GB/week	<code>/gnss/products/WWW</code>

Note: WWW=4-digit GPS week number; YYYY=4-digit year

Seven AACs – Center for Orbit Determination in Europe (CODE), GFZ Helmholtz Centre for Geosciences (GFZ), Space Geodesy Team of CNES (GRG), Japanese Aerospace Exploration Agency (JAXA), Shanghai Astronomical Observatory (SHAO), GLONASS Information and Analysis Center (IAC), and International GNSS Monitoring and Assessment System (iGMAS at Wuhan) generated weekly products (orbits, ERP, clocks, and others) in support of MGEX; these AACs now utilize the “long” filename convention for their products. These files are archived at CDDIS by GPS week (`/gnss/products/WWW`).

Colleagues at DLR and the Chinese Academy of Sciences (CAS) provide a differential code bias (DCB) product for the MGEX campaign. This product is derived from GPS, GLONASS, Galileo, and BeiDou ionosphere-corrected pseudorange differences and is available in the bias Solution Independent Exchange (SINEX) format. DLR has provided quarterly DCB files containing daily and weekly satellite and station biases since 2013 in CDDIS directory `/gnss/products/biases`; CAS provides files on a daily basis. Additional details on the DCB product are available in [IGSMail #6868](#) sent in February 2014 and [IGSMail #7173](#) sent in October 2015. Both products use the RINEX V3 file naming convention.

In late summer 2022, the IGS and the ACs began creating their GNSS products using the RINEX V3 file naming convention. From GPS week 2222 through GPS week 2237, these products were archived in the directory structure `/gnss/products/WWW/igs20` for testing purposes. Starting with GPS week 2238 (November 27, 2022), CDDIS began archiving these files in the operational subdirectories (`/gnss/products/WWW`). More information on this file name transition is available in [IGSMail #8238](#) sent in July 2022 and [IGSMail #8274](#) sent in November 2022.

### 2.3 Real-Time Activities

CDDIS real-time caster has been operational since early 2015 in support of the IGS Real-Time Service (IGS RTS). By the end of 2025, CDDIS caster broadcasts 36 GNSS product and 375 data streams in real-time. The caster runs the NTRIP (Network Transport of RTCM via Internet Protocol) format. A full updated listing of all the streams CDDIS provides can be found at <https://www.earthdata.nasa.gov/data/space-geodesy-techniques/gnss/ntrip-status>.

CDDIS caster serves as the third primary caster for the IGS RTS, thus providing a more robust topology with redundancy and increased reliability for the service. User registration, however, for all three casters is unique; therefore, current users of the casters located at the IGS/UCAR and BKG are required to register through CDDIS registration process in order to use CDDIS caster. More information about CDDIS caster is available at <https://www.earthdata.nasa.gov/data/space-geodesy-techniques/gnss/real-time-data>.

CDDIS staff updated the caster to provide new 10-character mount point names for both data and derived product streams, as per direction of the IGS Real-Time Working Group (RTWG). The expanded mount point names align with the RINEX V3 naming convention utilized within the IGS to accommodate multi-constellation data. CDDIS caster configuration was also updated to relay data streams from upgraded hardware and improved BKG and Geoscience Australia casters. CDDIS staff also developed scripts to monitor and report GNSS data streams with unusually high mean latencies (greater than 10 seconds).

CDDIS utilizes the EOSDIS Earthdata Login, for authenticating file uploads to its incoming file server. Since the NTRIP-native registration/access software was not compatible with NASA policies, CDDIS developed software to interface the caster and the Earthdata Login within a generic Lightweight Directory Access Protocol (LDAP) framework. Access to CDDIS caster requires that new users complete two actions: 1) an Earthdata Login registration and 2) a CDDIS caster information form, providing the user's email, institution, and details on their planned use of the real-time data. Following completion, the information is submitted to CDDIS staff for the final steps to authorize access to CDDIS caster; this access is typically available to the user within 24 hours.

### 2.4 Supporting Information

Daily status files of GNSS data holdings, show timeliness of data receipt and statistics on number of data points, cycle slips, and multipath, continue to be generated by CDDIS for RINEX V2 data; status files, with limited information, summarizing RINEX V3 data holdings are also available. These files are archived in the daily GNSS data directories and available through at URL <https://cddis.nasa.gov/reports/gnss/status>.

Other available ancillary information at CDDIS include daily, weekly, and yearly summaries of IGS tracking data (daily, hourly, and high-rate, in both RINEX V2 and V3

**Table 4:** GNSS Data Retrieval Summary

Data Type	# of Files	Volume
Daily	144 M	217 TB
Highrate	286 M	118 TB
Hourly	589 M	45 TB
Products	89 M	15 GB

formats) archived at CDDIS are generated on a routine basis. These summaries are accessible through the web at URL <https://cddis.nasa.gov/reports/gnss>. CDDIS also maintains an archive of and indices to IGS Mail, Report, Station, and other IGS-related messages.

### 3 System Usage

Summarizing the retrieval of GNSS data and products from the online archive in 2025, Table 4 illustrates the number and volume of GNSS files retrieved by the user community during the past year, categorized by type (daily, hourly, high-rate, products). Over 1.1 billion files (over 395 TBytes) were transferred in 2025.

## 4 Recent Developments

### 4.1 Updates to Archive Access

CDDIS has a large international user community; 150k registered users and over 230K unique hosts accessed the GNSS files in the system in 2025. Today, users access CDDIS archive through encrypted anonymous ftp and https.

Archive access through the https protocol utilizes the same NASA single sign-on system, the EOSDIS Earthdata Login utility, as is used for the file upload and real-time caster user authentication. Before using the https protocol to access CDDIS archive, new users must initially access the webpage, <https://cddis.nasa.gov/archive>, to establish an account and authorize access; this page will then redirect the user to the Earthdata Login page. Earthdata Login allows users to easily search and access the full breadth of all twelve EOSDIS DAAC archives. Earthdata Login also allows CDDIS staff to know our users better, which will then allow us to improve CDDIS capabilities.

Once an account is established, the user has all permissions required to access CDDIS archive using the https protocol, via a web browser or via a command line interface (e.g., through cURL or Wget) to script and automate file retrieval.

In addition, ftp-ssl access, an extension of ftp using TLS (transport layer security), can be used for scripting downloads from CDDIS archive. The ftp-ssl is the option most similar to standard anonymous ftp. As with https, ftp-ssl will satisfy U.S. Government/NASA requirements for encryption.

Examples on using these protocols, including help with the cURL and Wget commands, are available on CDDIS website; users are encouraged to consult the available documentation including examples at: <https://www.earthdata.nasa.gov/centers/cddis-daac/archive-access>.

## 4.2 Metadata Improvements

CDDIS continues to make modifications to the metadata extracted from incoming data and product files pushed to its archive and implemented these changes in the new file ingest software system. These enhancements have facilitated cross-discipline data discovery by providing information about CDDIS archive holdings to other data portals such as the EOSDIS Earthdata Search client and future integration into the GGOS portal. The staff continues work on a metadata evolution effort, re-designing the metadata extracted from incoming data and adding information that will better support EOSDIS applications such as its search client and the metrics collection effort. CDDIS is also participating in GGOS metadata efforts within the Bureau of Networks and Observations.

CDDIS continues to create and register Digital Object Identifiers (DOIs) to select IGS collections (GNSS data and derived products). DOIs can provide easier access to CDDIS data holdings and allow researchers to cite these data holdings in publications. Landing pages are generated for each of the DOIs created for CDDIS data products and linked to description pages on CDDIS website; an example of a typical DOI description (or landing) page, for daily Hatanaka-compressed GNSS data files, can be viewed at: <https://www.earthdata.nasa.gov/data/catalog/cddis-gnss-dly-30sec-hatanaka-obs-1>. DOIs have now been assigned to the majority of GNSS data and product sets archived at CDDIS.

# 5 Future Plans

## 5.1 Website Migration

In response to requirements outlined in the 21<sup>st</sup> Century Integrated Digital Experience Act (IDEA), NASA launched the Web Modernization Project to consolidate the agency's multitude of websites into [nasa.gov](https://nasa.gov) or [science.nasa.gov](https://science.nasa.gov). NASA's Earth Science Data Systems (ESDS) Program followed suit and launched the Web Unification Project in December 2021 to migrate all ESDS-funded web properties to [earthdata.nasa.gov](https://earthdata.nasa.gov) by the end of 2026.

Beginning in March 2025, updates took place on the public-facing CDDIS website. These changes included the migration of the CDDIS website (including [cddis.nasa.gov](https://cddis.nasa.gov)) to the Earthdata website ([earthdata.nasa.gov/centers/cddis-daac](https://earthdata.nasa.gov/centers/cddis-daac)). By July 2025, all content from the CDDIS website was migrated over to the Earthdata website.

These changes will only affect the user interface that accessed CDDIS information and web content. The paths for finding and downloading data within the CDDIS archive will not change (located at <https://cddis.nasa.gov/archive>; Earthdata Login required to access). CDDIS will do everything possible to ensure that users have a seamless transition during this migration.

This effort is NASA's approach to improve data discoverability and data findability and build efficient pathways for data users to access data and information from all of NASA's DAACs.

## 5.2 Real-Time Activities

CDDIS will continue to add real-time data and product streams to its operational caster in support of the IGS RTS. CDDIS continues to review the implementation of software to capture real-time streams for generation of 15-minute high-rate files for archive.

## 6 Contact Information

To obtain more information about CDDIS IGS archive of data and products, contact:

Patrick Michael, Email: [Benjamin.P.Michal@nasa.gov](mailto:Benjamin.P.Michal@nasa.gov)  
Manager, CDDIS

web: <https://cddis.nasa.gov>  
Code 61A  
NASA GSFC  
Greenbelt, MD 20771  
Phone: (301) 614-5370  
Fax: (301) 614-6015

General questions on CDDIS, archive contents, and/or help using the system, should be directed to the user support staff at: [support-cddis@earthdata.nasa.gov](mailto:support-cddis@earthdata.nasa.gov).

## **7 Acknowledgments**

Funding for CDDIS, and its support of the IAG, IGS, and other services, is provided by NASA through the Earth Science Data and Information System (ESDIS) project, which manages the EOSDIS science systems and DAACs. The authors would like to acknowledge the entire CDDIS staff. The success of CDDIS and its recognition in the many international programs supported by the system can be directly attributed to the continued dedicated, consistent, professional, and timely support of its staff.



# The GNSS Science Support Centre (GSSC) - the ESA IGS Global Data Centre - Technical Report 2025

J.C. Berton<sup>1</sup>, S. del Rio García<sup>2</sup>, N. Castrillo Merlán<sup>2</sup>,  
E. Schönemann<sup>1</sup>, J. Ventura-Traveset<sup>4</sup>, E. Montagnon<sup>3</sup>

<sup>1</sup> European Space Operations Centre, Darmstadt, Germany

<sup>2</sup> Starion España S.L.U., Madrid, Spain

<sup>3</sup> European Space Astronomy Centre, Villafranca, Spain

<sup>4</sup> European Space Agency Toulouse Office, Toulouse, France

## 1 Introduction

The GNSS Science Support Centre (GSSC) is the GNSS data preservation and exploitation environment provided by the ESA Science Navigation Operations Section in support to the IGS and the international geodetic scientific community.

The [\[GSSC\]](#) hosts:

- a large GNSS data repository, the **GSSC Archive**;
- a Digital Platform for GNSS data exploration, **GSSC Now**;
- data analysis features, **GSSC Now Datalabs**; and,
- ESA's online GNSS knowledge base, **Navipedia**.

As an IGS Global Data Centre (GDC), the GSSC contributes to GNSS data archiving and dissemination. Along the IGS Data Centres Charter, the GSSC collaborates with other IGS Data Centres and Analysis Centres to provide free and worldwide access to IGS data and products.

## 2 GSSC Archive

### 2.1 GSSC Archive Content

The GSSC Archive primarily consists of data collected from other geodetic Data Centres, ensuring data redundancy, long-term preservation and enhanced global accessibility. This redundancy strengthens the resilience of the global geodetic infrastructure by minimizing the risk of data loss and ensuring continuous access in case of network or server disruptions.

Currently, the GSSC implements a mirroring scheme to retrieve data from other geodetic Data Centres, ensuring that GSSC repository contains primarily GNSS data and products, but since October 2025, across all four geodetic techniques (GNSS, SLR, VLBI and DORIS). The files are sourced from the geodetic Data Centres indicated in Table 1.

Geodetic Technique	Data Source Repositories
GNSS	Crustal Dynamics Data Information System (CDDIS) Bundesamt für Kartographie und Geodäsie (BKG) Institut Géographique National (IGN)
SLR	Crustal Dynamics Data Information System (CDDIS)
DORIS	Crustal Dynamics Data Information System (CDDIS)
VLBI	Observatoire de Paris (OPAR)

Table 1: GSSC data sources for the four geodetic techniques

In most cases, the GSSC ingests assets by automatically pulling files directly from remote source repositories. Although this process runs through fully automated scheduled jobs, GSSC operators can manually trigger these jobs when necessary. Each download job is configured according to a pre-defined execution schedule and the time window it scans, as detailed in Table 2 (IGS Data) and Table 3 (IGS Products).

As shown in Figure 1 GSSC Storage Trend of IGS Data and Products below, the volume of the different IGS datasets hosted at GSSC keeps growing steadily.

The GSSC Archive provides access to more than 270 million of IGS assets (data and products files), as depicted in Table 4.

### 2.2 GSSC Archiving Concept

During ingestion, the GSSC Now software retrieves the list of files at the remote path, filters the list, downloads the selected files, moves them into the appropriate GSSC directory and submits each file for processing.

<b>IGS data type</b>	<b>Source</b>	<b>Schedule</b>	<b>Scans</b>	<b>GSSC DB</b>
Daily GNSS	CDDIS	Every hour	Last 24 hours	CDDIS CORS
		Sunday and Wednesday	Last 7 days	
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
Daily GNSS	BKG	Every hour	Last 24 hours	BKG CORS
Daily GNSS	IGN	Every hour	Last 24 hours	IGN CORS
Merged site navigation files	CDDIS	Every hour	Last 24 hours	CDDIS CORS
		Sunday and Wednesday	Last 7 days	
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
Hourly GNSS	CDDIS	Every hour	Last 24 hours	CDDIS CORS
		Sunday and Wednesday	Last 7 days	
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
High rate GNSS data	CDDIS	Every hour	Last 24 hours	CDDIS CORS
		Sunday and Wednesday	Last 7 days	
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
High rate GNSS data	BKG	Every hour	Last 24 hours	BKG CORS
		Sunday and Wednesday	Last 7 days	
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	

**Table 2: IGS Data Storage in GSSC Archive and Ingestion Parameters**


Furthermore, the system regularly checks for gaps between the source repository and the GSSC repository. If any discrepancy is detected, a dedicated downloader is launched to retrieve the missing data.

In addition to the mirroring functionalities, the GSSC has also the capability to get data

IGS product type	Source	Schedule	Scans	GSSC DB
Orbits, clocks, ERP positions	CDDIS	Twice a day at 11 and 23	Last 24 hours	
		Sunday and Wednesday	Last 7 days	CDDIS CORS
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
MGEX products	CDDIS	Twice a day at 11 and 23	Last 24 hours	
		Sunday and Wednesday	Last 7 days	CDDIS CORS
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
Ionosphere	CDDIS	Twice a day at 11 and 23	Last 24 hours	
		Sunday and Wednesday	Last 7 days	CDDIS CORS
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
Differential Code Biases	CDDIS	Twice a day at 11 and 23	Last 24 hours	
		Sunday and Wednesday	Last 7 days	CDDIS CORS
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	
Troposphere	CDDIS	Last 24 hours		
		Sunday and Wednesday	Last 7 days	CDDIS CORS
		Twice a month on 1 <sup>st</sup> and 15 <sup>th</sup>	Previous month	

**Table 3: IGS Data Products Storage in GSSC Archive and Ingestion Parameters**

directly uploaded into the GSSC repository by accredited contributors. This ingestion mechanism is already in place for some GNSS datasets of different ESA space missions and projects, but also to get IGS products from IGS Analysis Centres such as the ESA

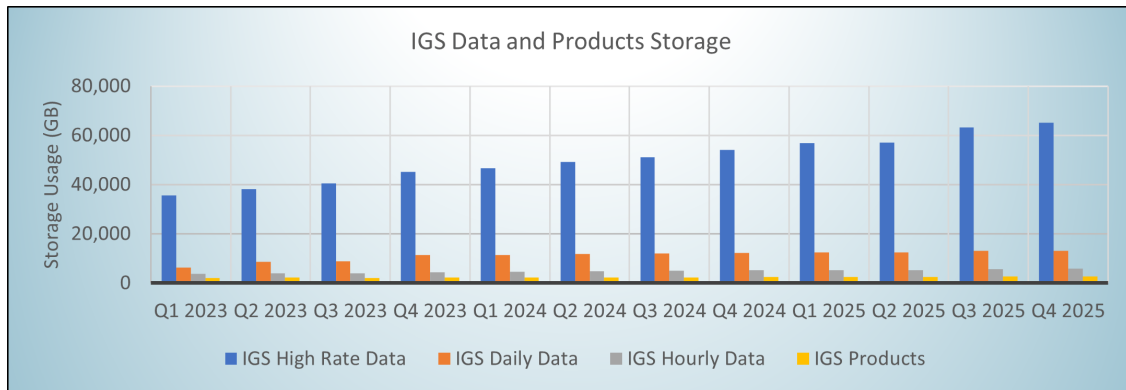

**Figure 1:** GSSC Storage Trend of IGS Data and Products

Data Format	Nb. Files
RINEX 2	>154 M
RINEX 3	>104 M
RINEX 4	>1 M
Data Type	Nb. Files
IGS Hourly Files	>135 M
IGS Daily Files	>73 M
IGS High-rate Files	>18 M
Products	Nb. Files
IGS Products	>4 M
Others	Nb. Files
IGS Stations logs, SINEX...	>38 M

**Table 4:** Number of IGS Assets in GSSC Archive

Navigation Support Office. In both cases, i.e. the data mirroring mechanism and the data upload by designated GSSC contributors, the GSSC Now Software handles metadata extraction. Each file added into the GSSC repository is processed to extract its metadata, which is then indexed and used to enable the users faceted search in GSSC Now.

Whereas the genuine IGS GDC repository still lies at the heart of the GSSC, its content has been expanded to include datasets from supplementary GNSS ground networks, relevant scientific services, GNSS receivers onboard spacecrafts and ESA experiments.

## 2.3 GSSC Archive Access

The GSSC offers various access methods to its [datasets](#) including FTP, SFTP, HTTPS, the NTRIP Caster and a REST API.


### 2.3.1 GSSC FTP/SFTP

The GSSC FTP and SFTP servers are both accessible using the hostname "gssc.esa.int". The FTP server operates on port 21, while the SFTP server uses port 2200. Public users can log in to either server by entering "anonymous" as the username and leaving the password field blank. These interfaces allow anonymous users to perform read operations.

Additionally, the GSSC provides an [FTP Web Client](#), where public users can also log in by entering 'anonymous' in the Account field and leaving the Password field empty.


### 2.3.2 GSSC FTP/SFTP Data Download

As shown in Figure 2 below, the volume of the different IGS datasets downloaded from GSSC benefits the worldwide scientific community.

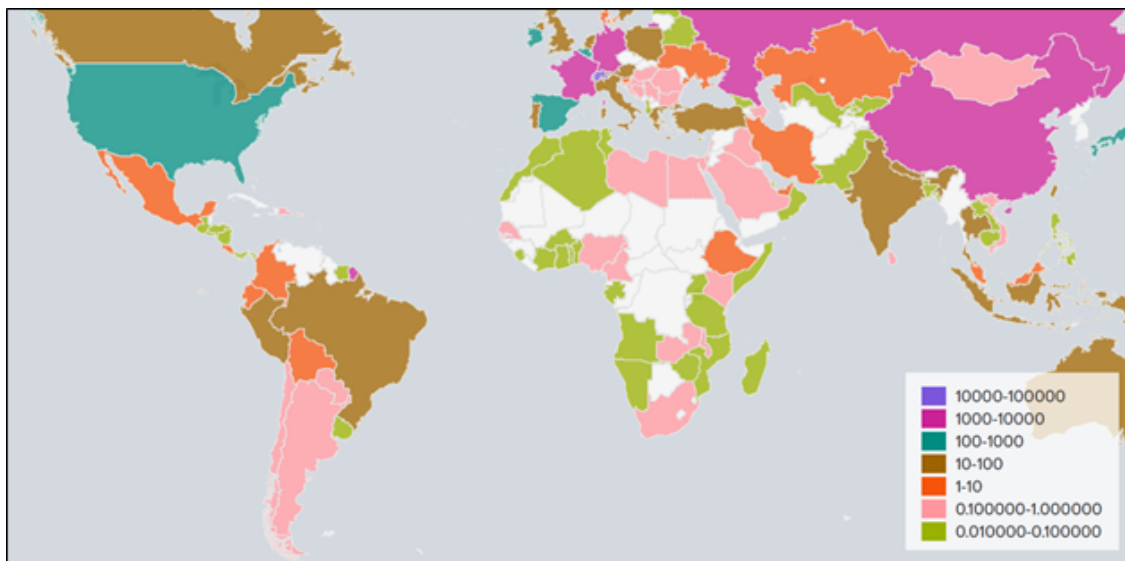

**Figure 2:** Download volumes of IGS files via GSSC FTP in 2025 (GB)

The volume of the different IGS datasets downloaded from GSSC, predominantly IGS Daily assets, has drastically increased over the last 2 years, as shown in Figure 3

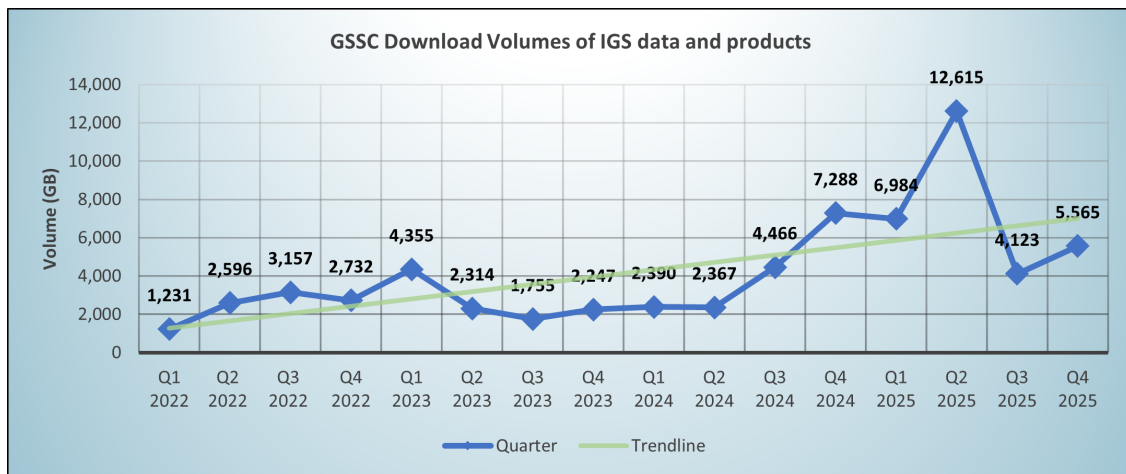

**Figure 3:** Number of downloads of IGS files via GSSC FTP since 2022

### 2.3.3 GSSC Now Portal (HTTPS)

The [\[ESA GSSC Portal\]](#) provides a secure HTTPS-based web interface through which registered GSSC users can access a variety of services and data tools.

## 2.4 GSSC CASTER

The GSSC provides real-time GNSS data streaming through the NTRIP protocol (Networked Transport of RTCM via Internet Protocol). At GSSC, users connect with an [\[NtripClient\]](#) to the caster at using credentials obtained from the [\[GSSC Helpdesk\]](#).

## 2.5 GSSC API

The GSSC Archive exposes a RESTful API for data access and management. The following sections provide the requirements, usage instructions, and example scripts to interact with GSSC services. The full [\[GSSC API documentation\]](#) is publicly available.

### 3 GSSC Now: ESA’s GNSS Science Data Exploitation Platform

#### 3.1 GSSC Now

[GSSC Now] is the digital platform that allows GSSC users to browse, download and analyse data from the GSSC data repositories. GSSC Now currently runs as a public fully operational version. Some GSSC Now features like multiple downloads or access to a private workspace area are only available upon [registration].

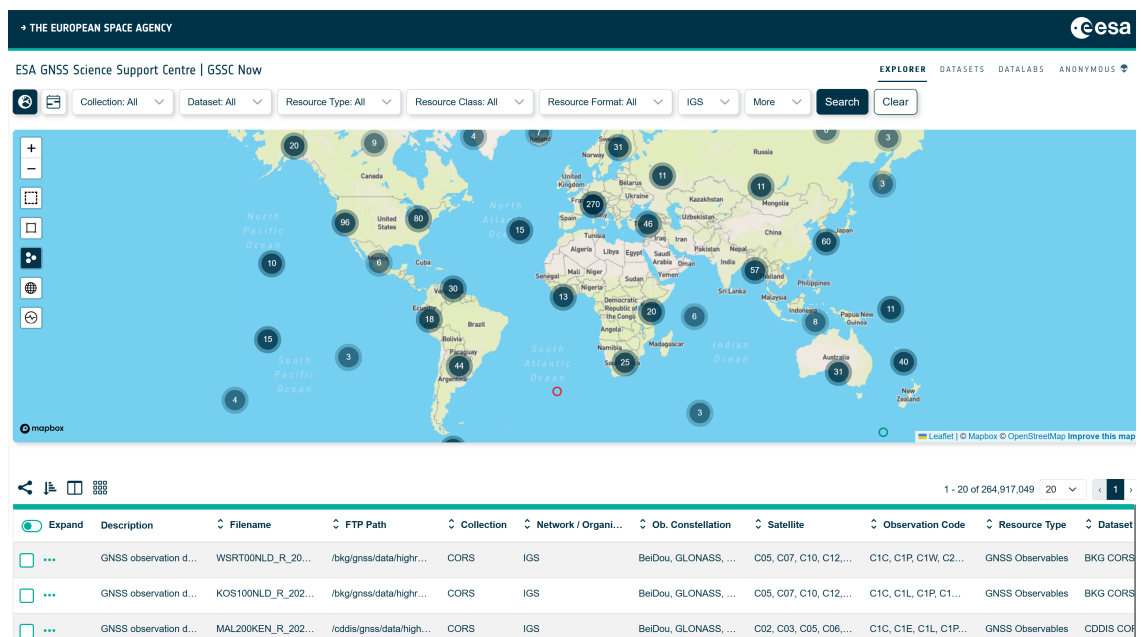


Figure 4: GSSC Now - Explorer View

The GSSC Now offers access to more than 270 million of IGS assets (data and products files). Most of the data is publicly available to scientific researchers and the overall GNSS community through the GSSC Now digital platform, whereas some datasets are under a moderated access policy. Users can browse and retrieve GNSS and related datasets directly through the portal, which provides metadata-based search with faceted filtering, allowing users to locate datasets using criteria such as time, satellite system, region or product type, among others.

#### 3.2 GSSC Datalabs

From the same interface, users can also launch the GSSC Datalabs environment, which supports interactive analysis and visualization of selected datasets and offers tools for

processing, plotting and exploring GNSS data. Results generated during Datalab sessions can be saved to a personal workspace that serves as persistent storage for analysis outputs, plots and processed files. In addition, users can upload their own assets to the GSSC Now platform, with storage capacity of up to 10 GB.

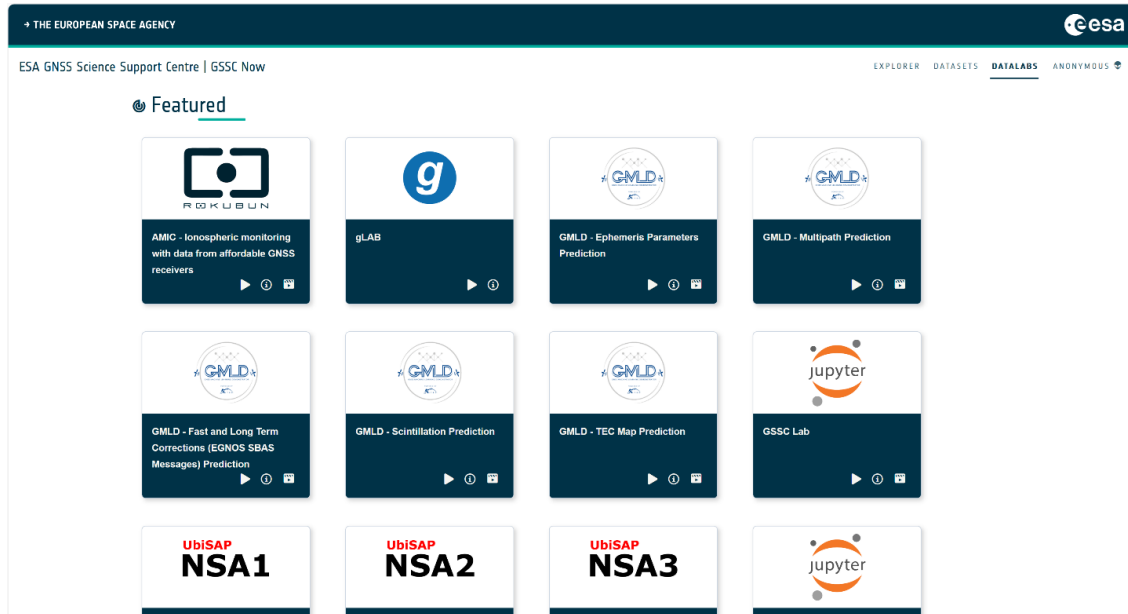


Figure 5: GSSC Datalabs Overview

## 4 GSSC Adoption of the IGS Data Centre Charter

The International GNSS Service (IGS) Infrastructure Committee (IC) issued the Charter for IGS Data Centres in May 2025, defining the roles and responsibilities of Data Centres and Regional Data Centres. As GSSC was designated as an official IGS Global Data Center in 2018, this Charter is considered an applicable document to GSSC.

Current GSSC efforts focus on fully meeting all IGS requirements by implementing the necessary changes and updating the GSSC Now software. The internal assessment of the current level of compliance with IGS needs is shown in Table 5.

<b>Data Collection and Holding</b>	<b>Status</b>
Data ingestion from Operational Data Centres	supported
Products ingestion from Analysis Centres	supported
Mirroring of other Data Centres	supported
Various latencies	supported
Various formats	supported
Various format versions	supported
Plain/compressed files	supported
Products/data	supported
Versioning	supported
<b>Data Dissemination and Performance</b>	<b>Status</b>
Scalability	supported
Redundant infrastructure and data replication	to be addressed
High availability	continuously improved
Low latency data dissemination	to be addressed
Data access control	supported
Intrusion detection control	on-going implementation
Traffic management	continuously improved
Data consistency	supported
Integrity	continuously improved
Monitoring and Analytics	supported
<b>Data Archiving</b>	<b>Status</b>
Long-Term Storage	supported
Metadata extraction	supported
<b>Quality Control</b>	<b>Status</b>
Quality assurance for incoming data	on-going implementation
Detect and flag metadata inconsistencies	on-going implementation
Quality checks on RINEX files	to be addressed
<b>Security and Compliance</b>	<b>Status</b>
Multi-Factor Authentication	to be addressed
Role-Based Access Control	supported
Data Encryption	to be addressed
Security Update/Patch Management	continuously improved
Monitoring and Analytics	on-going implementation
<b>User Support</b>	supported
<b>Continuous Improvement</b>	supported
<b>Reporting</b>	supported

**Table 5: IGS Data Centre needs and implementation status at GSSC**

## 5 GSSC 2025 Highlights

The GSSC continues to consolidate and operate its services to the international GNSS users' community through the expansion of its GNSS data archive and exploration platform.

The number of accesses to the IGS datasets hosted at GSSC, as well as the download volumes of IGS data and products, keeps growing steadily. GSSC currently hosts 270 million of IGS data and products, collected from IGS Regional Data Centres, other IGS Global Data Centres and from IGS Analysis Centres, such as the ESA Navigation Support Office, providing access to IGS assets all around the world.

In 2025, the GSSC adopted the IGS DC Charter as an applicable document and translated the IGS needs into the GSSC Now Software Requirements Baseline, identifying their implications in terms of e.g. data availability, scalability, storage, metadata handling, security, quality. Their implementation within GSSC is planned for 2026.

The GSSC data archiving and distribution functionalities keep supporting the ESA Navigation Support Office in its IGS data processing role and responsibilities: indeed, the year 2025 marked a milestone for GSSC with the ESA Navigation Support decision to fully rely on the GSSC for geodetic long-term data archiving. Therefore, since October 2025 the GSSC Archive has incorporated new datasets for the DORIS and VLBI geodetic techniques, while continuing to expand its GNSS and International Laser Ranging Service (ILRS) collections. DORIS and VLBI data are ingested into the GSSC Archive by mirroring Data Centres operated by the International Doppler Orbitography by Radiopositioning Integrated on Satellite Service (IDS) and International Very Long Baseline Interferometry Service (IVS), respectively.

Major progress was made on the GNSS Now Digital Platform, with three new versions throughout the year 2025. These updates brought reliability and performance optimizations, new features and stability improvements. These accomplishments were possible through the dedicated efforts and close collaboration of the teams from ESA, GMV and Starion.

The GSSC started its data archiving and distribution role in the ESA GENESIS mission, detailing its interface with the global scientific community, while exchanging with the ESA Navigation Support Office in its GENESIS science data processing role. After their approval at ESA Council at Ministerial level, this role will extend to other ESA Navigation missions like Novamoon.

Engagement with the GNSS community was strengthened through the release of the Navipedia contribution capabilities and regular news updates. Furthermore, the GSSC was represented in different prominent international forums, including the European Geosciences Union General Assembly 2025 and the United Nations International Committee on Global Navigation Satellite Systems, Korea. Finally, new collaborative ties were also

pursued with educational institutions, industry stakeholders, and research organizations.

## 6 GSSC Evolution

The GSSC 2026 priorities aim at further adapting the infrastructure and processes to meet the requirements of the first version of the Charter for IGS Service Data Centres.

In support of the ESA Navigation Support Office analyse Centres role, the GSSC will also evolve its Archive to support Earth Orientations Parameters data and products.

The GSSC Now digital platform will further align with user needs to support the archiving and distribution of the ESA GENESIS mission data.

The GSSC will develop Quality Services in line with the requirements of the IGS Data Centre Charter and plans to implement them throughout 2026.

## References

Jean-Christophe Berton, Iván Sermanoukian Molina, Michiel Otten, Tim Springer, Sara Bruni, Florian Dilßner, Mark van Kints, Gaia Fusco, Sara Gidlund, Evelina Sakalauskaite, Pierre Waller, Erik Schönemann, Werner Enderle, *A New Combined Processing for Genesis*, presented at European Geoscience Union General Assembly 2025, April 29, Vienna, Austria. Available at: [https://navigation-office.esa.int/attachments/125051657/1/EGU25\\_-\\_A\\_New\\_Combined\\_Processing\\_for\\_Genesis.pdf](https://navigation-office.esa.int/attachments/125051657/1/EGU25_-_A_New_Combined_Processing_for_Genesis.pdf)

# Wuhan University Data Center Technical Report 2025

M. Li<sup>1</sup>, Q. Zhao<sup>1</sup>

<sup>1</sup> GNSS Research Center, Wuhan University, Wuhan, China  
E-mail: [limin@whu.edu.cn](mailto:limin@whu.edu.cn)

## 1 Introduction

Since 2015, Wuhan University has served as an IGS Global Data Center, dedicated to supporting global users, with a particular focus on the Chinese community, for both post-processing and real-time applications. The WHU Data Center (WHU DC) archives and provides access to GNSS observations from all IGS and MGEX network stations, along with various IGS products.

In addition to releasing routine IGS data and products like the CDDIS DC, the WHU DC also publishes specialized products computed by the Wuhan University Analysis Center, such as bias products, hourly orbit and clock products, real-time ionospheric products, and more.

## 2 Access of WHU Data Center

In order to ensure a more reliable data flow and a better availability of the service, two identical configurations with the same data structure have been setup in Alibaba cloud and Data Server of Wuhan University. Each configuration has:

- FTP access to the GNSS observations and products (<ftp://igs.gnsswhu.cn/>).
- HTTP access to the GNSS observations and products (<http://www.igs.gnsswhu.cn/>).

### 3 GNSS Data & Products of WHU Data Center

The WHU Data Center contains all the regular GNSS data and products, such as navigational data, meteorological data, observational data, and products.

- Navigational data: daily and hourly data (<ftp://igs.gnsswhu.cn/pub/gps/data>)
- Observational data: daily and hourly data (<ftp://igs.gnsswhu.cn/pub/gps/data>)
- Products: orbits, clocks, Earth Rotation Parameters (ERP), and station positions, ionosphere, troposphere (<ftp://igs.gnsswhu.cn/pub/gps/products>)

In addition to the IGS operational products, WHU data center has released ultra-rapid products updated every 1 hour and every 3 hours (<ftp://igs.gnsswhu.cn/pub/whu/MGEX/>) from the beginning of June 2017. The ultra-rapid products include GPS/GLONASS/BDS/Galileo satellite orbits, satellite clocks, and ERP for a sliding 48-hr period, and the beginning/ending epochs are continuously shifted by 1 hour or 3 hours with each update. The faster updates and shorter latency should enable significant improvement of orbit predictions and error reduction for user applications.

WHU data center started to provide multi-GNSS rapid phase bias products in the bias-SINEX format along with self-consistent orbit, phase clock, code biases and attitude quaternion products since September 2021, and the products are traced back to the beginning of 2020 (<ftp://igs.gnsswhu.cn/pub/whu/phasebias/>). Five GNSS are included in our products: GPS, GLONASS, Galileo, BDS and QZSS.

The WHU RT GIMs also are accessible via Wuhan Real Time Data Center (<http://ntrip.gnsslab.cn>) with Mountpoint IONO00WHU0 and Wuhan Data Center (<ftp://igs.gnsswhu.cn/pub/whu/MGEX/realtime-ionex>) in IONEX format.

### 4 Monitoring of WHU Data Center

Since 2024, we have revamped and upgraded our data center's FTP and service websites, with data storage and FTP services both deployed on Alibaba Cloud Storage.

WHU Data Center provides data monitoring function to display log information such as online user status, the arrival status of data and products, and the status of user downloading in real time. It can display real-time data downloading and data analysis related products graphically, with real-time information on online user status and product accuracy.

In order to ensure the integrity of the observation data and the products, we routinely compare the daily data, hourly data and products with those in CDDIS. If one data

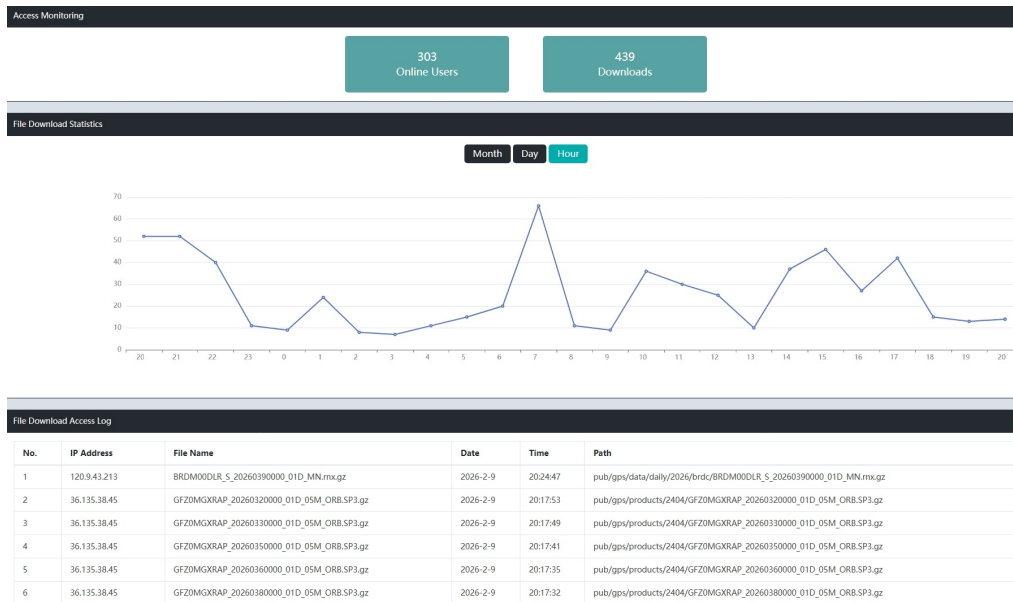


Figure 1: Website download statistics.

file is missing, we will redownload it from CDDISs. Figure 2 shows the status of daily observation.

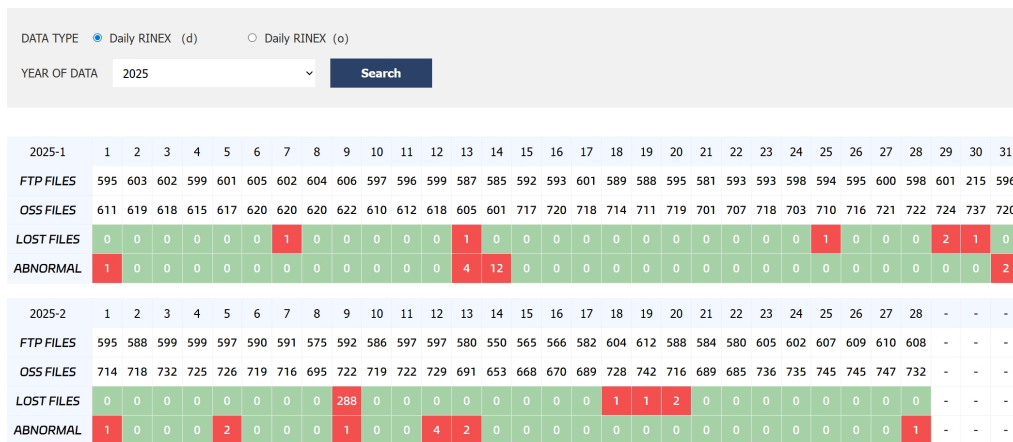


Figure 2: Data and products monitoring of WHU data center.



# BKG Regional Data Center Technical Report 2025

W. Söhne, P. Neumaier, J. Schmidt,  
E. Wiesensarter, A. Stürze, A. Rülke

Federal Agency for Cartography and Geodesy (BKG)  
Frankfurt am Main, Germany

## 1 Introduction

Since more than 25 years BKG is contributing to the IGS data center infrastructure operating a regional GNSS Data Center (GDC). BKG's GDC is also serving as a data center for the regional infrastructure of EUREF as well as for national infrastructure or for specific projects. Two types of data and products are handled in the GDC: file-based (section 2) and real-time (section 3) data and products. Since 2004, BKG is operating various entities for the global, regional and national real-time GNSS infrastructure. The development of the basic real-time components has been done independently from the existing file-based data center. The techniques behind, the user access etc. were completely different from the existing file-based structure. Moreover, operation of a real-time GNSS service demands a much higher level of monitoring than it is necessary in the post-processing world, where for example RINEX files can be reprocessed the next day in case of an error. The core real-time infrastructure is running independently from the file-based infrastructure. However, there are several common features and interfaces like site log files, skeleton files, and high-rate files. Therefore, the BKG GDC serves as the single point of access to the public and merges all kind of GNSS data and products, e.g. via one web interface.

## 2 GDC File Archive

### 2.1 Infrastructure

Since many years, BKG's GDC is running on several virtual machines placed at BKG's premises. It consists of a file server, a database server and an application server dedicated to data processing and web access. All relevant parts of BKG's GDC are backed-up on a daily basis.

## 2.2 Access

Access to the file-based data center is possible via FTP, HTTPS and web interface. The web interface allows the following activities:

- Full “Station List” with many filtering options and links to meta data
- File browser
- Search forms for RINEX files as well as for any file
- Availability of daily, hourly and, to a limited extent, high-rate (i.e. 1 Hz) RINEX files
- Interactive map allowing condensed information about each station

A processing monitor informs about the average time needed to process a single RINEX file and the amount of RINEX files stored daily or hourly. Changes in the processing software or system hardware are indicated as well.

As the FTP protocol has security weaknesses, support for FTP uploads has already been switched off at an earlier stage, and users are encouraged to use the HTTPS protocol for downloading files.

## 2.3 GNSS Data & Products

The BKG GDC contains all the regular GNSS data, as there are

- navigational data, meteorological data, and observational data,
- in RINEX v2 (Rx2), RINEX v3 (Rx3) and RINEX v4 (Rx4),
- daily, hourly and high-rate data

of approximately 967 (with national stations 1.643) globally distributed stations, roughly half of them belonging to the IGS network.

The directory structure applied by BKG is related to projects, i.e. within the “Data Access” a user will see IGS, EUREF, GREF, MGEX directories plus some other or completed projects. The main sub-directories for the projects are

- BRDC for navigational data,
- `highrate` for sub-hourly 1Hz data,
- `nrt` (near real-time) for 30 seconds hourly data,
- `obs` for daily data.

Since at the beginning of storing Rx3 files the standard short file names were identical to

those containing Rx2, BKG decided to introduce parallel sub-directories with the extension `_v3` for storing files with the short names. After the introduction of the long file names in the IGS for the Rx3 files, Rx2 and Rx3 files could be stored both in the `obs` sub-directory and sub-directories with extensions were obsolete.

In 2022, BKG started to store RINEX v4 (Rx4) files. For the test phase, the files were stored in a separate directory `obs_v4`. The files were mainly coming from DLR and GFZ. In 2023, BKG followed the IGS guidelines for finally storing the Rx4 files in the legacy directories. Since then, still only a few numbers of stations started providing Rx4 files. The majority of them are coming from conversion, not directly from the receiver.

Additionally, BKG is providing some IGS products by mirroring from other IGS data centers, mainly from the CDDIS. Each project has some additional sub-directories: products, reports, and stations. For specific projects, more sub-directories might have been introduced.

BKG, as a partner of the CODE consortium, is also providing, as a mirror, several meta data of the Bernese GNSS Software (BSW), version 5.4, in a specific sub-directory `IGSac`.

## 2.4 Monitoring

Routinely data-checks are performed for all incoming files. The files are processed through several steps, see [Goltz et al. \(2017\)](#) for details. An “Error Log” page on the web interface gives valuable information especially to the data providers how often and for what reasons a file was excluded from archiving, see <https://igs.bkg.bund.de/file/errors>.

On the “Station List” page <https://igs.bkg.bund.de/stations> a user or a data provider can see the completeness of the most recent data. You can also see some simple positioning time series for each station which is part of the EUREF or GREF network.

## 2.5 Usage Statistics

25.4 million files are stored in the GDC at the end of 2025, with an overall archive size of 48.0 TB. We are facing with approx. 80.000 uploads and 700.000 downloads per day. There was no noteworthy difference in the number of downloaded files with respect to 2025. Approximately 1.000 different users did visit the GDC websites per day.

In 2025, the GDC experienced only few short-term outages, usually due to interruptions in the IT.

## 2.6 Policy

BKG GDC has to strictly follow the European Union’s General Data Protection Regulation (GDPR). As a consequence, it was agreed in the wider GNSS community to introduce,

if not already applied, generic names and emails in the publicly available files. These changes are ongoing in cooperation with, e.g. the EPN Central Bureau.

## 3 GDC Real-Time Streaming

### 3.1 Infrastructure

The development of the broadcaster technology and its usage for GNSS was mainly driven by BKG. It is originally based on the ICECAST technology and adapted for GNSS data (Weber et al., 2005). Information on the use of real-time data, such as registration and software, can also be found on the GDC homepage. Since 2008, BKG is offering the so-called Professional Ntrip Caster which is used by many organizations and companies around the globe and which is updated and continuously improved. BKG is maintaining various broadcasters for global, regional and national purposes (IGS, EUREF, GREF, other projects). BKG's casters are still hosted by an external service provider and maintained by BKG staff. Similar to the file-based infrastructure – or even more important – is the aspect of redundancy. The redundancy concept for real-time streaming on the data center's side is realized in different ways. For example, the various casters are installed on different virtual machines at the service provider, so if one machine fails not all real-time streams are interrupted at the same time.

### 3.2 Access

The access to the GDC broadcasters is possible with many commercial or individual tools. One software tool for easy access to the various IGS resources is the BKG Ntrip Client (BNC, Weber et al., 2016). Since BNC has been developed in parallel and close connection to the Professional broadcaster development, it is perfectly suited to the open IGS infrastructure.

### 3.3 GNSS Data & Products

As mentioned before, BKG is maintaining different casters (status end of 2025):

- On the IGS caster (<http://igs-ip.net>) approx. 400 data streams in RTCM3.0/1/2/3 format are provided. The majority is in 3.2/3.3 Multiple Signal Message (MSM) format. There are still two streams available in the old RTCM2.3 format (BOR100POL0, DAEJ00KOR0). All streams are provided with long mount-point names.
- On the EUREF caster (<http://euref-ip.net>) approx. 230 data streams in RTCM3.0/1/2/3 format provided. There are still four streams available in the old RTCM2.3

format (BOR100POL0, ROVE00ITA0, UNPG00ITA0, UNTR00ITA0).

- On the PRODUCTS caster (<http://products.igs-ip.net>) approx. 100 data streams in RTCM3 format as well as in the IGS-SSR format, provided from various organizations. Most of these streams are containing satellite clock & orbit corrections. Some of them are providing in addition Observable-specific Signal Biases (OSB) as well as VTEC information. Furthermore, there is a low number of product data streams containing ionosphere information only, and two product streams containing OSB information only. To provide real-time access to broadcast ephemeris, there are various streams available, which carry only ephemerides data sets. Therefore, incoming ephemerides are checked for errors and inconsistencies and then merged, encoded and uploaded to Ntrip broadcasters with a high repetition rate.

The information on the meta-data (e.g. format, message types, sampling rates, receiver type) can be found in the source-table of each caster. Former caster MGEX has been closed during 2025. More information can be found at <https://software.rtcn-ntrip.org/wiki/Sourcetable>.

### 3.4 Monitoring

BKG is monitoring the availability of the data streams of its casters using a dedicated web page (<https://bkgmonitor.gnssonline.eu>). Color-coded, the monitor shows the availability of each data stream, the duration since the last interruption, the percentage of outages per day and month as well as the number of connections per day and month. In addition, one can investigate a table for each data stream showing the history of outages, interesting for users looking for data streams with as much as possible un-interrupted availability.

The IGS RTS provides access to real-time precise products such as orbits, clocks, code and phase biases, which can be used as a substitute for ultra-rapid products in real-time applications. The true performance of these products can be monitored by the daily statistics derived from the comparison with IGS rapid products. The current RTS product monitoring is based on comparisons performed by the RTACC at BKG. In order to satisfy high demands on availability and reliability, the RTACC also provides two combined multi-GNSS product data streams: **SSRA02IGS/SSRC02IGS** (GPS, GLONASS, Galileo) and **SSRA03IGS/SSRC03IGS** (GPS, GLONASS, Galileo, BeiDou). As part of the Center for Orbit Determination in Europe (CODE) BKG has access to high resolution CODE rapid products, which can be processed to perform such comparisons. Hence, the IGS Analysis Center CODE rapid products for GPS, Galileo and GLONASS with a time resolution of 30 seconds are used for monitoring and comparison purposes. Several monitoring results are delivered for the official RTS Web page <https://igs.org/rtts/monitoring/>.

An indirect verification of the individual RT AC results as well as of the combination results is performed by their application to various precise point positioning strate-

gies in real-time (<https://igs.bkg.bund.de/ntrip/ppp>). This is done e.g. using the GPS+GLONASS+Galileo+Beidou observations of our GREF station FFMJ01DEU but with IGS stations as well.

### 3.5 Usage Statistics

While there is still anonymous download for the file-based data, a registration is necessary for accessing real-time data (<https://register.rtcn-ntrip.org/cgi-bin/registration.cgi>). Since 2008, when starting with the registration on an operational basis, the request for registration for BKG' casters has been stable on a high level of more than 600 requests per year (see Figure 2) but increasing since the last years to more than 1200 per year. Many of such registrations show up for a small amount of time only. Nevertheless, the number of so-called listeners, i.e. the requested data streams in parallel, reaches more than 6800 from approx. 200 different users during a typical day and is quite stable. Figure 1 shows the requests to the caster visualized by the daily bandwidth which is constantly increasing over the last decade, in particular for the operational IGS caster after 2019. To balance between the various IGS broadcasters and to keep the increase of the number of listeners and the amount of downloading at BKG small, requests for registration coming from a region where other IGS casters are running, are redirected to the respective providers.

After BKG's casters moved to the new virtual servers in June, a discontinuity in the workload became apparent. This was caused by a caster software bug, that had no effect on the old servers. Meanwhile, this bug has been fixed and a new release of the caster software has been created.

### 3.6 Caster Software

Since July 2024, BKG as the provider and publisher of the Professional Ntrip Caster changed its policy and started offering the caster software without fee, resulting in a significant increase of requests for getting the Caster software.

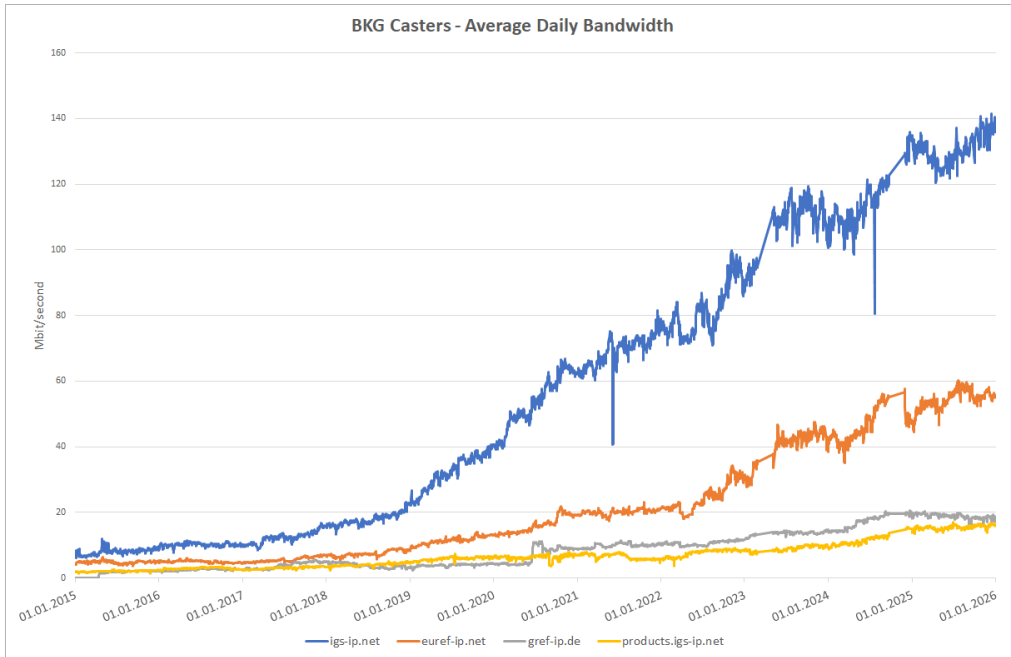


Figure 1: Average daily bandwidth of the BKG Broadcasters from 2015 to the end of 2025

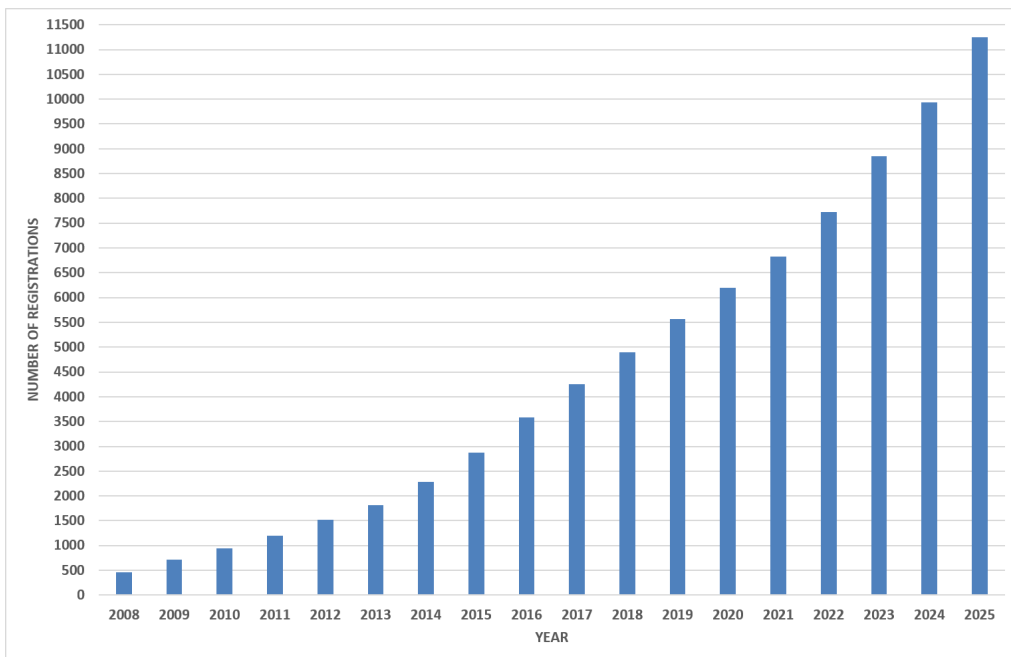


Figure 2: Number of user registrations for usage of the BKG Broadcasters from 2008 to the end of 2025

## References

- Goltz M., E. Wiesensarter, W. Söhne, and P. Neumaier Screening, Monitoring and Processing GNSS Data and Products at BKG Poster presented at the IGS Workshop 2017 in Paris (<http://www.igs.org/assets/pdf/W2017-PS05-08%20-%20Goltz.pdf>)
- Weber, G., D. Dettmering, H. Gebhard, and R. Kalafus Networked Transport of RTCM via Internet Protocol (Ntrip) – IP-Streaming for Real-Time GNSS Applications ION GNSS, 2005, pp. 2243-2247
- Weber, G., L. Mervart, A. Stürze, A. Rülke, and D. Stöcker BKG Ntrip Client (BNC) Version 2.12 Mitteilungen des Bundesamtes für Kartographie und Geodäsie, Band 49, 2016, ISBN 978-3-86482-083-0
- RTCM Standard 10410.1 Networked Transport of RTCM via Internet Protocol (Ntrip) – Version 2.0 RTCM Paper 111-2009-SC-STD
- RTCM Standard 10403.3 Differential GNSS (Global Navigation Satellite Systems) Services – Version 3 RTCM Paper 141-2016-SC104-STD

## Part IV

# Committees, Pilot Projects, Working Groups



# Antenna Committee

## IGS Technical Report 2025

T. Kersten<sup>1,2</sup>, A. Villiger<sup>3</sup>

- <sup>1</sup> Leibniz University Hannover – Institut für Erdmessung  
Schneiderberg 50, D-30167 Hannover, Germany
- <sup>2</sup> Anhalt University of Applied Sciences  
Bauhausstraße 8, DE-06846 Dessau-Roßlau, Germany  
tobias.kersten@hs-anhalt.de
- <sup>3</sup> Swiss Federal Office of Topography (swisstopo)  
Seftigenstrasse 264, CH3084 Wabern, Switzerland  
arturo.villiger@swisstopo.ch

### 1 Introduction: Mandate and Scope of the Antenna Committee (AWG)

The IGS Antenna Committee (AWG), formerly known as the Antenna Working Group, develops, curates, and disseminates antenna phase center offset (PCO) and phase variation (PV) models for GNSS satellites and ground receivers within the International GNSS Service (IGS) framework. In this role, the AWG manages the relevant receiver and satellite antenna models used in routine processing by the IGS, assists the IGS Network Coordinator in maintaining, validating and distributing the relevant model and metadata files, and establishes common rules and recommendations for model content, updates, calibration infrastructure and antenna mounts. The AWG ensures:

- Methodological consistency and traceability of calibrations across different techniques (field, robot, chamber);
- Coordination with IGS working groups and analysis centres regarding updates, conventions, and metadata guidelines;
- Timely communication of changes that may affect analysis results and user operations;
- Management of IGS antenna model files, including recommendations, change control procedures, versioning, and update schedules;

- Definition of requirements and acceptance criteria for calibration facilities and updates (approved methods, documentation standards, and uncertainty reports).

Key outcomes include IGS 20 ANTEX releases with newly introduced/retired antenna entries, and implementation progress on the IGS ANTEX 2.0 migration. Finally, the ring calibration campaign has been finished in 2025.

## 2 Maintenance of IGS ANTEX Files

The AWG manages the IGS 20 ANTEX repository and consolidated files used by the IGS community and external users. Our core activities include adding new antennas with GNSS calibration values, including updated and retrofitted antennas (with new LNAs as new devices).

In 2025, in collaboration with the IGS Network Committee, 79 changes were made to the `rcr_ant.tab` file, which were also incorporated into the central IGS ANTEX file. In general, the new antenna entries are mostly limited to devices that meet the IGS reference station criteria, i.e. typical geodetic antennas. However, as the IGS ANTEX file is becoming standard in the GNSS community, more and more requests from companies for consumer-grade devices are being processed, keeping the workload high. Future concepts are to be developed here to ensure improved and efficient processing of the data.

During the year 20025 following model changes have been made to the `igs20.atx`:

1. processed 40 new receiver antenna calibrations;
2. added 19 satellite entries including new satellite antenna entries and constellation changes;
3. issued eleven ANTEX 1.4 releases (GPS weeks: 2343, 2350, 2353, 2354, 2356, 2360, 2361, 2370, 2375, 2385, and 2388).
4. issued corresponding ANTEX 2.0 releases (cf. Section 3) as separated files for satellite and receiver antennas.

### Distribution IGS 20 antenna models using ANTEX version 1.4 and 2.0

We have converted the official `igs20.atx` file to the new format and will update both formats in parallel. To simplify handling and version control, the new ANTEX 2.0 distribution is divided into separate files for satellites and receiving antennas. For satellites, the reference origin remains at the centre of mass (COM). The latest version are available at:

- ANTEX 2.0 format
  - [https://files.igs.org/pub/station/general/igs20\\_sat.atx2.gz](https://files.igs.org/pub/station/general/igs20_sat.atx2.gz)

- [https://files.igs.org/pub/station/general/igs20\\_rcv.atx2.gz](https://files.igs.org/pub/station/general/igs20_rcv.atx2.gz)
- ANTEX 1.4 format
  - <https://files.igs.org/pub/station/general/igs20.atx.gz>

All changes will be published in both versions, the old 1.4 and new 2.0 formats, to ensure a smooth transition in the application software and processing pipelines.

### 3 ANTEX 2.0

After several years of discussion within the community, led by the German Aerospace Center (DLR), the AWG has accomplished the release of the new ANTEX 2.0. After iterating with the AWG community, the final draft was presented to the IGS Governing Board during the December 2025 meeting and has been officially accepted. With that step, the ANTEX 2.0 format has become an official IGS standard.

The ANTEX 2.0 format can be accessed at the following address : [https://files.igs.org/pub/resource/working\\_groups/antenna/ANTEX20.pdf](https://files.igs.org/pub/resource/working_groups/antenna/ANTEX20.pdf) (Montenbruck et al., 2025)

#### Key changes

ANTEX 2.0 introduces structural and metadata-related improvements that aim to separate satellite identification from antenna modeling, reduce duplication, and support additional flexibility such as multiple antennas per satellite. Additionally, the format was extended to support group variations and allowing the allocation of patterns to various frequencies in order to avoid duplications:

- Separating satellite antennas from PRN assignments. The SVN/PRN mapping is managed in the IGS satellite metadata SINEX file ([https://files.igs.org/pub/station/general/igs\\_satellite\\_metadata.snx](https://files.igs.org/pub/station/general/igs_satellite_metadata.snx)), ensuring stable antenna identification independent of PRN changes.
- Support for multiple antennas per satellite (e.g., GLONASS CDMA antenna configurations), allowing antenna transitions or parallel signal paths to be explicitly represented.
- Explicit definition of the satellite reference point (either centre of mass, COM, or antenna reference point, ARP), improving the traceability of PCO/PCV interpretations.
- Frequency grouping for receiver antennas, eliminating the need to duplicate entries for each frequency and thus simplifying file size and maintenance.
- Optional fields for code range corrections and antenna gain patterns, extending the

representable measurement corrections beyond pure phase models.

- expanded signal/frequency mapping and naming aligned with modern GNSS constellations and RINEX 3.X/4.X conventions;

## Implications for users

The transition to ANTEX 2.0 primarily affects file structure and metadata management rather than the physical interpretation of existing PCO/PV models. Users should:

- update ANTEX parsers to handle the 2.0 syntax including frequency grouping, and optional fields (code range corrections, gain patterns);
- source SVN/PRN mappings from the IGS satellite metadata file to ensure correct antenna-to-PRN linkage;

## 4 Antenna Calibration Activities

Within the IGS Antenna Working Group (AWG), we formed a subgroup to conduct and coordinate the IGS antenna ring calibration campaign from 2022 to 2025, covering various types of GNSS receiver antennas. This activity concluded at the end of 2025 with a comprehensive report ([Kersten et al., 2025a](#)). We invited nine calibration institutions and covered both the ROBOT and CHAMBER methods to verify and improve intercomparability and interchangeability.

The objective was to provide an inclusive platform that integrates both IGS-accepted and new GNSS facilities and to conduct a global campaign including all GNSS constellations contributing to the ITRF (GPS, Galileo, BeiDou, GLONASS).

We further aimed to establish plausible benchmark values for the comparability and exchange of receiver antenna calibration values based on common standards and currently accepted facilities. This includes the analysis of individual calibration accuracy and potential systematic error sources. For this campaign, different antenna types representative of IGS network equipment were used. The GNSS receiver antenna test samples have been archived by the providing institutions for later comparisons.

The comparison methodology is based on the analysis of antenna patterns and their impact in the position domain, including processing with two independent GNSS software packages (GipsyX and the IfE GNSS Toolbox). We adopted a multi-GNSS precise point positioning (PPP) approach. Individual solutions for Galileo, GPS, BeiDou, and GLONASS were processed and cross-compared. Recalibration of each of the distributed antennas at the home institutions is currently ongoing.

The findings are summarised in [Kersten et al. \(2025a\)](#) (Version 1.9). Along with the

publication, we provide the corresponding ANTEX dataset (Kersten et al., 2025b) and the related RINEX dataset (Kersten, 2025).

Further technical details are documented in:

- Technical report: IGS Antenna Ring Calibration Campaign: Evaluation report, Version 1.9, Leibniz University Hannover – Institut für Erdmessung, [09/2025], DOI/URL: <http://dx.doi.org/10.15488/18995>, (Kersten et al., 2025a),
- RINEX data release: The RINEX Dataset to the IGS Receiver Antenna Ring Calibration Campaign 2022-2024 (IGS RingCalVal), Zenodo (Community: GNSS for Geodesy, Positioning, Navigation, and Multi-Sensor-Fusions), DOI: <https://doi.org/10.5281/zenodo.16878951>, Kersten (2025),
- ANTEX data release: The ANTEX Dataset to the IGS Receiver Antenna Ring Calibration Campaign 2022-2024 (IGS RingCalVal), Zenodo (Community: GNSS for Geodesy, Positioning, Navigation, and Multi-Sensor-Fusions), DOI: <https://doi.org/10.5281/zenodo.16816983>, (Kersten et al., 2025b).

## References

Tobias Kersten. The rinex dataset to the igs receiver antenna ring calibration campaign 2022-2024 (igs ringcalval), 2025.

Tobias Kersten, Steffen Schön, Andria Bilich, Igor Sutyagin, and Johannes Kröger. IGS Antenna Ring Calibration Campaign: Evaluation report. Technical report, 2025a.

Tobias Kersten, Steffen Schön, Johannes Kröger, Andria Bilich, and Igor Sutyagin. The antex dataset to the igs receiver antenna ring calibration campaign 2022-2024 (igs ringcalval), 2025b.

Oliver Montenbruck, Peter Steigenberger, and Arturo Villiger. ANTEX: the Antenna Exchange Format, Version 2.0s. *IGS Antenna Product Committee*, 2025. URL [https://files.igs.org/pub/resource/working\\_groups/antenna/ANTEX20.pdf](https://files.igs.org/pub/resource/working_groups/antenna/ANTEX20.pdf).



# Precise Point Positioning with Ambiguity Resolution Committee Technical Report 2025

J. Geng<sup>1</sup>, Q. Wen<sup>1</sup>, S. Banville<sup>2</sup>  
Q. Wu<sup>1</sup>, Y. Wang<sup>1</sup>, S. Lyu<sup>1</sup>

<sup>1</sup> State Key Laboratory of Precision Geodesy,  
Chinese Academy of Sciences, Wuhan, China

<sup>2</sup> Canadian Geodetic Survey of Natural Resources Canada, Canada

## 1 Introduction to the BAR Committee

Currently, high-precision Global Navigation Satellite Systems (GNSS) positioning has reached a relatively high level of maturity. A variety of biases are integrated and presented in the form of Observable-Specific Biases (OSB), such as Differential Code Bias (DCB) and Uncalibrated Phase Delay (UPD). The core of high-precision positioning lies in the ambiguity resolution (AR). The most critical bias terms in this process are code and phase biases. In the past, the oversight of code and phase biases was carried out separately by the Bias and Calibration Committee and the Precise Point Positioning with Ambiguity Resolution (PPP-AR) Pilot Project. To further promote the research, development, and application of high-precision GNSS technologies, the International GNSS Service (IGS) established a specialized committee, the BAR Committee, to coordinate the research, standardization, validation, and dissemination of bias products relevant to current GNSS and future constellations.

## 2 The charter of BAR Committee

Over the last decades, GNSS have been deployed in support of positioning, navigation, and timing (PNT) users, as well as Earth-science applications. Originally, GPS receivers track a limited number of frequencies, whose observables are subject to different satellite biases such as well-known P1-P2 and P1-C1 differential code biases. However, with the introduction of multi-GNSS constellations and multi-frequency tracking receivers, the

number of different biases has grown significantly, and their accurate estimation is crucial to future high-integrity and safety-critical applications.

The newly established BAR committee supersedes and consolidates the former PPP -AR Pilot Project and merges with the Bias and Calibration committee. The foreseen activities of the BAR committee have a strong relationship with the clock and ionosphere products. For this reason, it is expected to operate in close collaboration with the Analysis Centre Coordinator (ACC), Real Time Service (RTS), Clock committee, and other relevant IGS entities.

The objects of the BAR committee are divided into three parts. Tasks are defined in continuation of the PPP-AR Pilot Project, integrating fundamental activities carried out by the former Bias & Calibration Committee.

1. Harmonization and methodology consolidations

- Survey existing bias definitions, network estimation strategies, and formats across individual ACs.
- Consolidate existing observable-specific bias (OSB) conventions to accommodate all bias types, and update SINEX\_Bias format if necessary.
- Address issues with datum changes, e.g., at day boundaries, exploiting continuity of the integer carrier phase measurements.
- Assessment of hardware stability, including intra-day variations and potential temperature-dependent effects.
- Definition of a white paper describing the status of satellite and station bias products, which shall also provide clear recommendations in preparation of upcoming LEO-PNT systems and/or signals.

2. Product interoperability and bias combination

- Address issues with availability of satellite products for specific signals and/or frequencies, encouraging and supporting more ACs to estimate multi-GNSS/all-frequency biases.
- Evaluate consistency between code and phase biases, in particular since are often estimated in a cascade approach rather than in a single processing step.
- Cross-validation quality assessment of clocks and biases, and standardize the specification of the product combination statistics in support of ACC and WCC.
- Initiate testing campaigns, open to the community, to evaluate performances and to identify key issues in the combined products.
- Potential development of a clock-bias combination free and open-source software toolbox that will be provide to the IGS community.

3. Ambiguity resolution and integrity monitoring

- Provide best practices for a successful integer-cycle resolution of carrier-phase ambiguities, while defining common misconceptions in the statistical interpretation of ambiguity-fixed solutions.
- Address issues with FDMA-signals, like in GLONASS, due to inter-frequency biases, or in future LEO-PNT systems working on alternative frequency bands, along with potentially accounting for intra-day variations currently neglected (or assumed slowly varying in current systems).
- Establish an integrity monitoring system to detect unmodelled errors and degraded performance during the generation of satellite clock/bias corrections.

### 3 Latest progress of PPP-AR products from each existing AC

In 2025, an additional AC Natural Resources Canada (NRCan) now supports and releases OSB products. The GeoForschungsZentrum Potsdam (GFZ) and Wuhan University (WHU) ACs have also expanded their OSB coverage to include more satellites.

1. EMR include code/phase OSBs in its OPS final products, and its performance has been improved.

During the IGS repro3 campaign, the EMR Analysis Center (AC) developed and validated the clock and bias estimation software SPARKNet. For the period 1996–2020, EMR generated satellite and station clock products, as well as satellite code and phase biases supporting PPP with ambiguity resolution (PPP-AR), based on NGS orbit and station position solutions. The resulting products exhibited performance comparable to those of other IGS Analysis Centers ([Geng et al., 2024](#)).

Following an evaluation of clock product quality obtained with Gipsy-X under the EMR operational tuning and processing strategy, EMR implemented SPARKNet for the routine generation of its operational final clock and bias products. Starting with GPS week 2365, SPARKNet-based products have been used in operational processing. This transition led to reduced satellite clock standard deviation. In addition, EMR provides satellite attitude files in ORBEX format to support consistent satellite attitude modeling by users of the products.

OSB	G080	G01	C1C	2025:304:00000	2025:305:00000	ns	-6.3490	0.0000
OSB	G080	G01	C1W	2025:304:00000	2025:305:00000	ns	-5.2780	0.0000
OSB	G080	G01	C2W	2025:304:00000	2025:305:00000	ns	-8.6926	0.0000
OSB	G080	G01	L1W	2025:304:00000	2025:305:00000	ns	-0.2777	0.0000
OSB	G080	G01	L2W	2025:304:00000	2025:305:00000	ns	-0.0100	0.0000
OSB	G061	G02	C1C	2025:304:00000	2025:305:00000	ns	-9.2790	0.0000
OSB	G061	G02	C1W	2025:304:00000	2025:305:00000	ns	-11.0900	0.0000
OSB	G061	G02	C2W	2025:304:00000	2025:305:00000	ns	-18.2646	0.0000
OSB	G061	G02	L1W	2025:304:00000	2025:305:00000	ns	-0.1794	0.0000
OSB	G061	G02	L2W	2025:304:00000	2025:305:00000	ns	-0.0682	0.0000
OSB	G069	G03	C1C	2025:304:00000	2025:305:00000	ns	7.4987	0.0000
OSB	G069	G03	C1W	2025:304:00000	2025:305:00000	ns	8.1857	0.0000
OSB	G069	G03	C2W	2025:304:00000	2025:305:00000	ns	13.4814	0.0000
OSB	G069	G03	L1W	2025:304:00000	2025:305:00000	ns	-0.0061	0.0000
OSB	G069	G03	L2W	2025:304:00000	2025:305:00000	ns	0.1331	0.0000

Figure 1: Code/phase OSBs in EMR OPS final of NRCan

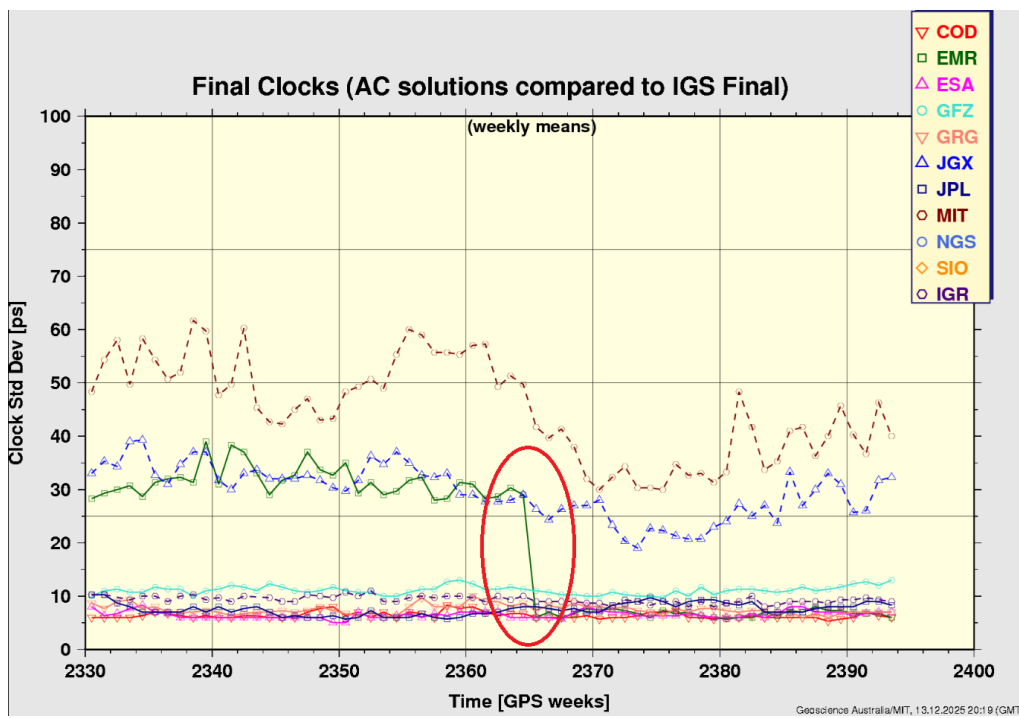


Figure 2: Standard deviations of the IGS final clock combination. The red ellipse at GPS week 2365 indicates the EMR clock improvements resulting from the use of the in-house SPARKNet software

2. WUM MGEX final include QZSS phase OSBs.

The WUM MGEX (Multi-GNSS Experiment) final products now include phase OSBs for the QZSS. This enhancement is significant as it enables PPP-AR for QZSS signals, improving positioning accuracy and convergence time. Presently, WUM is one of only two IGS ACs, alongside CODE, that generate and provide these combined QZSS code and phase OSB products. The accompanying data tables detail the specific OSB values for various QZSS satellites and signals (e.g., C1C, C2X), referenced to a defined time period. The effectiveness of these products is demonstrated by performance metrics showing a 100% ambiguity fixing rate for both wide-lane and narrow-lane components at multiple monitoring stations, confirming the high quality and reliability of WUM’s PPP-AR solution for QZSS.

OSB	JQS2	J02	C1X	2025:250:00000	2025:251:00000	ns	2.5599000000000000	0.101300
OSB	JQS2	J02	C2L	2025:250:00000	2025:251:00000	ns	4.4276000000000000	0.143900
OSB	JQS2	J02	C2X	2025:250:00000	2025:251:00000	ns	4.3218000000000000	0.164800
OSB	JQS2	J02	C5Q	2025:250:00000	2025:251:00000	ns	3.0290000000000000	0.114700
OSB	JQS2	J02	C5X	2025:250:00000	2025:251:00000	ns	2.3891000000000000	0.125100
OSB	JQS2	J02	L1X	2025:250:00000	2025:251:00000	ns	-2.767264139528239	0.736214
OSB	JQS2	J02	L2X	2025:250:00000	2025:251:00000	ns	-4.557530300906368	0.722094
OSB	JQS4	J03	C1C	2025:250:00000	2025:251:00000	ns	0.7591000000000000	0.091100
OSB	JQS4	J03	C1X	2025:250:00000	2025:251:00000	ns	0.5290000000000000	0.101200
OSB	JQS4	J03	C2L	2025:250:00000	2025:251:00000	ns	1.1600000000000000	0.144000
OSB	JQS4	J03	C2X	2025:250:00000	2025:251:00000	ns	0.9614000000000000	0.164800
OSB	JQS4	J03	C5Q	2025:250:00000	2025:251:00000	ns	1.4340000000000000	0.114700
OSB	JQS4	J03	C5X	2025:250:00000	2025:251:00000	ns	0.5141000000000000	0.123900
OSB	JQS4	J03	L1X	2025:250:00000	2025:251:00000	ns	-1.031168151728678	0.736181
OSB	JQS4	J03	L2X	2025:250:00000	2025:251:00000	ns	-1.698276658777592	0.722003
OSB	JQS5	J04	C1C	2025:250:00000	2025:251:00000	ns	-1.5189000000000000	0.120600
OSB	JQS5	J04	C1X	2025:250:00000	2025:251:00000	ns	-0.4917000000000000	0.171500
OSB	JQS5	J04	C2X	2025:250:00000	2025:251:00000	ns	-0.8418000000000000	0.277200
OSB	JQS5	J04	C5X	2025:250:00000	2025:251:00000	ns	-2.4695000000000000	0.198600
OSB	JQS5	J04	L1X	2025:250:00000	2025:251:00000	ns	0.541159295835122	0.840516
OSB	JQS5	J04	L2X	2025:250:00000	2025:251:00000	ns	0.891259295835122	0.983614
OSB	JQS3	J07	C1C	2025:250:00000	2025:251:00000	ns	-2.6909000000000000	0.099600
OSB	JQS3	J07	C1X	2025:250:00000	2025:251:00000	ns	-3.0015000000000000	0.113700
OSB	JQS3	J07	C2L	2025:250:00000	2025:251:00000	ns	-4.5315000000000000	0.158500
OSB	JQS3	J07	C2X	2025:250:00000	2025:251:00000	ns	-4.8437000000000000	0.185700
OSB	JQS3	J07	C5Q	2025:250:00000	2025:251:00000	ns	-3.6423000000000000	0.125800
OSB	JQS3	J07	C5X	2025:250:00000	2025:251:00000	ns	-4.6586000000000000	0.136700

Figure 3: QZSS phase OSBs in WUM MGEX final of WHU

Table 1: Ambiguity fixing rates for QZSS

Station	Wide lane	Narrow lane
AIRA	100	100
GMSD	100	100
STK2	100	100

3. GFZ MGEX rapid and GRG MGEX final include phase OSBs for new BDS satellites C47-C50.

GFZ MGEX rapid and GRG MGEX final products have incorporated code and phase OSBs for the newer BDS satellites with PRN numbers C47 through C50, which is a prerequisite for enabling PPP-AR for these satellites. This inclusion allows users to correct the observable-specific signal biases and attempt to fix integer ambiguities for the affected satellites. However, initial performance assessment using GFZ's products indicates that the narrow-lane ambiguity fixing rates for C47-C50 are relatively low at several global monitoring stations. For instance, at stations BRUX and TLSG, while wide-lane fixing rates are excellent (98-100%), the narrow-lane rates are 66% and 74%, respectively. At stations CEDU and KIRU, the rates are lower, at 59% and 57%. This suggests that while the necessary bias products are available, further refinement in the underlying orbit, clock, or bias estimation for these newer satellites may be required to achieve consistently high integer fix rates comparable to established constellations, highlighting an area for ongoing product improvement.

OSB	C232	C50	C2I	2025:282:00000	2025:283:03600	ns	-56.0418	0.9156
OSB	C232	C50	C6I	2025:282:00000	2025:283:03600	ns	-84.8746	1.3867
OSB	C232	C50	L2I	2025:282:00000	2025:283:03600	ns	57.0333	0.9163
OSB	C232	C50	L6I	2025:282:00000	2025:283:03600	ns	86.3762	0.9163
OSB	C233	C48	C2I	2025:282:00000	2025:283:03600	ns	-3.0051	0.9284
OSB	C233	C48	C6I	2025:282:00000	2025:283:03600	ns	-4.5512	1.4061
OSB	C233	C48	L2I	2025:282:00000	2025:283:03600	ns	3.2856	0.9291
OSB	C233	C48	L6I	2025:282:00000	2025:283:03600	ns	4.9761	0.9291
OSB	C234	C47	C2I	2025:282:00000	2025:283:03600	ns	-1.4354	0.8937
OSB	C234	C47	C6I	2025:282:00000	2025:283:03600	ns	-2.1739	1.3536
OSB	C234	C47	L2I	2025:282:00000	2025:283:03600	ns	0.9577	0.8945
OSB	C234	C47	L6I	2025:282:00000	2025:283:03600	ns	1.4504	0.8945
OSB	C235	C49	C2I	2025:282:00000	2025:283:03600	ns	3.3350	0.9562
OSB	C235	C49	C6I	2025:282:00000	2025:283:03600	ns	5.0509	1.4482
OSB	C235	C49	L2I	2025:282:00000	2025:283:03600	ns	-2.3269	0.9569
OSB	C235	C49	L6I	2025:282:00000	2025:283:03600	ns	-3.5240	0.9569

**Figure 4:** Code/phase OSBs for C47-C50 in GFZ MGEX rapid

### 3 Latest progress of PPP-AR products from each existing AC

OSB C234 C47	C1P	2025:282:00000	2025:282:86399	ns	-17.6765	0.5573
OSB C234 C47	C5P	2025:282:00000	2025:282:86399	ns	-31.6487	0.5841
OSB C234 C47	C1X	2025:282:00000	2025:282:86399	ns	-25.9551	6.4662
OSB C234 C47	C5X	2025:282:00000	2025:282:86399	ns	-46.4945	11.5672
OSB C234 C47	L1P	2025:282:00000	2025:282:86399	ns	15.9148	0.4784
OSB C234 C47	L5P	2025:282:00000	2025:282:86399	ns	28.5395	0.6996
OSB C234 C47	L1X	2025:282:00000	2025:282:86399	ns	24.1934	6.4599
OSB C234 C47	L5X	2025:282:00000	2025:282:86399	ns	43.3853	11.5736
OSB C233 C48	C1P	2025:282:00000	2025:282:86399	ns	58.8819	0.5719
OSB C233 C48	C5P	2025:282:00000	2025:282:86399	ns	105.7057	0.5983
OSB C233 C48	C1X	2025:282:00000	2025:282:86399	ns	50.3572	6.4668
OSB C233 C48	C5X	2025:282:00000	2025:282:86399	ns	90.4186	11.5668
OSB C233 C48	L1P	2025:282:00000	2025:282:86399	ns	-62.7949	0.4880
OSB C233 C48	L5P	2025:282:00000	2025:282:86399	ns	-112.6082	0.7205
OSB C233 C48	L1X	2025:282:00000	2025:282:86399	ns	-54.2702	6.4599
OSB C233 C48	L5X	2025:282:00000	2025:282:86399	ns	-97.3211	11.5738
OSB C235 C49	C1P	2025:282:00000	2025:282:86399	ns	-16.2489	0.5608
OSB C235 C49	C5P	2025:282:00000	2025:282:86399	ns	-29.1915	0.5851
OSB C235 C49	C1X	2025:282:00000	2025:282:86399	ns	-24.4529	6.4660
OSB C235 C49	C5X	2025:282:00000	2025:282:86399	ns	-43.9035	11.5663
OSB C235 C49	L1P	2025:282:00000	2025:282:86399	ns	16.0548	0.4801
OSB C235 C49	L5P	2025:282:00000	2025:282:86399	ns	28.7906	0.7033
OSB C235 C49	L1X	2025:282:00000	2025:282:86399	ns	24.2588	6.4595
OSB C235 C49	L5X	2025:282:00000	2025:282:86399	ns	43.5026	11.5729
OSB C232 C50	C1P	2025:282:00000	2025:282:86399	ns	63.2448	0.6214
OSB C232 C50	C5P	2025:282:00000	2025:282:86399	ns	113.3611	0.6419
OSB C232 C50	C1X	2025:282:00000	2025:282:86399	ns	54.5828	6.4716
OSB C232 C50	C5X	2025:282:00000	2025:282:86399	ns	97.8278	11.5695
OSB C232 C50	L1P	2025:282:00000	2025:282:86399	ns	-66.6548	0.5197
OSB C232 C50	L5P	2025:282:00000	2025:282:86399	ns	-119.5300	0.7886
OSB C232 C50	L1X	2025:282:00000	2025:282:86399	ns	-57.9928	6.4626
OSB C232 C50	L5X	2025:282:00000	2025:282:86399	ns	-103.9967	11.5785

**Figure 5:** Code/phase OSBs for C47-C50 in GRG MGEX rapid

**Table 2:** Ambiguity fixing rates for C47-C50 (GFZ/GRG)

Station	Wide lane	Narrow lane
BRUX	100/98	66/100
TLSG	100/98	74/100
CEDU	91/100	59/100
KIRU	89/89	57/88


## 4 The updates of product combination and validation in BAR committee

Products from a potential AC at HUS have been incorporated into the combination, and since this year, BDS-3 has also been included for the final PPP-AR product combination and validation. Besides, an inspection of the combination results has been carried out to identify and report any product issues.


1. A potential AC's products from HUS have been included into the combination since last year.

During the past year, the BAR Committee continued the routine combination and validation of PPP-AR products, with several important updates focusing on AC participation, multi-GNSS capability, and product quality inspection.

Products of HUS have been evaluated as a potential contribution to the routine combination. Following consistency checks and PPP-AR performance validation, HUS rapid and final products have been formally included in the combination. The HUS products provide GPS, Galileo, BDS-2, and BDS-3 clock and code/phase bias corrections, increasing the redundancy of contributing ACs, especially for BDS. Statistical analyses indicate that HUS products show consistency comparable to existing ACs and contribute stably to both rapid and final combined solutions.

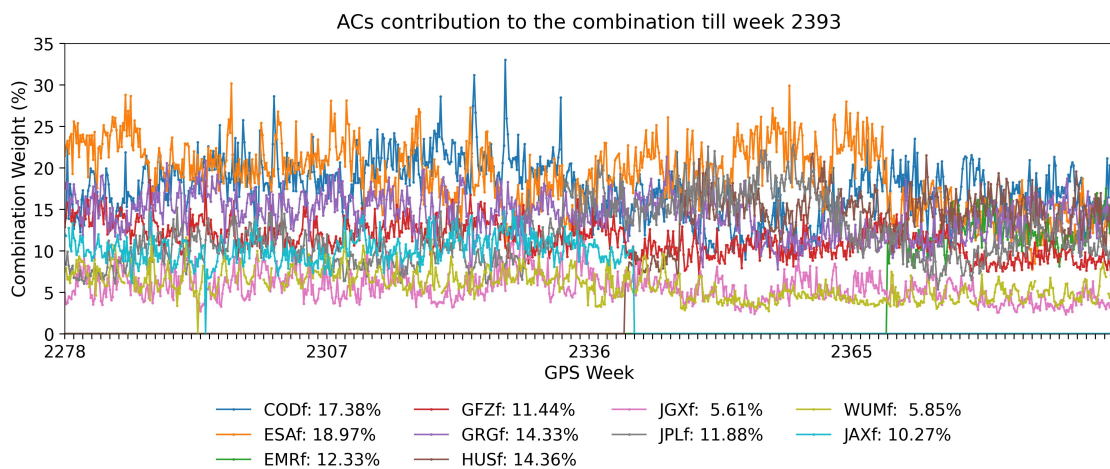


**Figure 6:** ACs contribution to the Final products combination from week 2278 to 2393

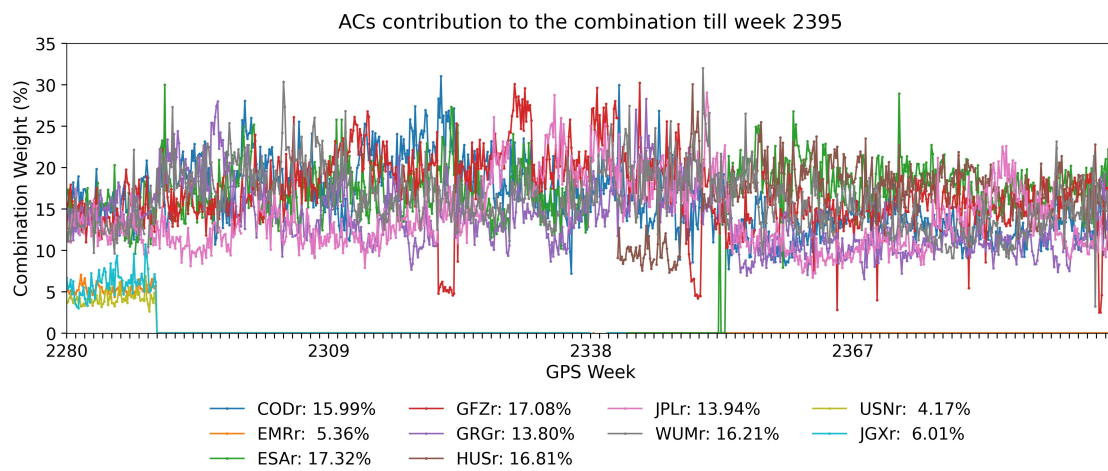

**Figure 7:** ACs contribution to the Final products combination from week 2278 to 2393

2. BDS-3 is included for the final PPP-AR product combination and validation since this year.


Another major update is the inclusion of BDS-3 satellites in the final PPP-AR product combination and validation. With an increasing number of ACs providing high-quality BDS-3 clock and bias products, BDS-3 has been successfully integrated into the final combined products. The BDS consistency of the clock and bias combination for all products is shown below.

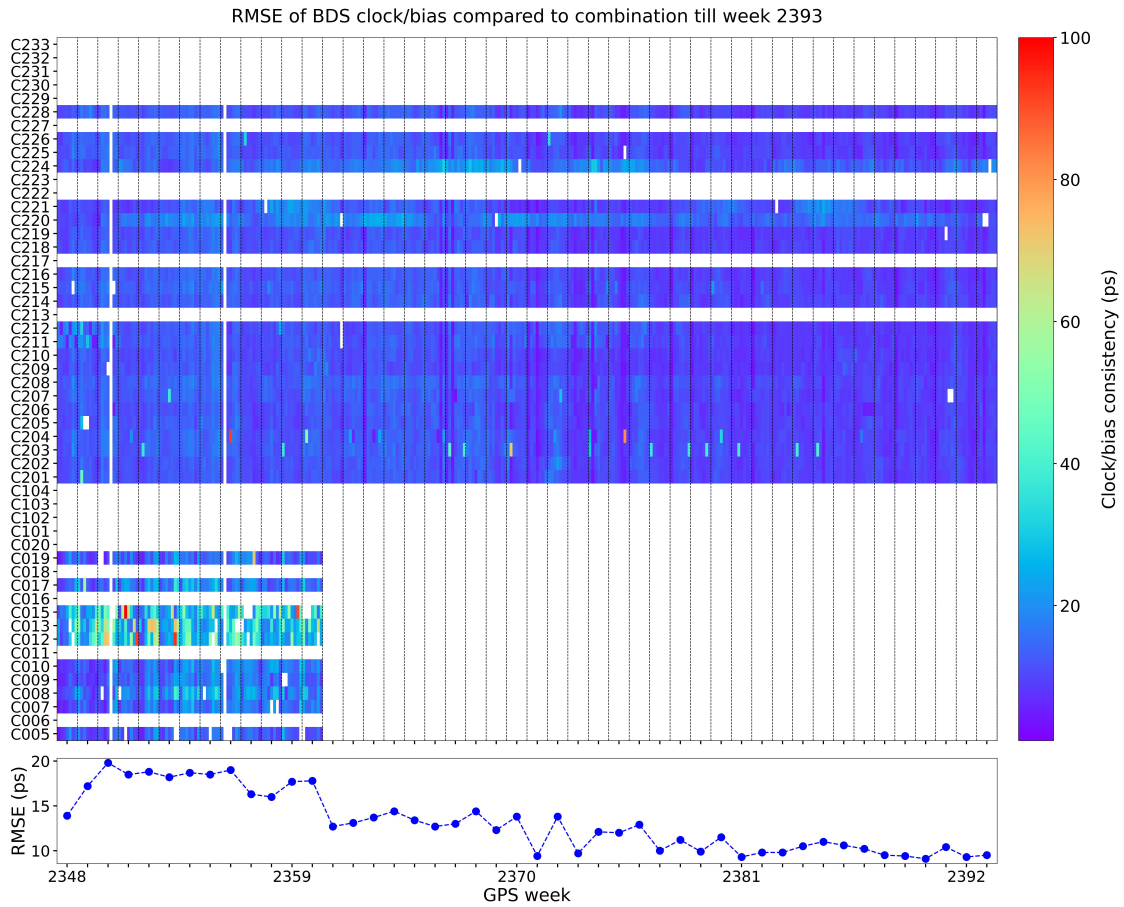

**Figure 8:** BDS clock/bias combination consistency of Final products over the year 2025

3. Inspection to the combination results to find and report some product issues.

Routine inspections of the combination results have been carried out to identify potential product issues. The GPS/Galileo/BDS data with a sampling interval of 300 s from 10 globally distributed stations are processed for PPP-AR in a static mode. The fixing rate and position precision of each single constellation solution are presented in the Fig. 9. By analyzing residuals, weights, and satellite-dependent consistency patterns, several issues related to individual AC products were detected, such as the ANTEX indicator in CODE’s products, where listing only “IGS20” instead of the exact ANTEX file version led to inaccurate positioning issues.

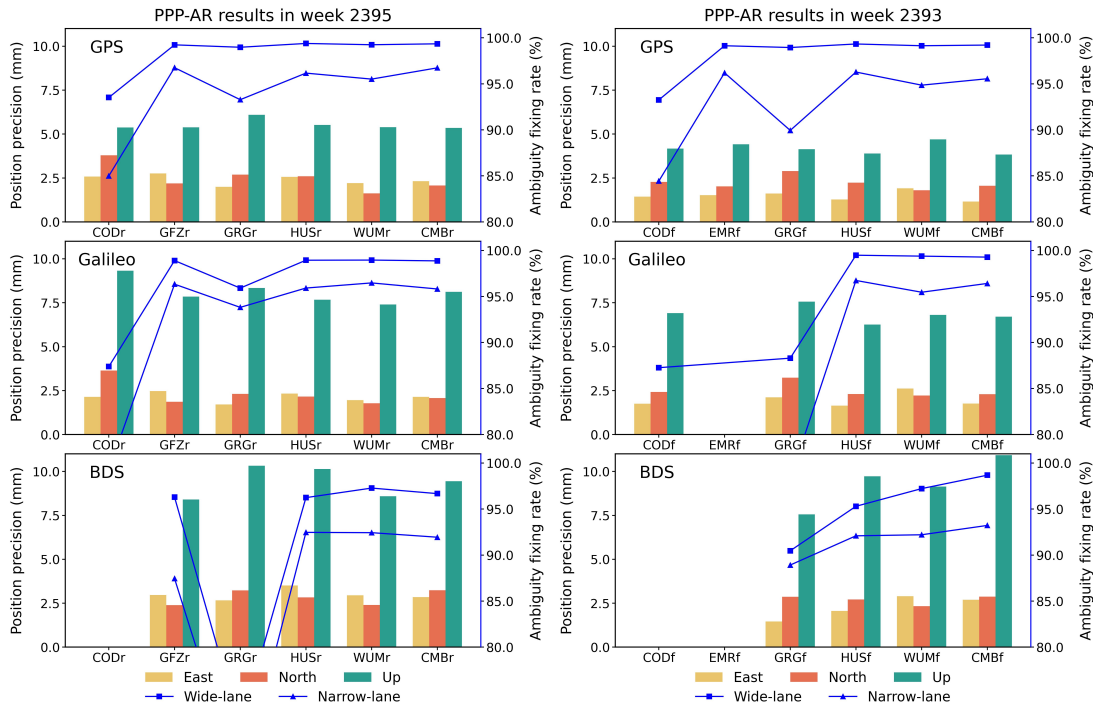

**Figure 9:** Ambiguity fixing rates and position precision for PPP-AR static solutions (Rapid products for the left panel, Final products for the right panel)

## 5 The kick-off meeting of BAR committee

On October 29, 2025 (UTC), the IGS BAR Committee convened its kick-off meeting. The BAR Committee, which integrates the former “Bias & Calibration Working Group” and “the PPP-AR Pilot Project”, has its core objective of coordinating the research, standardization, validation, and dissemination of satellite bias products for existing GNSS and future LEO satellites. Researcher Jianghui Geng from the PRIDE Research Group chaired

the kick-off meetings.

Dr. Wen Qiang from the PRIDE Research Group delivered a report titled Progress Report of the PPP-AR Pilot Project for 2024/2025, reviewing the work of the PPP-AR Pilot Project over the past year regarding orbit/clock/biases products. This year, BDS-3 PPP-AR product was included in the final combined product, thanks to the release of the HUS final BDS products. PPP-AR products from other Analysis Centers (ACs) of the IGS have also been updated. Specifically, EMR provides GPS code and phase OSBs in its OPS final products. WUM's MGEX final products include QZSS phase OSBs, while GFZ MGEX rapid and GRG MGEX final products include code and phase OSBs for BDS satellites with PRN numbers higher than C46 (C47-C50).

Additionally, during the meeting, Lotfi Massarweh from Delft University of Technology introduced the background, core objectives, work tasks, and charter of the newly established BAR Committee. Peter Steigenberger from the German Aerospace Center shared his research findings on the impact of GPS Flexible Power on the continuity of DCB estimation. Dr. Jiang Guo from the International Bureau of Weights and Measures presented his research on time transfer using continuous precise products.

In the final discussion session of the meeting, participants focused on the future core work directions, technical challenges, and user needs of the IGS-BAR Committee. Key topics included GNSS flexible power, day-boundary bias handling methods, phase biases quality, and the development of the BAR official website.

Over 60 experts, scholars, and researchers in the field of GNSS precise positioning from around the world attended the kick-off meeting. Through this meeting, all participants gained a clearer understanding of the BAR Committee's work directions, PPP-AR technology progress, and the application of biases products. This will provide important guidance for the subsequent upgrade of GNSS high-precision services and the support for the development of LEO system.

## References

- Geng, J., Yan, Z., Wen, Q., Männel, B., Masoumi, S., Loyer, S., Mayer-Gürr, T., and Schaer, S. Integrated satellite clock and code/phase bias combination in the third IGS reprocessing campaign. *GPS solutions*, 28(3), 150. doi: <https://doi.org/10.1007/s10291-024-01693-9>
- Lin J, Geng J, Zhang Q (2025). Aligning GPS/Galileo/BDS satellite integer clock products across day boundaries for continuous time and frequency transfer. *Journal of Geodesy*, 99(5), 35.
- Zhang, Q., Geng, J., Li, G. et al. Aligning the Galileo code biases on the pilot and mixed

- signal channels to improve precise point positioning. *GPS Solut* 29, 75 (2025). doi: <https://doi.org/10.1007/s10291-025-01838-4>
- Li Junqiang, Sehngyi Xu, Jing Guo, et al. Multi-GNSS and Multi-Frequency Precise Point Positioning Based on High Accuracy Products from IGS Analysis Centers [J]. *Geomatics and Information Science of Wuhan University*, 2025, doi: DOI:10.13203/J.whugis20240430
- Deng Zhiguo, Jungang Wang, Maorong Ge. The GBM rapid product and the improvement from undifferenced ambiguity resolution [J]. *Acta Geodaetica et Cartographica Sinica*, 2022, 51 (4): 544-555



# Clock Products Committee

## Technical Report 2025

Michael J. Coleman<sup>1</sup>

<sup>1</sup> Chair of Clock Products Committee  
US Naval Research Laboratory

The Clock Products Committee (CPC) consists of IGS members who are: involved with the production of the IGS's GNSS clock solutions, researchers and/or operators at prominent IGS sites serving at UTC( $k$ ) sites, or key users and stakeholders of clock products from the IGS. This report contains a summary of the current products as well as current topics of interest to timing.

## 1 Charter and Membership

Since the last contribution to the Technical Report, this group has been changed from the Clock Products Working Group (CPWG) to the CPC. This follows a general reorganization within the IGS that yielded across-the-board reclassification of Working Groups, Committees and Pilot Projects. As the CPC is responsible for maintaining the core rapid and final clock products, it was decided that this group would become a committee. There have been no substantive changes to the charter otherwise since its 2019 update.

This committee continues to consist of ex-officio members (those holding other roles within the IGS); representative members (specifically from Analysis Centers or IGS Timing Sites); and at-large members. Representative members are often appointed by the Analysis Center or IGS site to be representatives to the working group. The collection of at-large members is intended to fill or expand the expertise base of the group based on current or on-going activities. The group also strives to maintain a diverse membership both academically and geopolitically. Table 1 shows the current membership as of December 2025. New members are identified with a dagger symbol. There are a few important points to note.

- Jian Yao is elected to the vice chair role of the committee.

**Table 1:** CPC membership as of December 2025; † represents new member.

Member	Representing	Affiliation
Michael Coleman	Chair	US Naval Research Laboratory
Jian Yao	Vice Chair	St. Louis University
Salim Masoumi	IGS ACC	Geoscience Australia
Patrizia Tavella	BIPM Rep to GB	BIPM Time Department
Allison Craddock	IGS Central Bureau Rep	Jet Propulsion Laboratory
Rolf Dach	AC Rep // COD	Astronomical Institute – Univ of Bern (AIUB)
Vacant	AC Rep // EMR	Natural Resources Canada
Vacant	AC Rep // ESA	ESA / European Space Operations Center
Flavien Mercier	AC Rep // GRG	Centre National D’Etudes Spatiales (CNES)
Keitaro Ohno †	AC Rep // JGX	Geospatial Info. Authority (GSI) of Japan
Paul Ries	AC Rep // JPL	Jet Propulsion Laboratory
Thomas Herring	AC Rep // MIT	Massachusetts Institute of Technology
Sharyl Byram	AC Rep // USN	US Naval Observatory
Li Min	AC Rep // WHU	Wuhan University
Pascale Defraigne	IGS Site Rep // BRUX	Royal Observatory of Belgium
Ilaria Sesia	IGS Site Rep // IENG	INRiM
Shinn Yan Lin	IGS Site Rep // TWTF	Chungwa Telecommunications
Ignacio Romero	At Large Member	Canary Space Consulting (ESA/ESOC)
Giulio Tagliaferro	At Large Member	BIPM Time Department
Thayatip Thongyan †	At Large Member	National Metrological Institute of Thailand

- Keitaro Ohno is appointed the representative of JGX to the committee.
- Thayatip Thongyan joins the group as an at-large member in 2024.
- Allison Craddock is no longer in the CB or at JPL, so a new CB representative will be sought at the 2026 Workshop in Santiago.

## 2 Current Product Operations

The IGS final and rapid clock products are combinations of solutions from contributing IGS Analysis Centers (ACs). The combination software makes daily evaluations of each solution and weights each AC contribution based upon the solution precision. The RMS and standard deviation statistics as well as weight of each of AC solution is contained in Table 2. These statistics comprise a median of the daily statistics taken over the calendar years 2024 and 2025.


Corresponding plots of the standard deviations are shown in Figure 1 for both rapid and final clocks but only for those ACs contributing weight. Note that the precision level of each AC generally holds around the same level with the exception of rare dates where an outlier in the solution precision is found.

**Table 2:** Quality of clock solution contributions from IGS Analysis Centers.  
Median RMS and Standard Deviation statistics over the 2024 – 2025 calendar years.

AC	Rapid Clock Product			Final Clock Product		
	Med Daily RMS (ps)	Med Daily StDev (ps)	Med Daily Weight	Med Daily RMS (ps)	Med Daily StDev (ps)	Med Daily Weight
COD	138.7	8.1	19.7 %	86.8	5.3	21.4 %
EMR	94.2	22.1	6.0 %	105.2	6.2	12.2 %
ESA	125.2	8.0	16.1 %	65.1	5.3	20.9 %
GFZ	113.7	11.6	12.4 %	88.9	10.6	10.5 %
GRG	112.7	9.8	17.0	130.2	6.3	17.2 %
JGX	102.4	25.0	6.2 %	74.9	30.4	0.0 %
JPL	94.8	10.7	14.8 %	71.6	7.2	17.8 %
MIT				70.1	43.2	0.0 %
NGS	799.0	522.3	0.0 %	828.5	520.5	0.0 %
USN	147.8	76.2	0.0 %			
WHU	93.8	15.7	8.9 %			

The current core rapid and final products contain a subset of the IGS network station clocks as well as all GPS satellite clocks. While some ACs generate solutions for GLONASS, Galileo and/or Beidou, those clocks are not yet part of the main core products. On-going work for the multi-GNSS clock products aims to bring these towards production soon after the Analysis Center Coordinator (ACC) transition in 2026.

**Figure 1:** Time series of clock solution precision for weighted AC contributions.

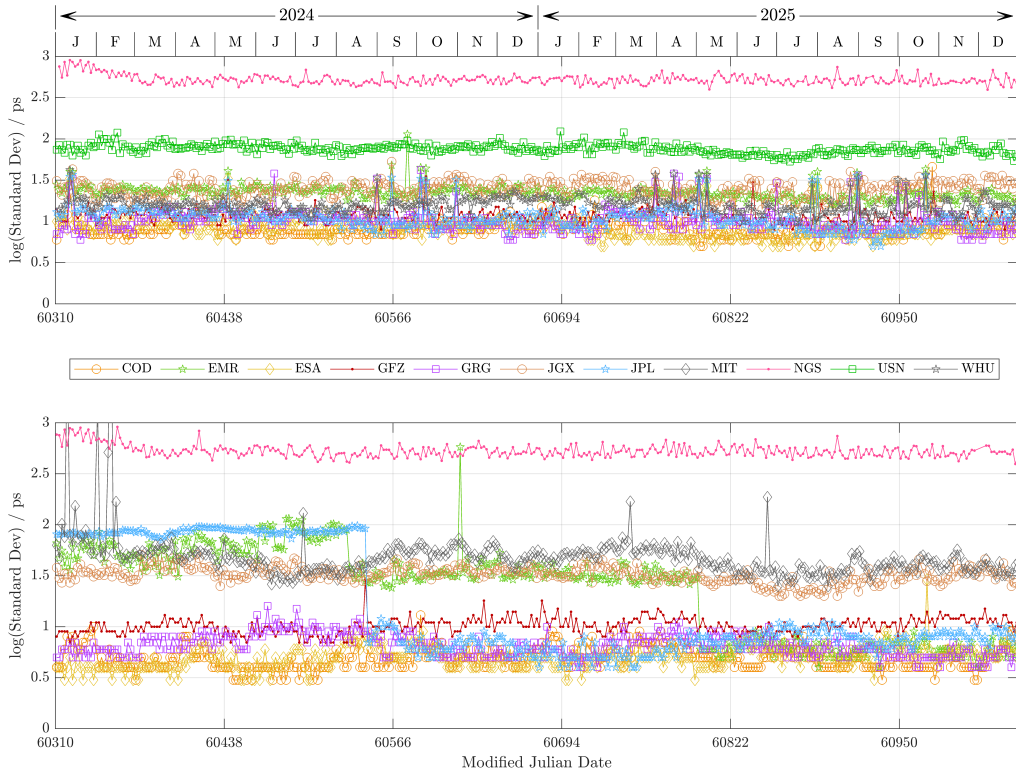

### 3 Clock Exchange Format

This file format is under work and review presently. It will be a slight departure in format from the existing Clock Rinex format series since more constellations and combinations of both clocks and signals may be present in one given file. New header records and the new data record format will ultimately allow additional information including:

- allowance for different types of clock data in a single file including: analysis, observation, prediction, interpolation, discontinuity and hardware bias records, and
- option to report clock solutions based on more than one frequency pair combinations.

Dr. Jian Yao presented the planned file updates to the BIPM’s Consultative Committee on Time and Frequency (CCTF) that convened in September 2025. The IGS is a liaison to this committee.

## 4 External Activities

There have been several hot topics in the area of precise time over the past five years. Several task groups were established at the BIPM to discuss solutions or policy recommendations regarding them. These topics included: redefinition of the SI second, traceability of UTC from GNSS, time and frequency dissemination and timescales, and a consensus for a continuous UTC timescale. Two of these are important to the IGS: traceability of UTC from GNSS and the consensus towards a continuous UTC. A summary of the Task Group on UTC traceability from GNSS was documented in [Defraigne et al. \(2022\)](#). Work towards continuous UTC is expected to be completed this year.

### 4.1 Continuous UTC

Since 1972, UTC takes a scheduled insertion of one leap second whenever necessary to maintain the tolerance

$$| \text{UT1} - \text{UTC} | < 0.9 \text{ sec.}$$

Since this induces a discontinuity in UTC, efforts to end this practice have been ongoing at the ITU-R. This issue has a wide influence and involves many nations, scientific disciplines and operational outfits; see [Levine et al. \(2023\)](#) and [Beard \(2023\)](#). Hence, converging upon an agreed approach has been challenging.

The BIPM convened a Task Group on Continuous UTC in 2023 to recommend a new tolerance for the offset of UT1 – UTC and date for implementation. Following a two year survey of stakeholders throughout the metrological, scientific, industrial and financial sectors, the group came to an agreement on a new tolerance of 1 hour. This decision was made with the explicit understanding that

- compromise would be required and almost all parties affected by this decision would have some changes, corrections, or modifications that are needed to their systems;
- the potential installment of a negative leap second under the current paradigm would be an extremely risky undertaking and is worth avoiding;
- the need for continuous UTC in many technological and scientific areas was beginning to push users towards other existing timescales that are continuous, such as GPST;
- implementation of this new tolerance should be taken sooner than the original recommended date of 2035 to avoid future leap seconds– positive or negative.

The final recommendation from the Task Group recommended a 1 hour tolerance for UT1 – UTC be adopted and that this take effect on 20 May 2027. This recommendation is now the subject of Draft Resolution C for the 28th General Conference on Weights and Measures in October 2026 ([CGPM Resolutions, 2026](#)).

In the event that this resolution is adopted, there will be no further insertion of leap seconds

for the foreseeable future of humanity. Existing offsets between timescales, however, will likely persist into the future. GNSS providers including GPS, Galileo and Beidou did confirm that they are unlikely to change the number of leap seconds presently included in their timescales to match UTC even if UTC becomes continuous. The costs to make such a change are too drastic compared to the benefits that might be gained.

## References

- Defraigne Pascal and others (2022). Achieving Tracability to UTC through GNSS Measurements, *Metrologia* 59(6).
- Levine J., P. Tavella, and M. Milton (2023). Towards a consensus on a continuous coordinated universal time, *Metrologia* 60(1).
- Beard Ronald L. (2011). Role of the ITU-R in time scale definition and dissemination, *Metrologia* 48 125–131.
- CGPM (2026). Résolutions de la Conférence générale des Poids et Mesures (28<sup>e</sup> reunion), Comité International des poids et mesures, <https://www.bipm.org/documents/d/guest/cgpm-2026-draft-resolutions>, 13 – 15 October 2026.

# GNSS Monitoring Pilot Project Technical Report 2025

E. Schönemann

Navigation Support Office at ESA/ESOC  
Robert-Bosch-Str. 5  
64293 Darmstadt, Germany  
erik.schoenemann@esa.int, +49 (0) 6151 90 2653

## 1 Introduction

Since 2019, ESA is chairing the [GNSS Monitoring Pilot Project](#), supporting development and leading coordination among the IGS Monitoring Analysis Centres (MACs). As part of the UN International GNSS Monitoring and Assessment (IGMA) Pilot Project, a monitoring system for all GNSS constellations is developed, implementing specialised processing systems to convert navigation messages, benchmark them against precise reference products, and assess compliance with ICD performance standards. To ensure comparability across centres, the IGMA Calculation Methodology was formalised. In 2025, the Pilot Project presented preliminary results for agreed evaluation periods (1–31 August 2022; for UTCOE: 1 September 2021–31 August 2022). The results cover PDOP, orbit and clock errors, SISRE, and UTCOE. Comparisons among the MACs and against the other participants in IGMA showed good agreements.



# Ionosphere Committee Technical Report 2025

A. Krankowski<sup>1\*</sup>, Z. Li<sup>2†</sup>, M. Hernández-Pajares<sup>3</sup>,  
A. Froń<sup>1</sup>, N. Wang<sup>2</sup>

- 1 Space Radio-Diagnostics Research Centre  
University of Warmia and Mazury in Olsztyn, Poland (SRRC/UWM)
- 2 Aerospace Information Research Institute,  
Chinese Academy of Sciences (AIR/CAS), Beijing, China
- 3 UPC–IonSAT, Barcelona, Spain

## 1 General goals

The Ionosphere Committee started the routine generation of the combine Ionosphere Vertical Total Electron Content (TEC) maps in June 1998. This has been the main activity so far performed by the eight IGS Ionosphere Associate Analysis Centers (IAACs): CODE/Switzerland, ESOC/Germany, JPL/ U.S.A, UPC/Spain, CAS/China, WHU/China, NRCan/Canada and OPTIMAP/Germany. Independent computation of rapid and final VTEC maps is used by each analysis center: Each IAAC computes the rapid and final TEC maps independently and with different approaches. Their GIMs are used by the UWM/Poland, since 2007, to generate the IGS combined GIMs. Since 2015 UWM/Poland generate also IGS TEC fluctuations maps.

---

\*Chair of Ionosphere Committee

†Vice-Chair of Ionosphere Committee

## 2 Membership

1. Mahdi Alizadeh (TU Berlin and K.N.Toosi University of Technology Tehran)
2. Dieter Bilitza (GSFC/NASA)
3. Claudio Cesaroni (INGV)
4. M. Codrescu (SEC)
5. Anthea Coster (MIT)
6. Joachim Feltens, Telespazio (ESA/ESOC)
7. Mariusz Figurski (TU Gdansk)
8. Pawel Flisek (UWM)
9. Adam Froń (UWM)
10. Alberto Garcia-Rigo (UPC)
11. Reza Ghoddousi-Fard (NRCan)
12. Manuel Hernandez-Pajares (UPC)
13. Pierre Heroux (NRCan)
14. Norbert Jakowski (DLR)
15. Attila Komjathy (JPL)
16. Andrzej Krankowski (UWM)
17. Kacper Kotulak (UWM)
18. Richard B. Langley (UNB)
19. Zishen Li (CAS)
20. Qi Liu (Henan University)\*
21. Haixia Lyu (Wuhan University)
22. Camille Martire (JPL)
23. Angelyn Moore (JPL)
24. Raul Orus (ESTEC)
25. Michiel Otten, PosiTim (SA/ESOC)
26. Ola Ovstedal (UMB)
27. Babatunde Rabiun (NSRDA, Nigeria)
28. Vergados Panagiotis (JPL)
29. Ignacio Romero, CSC (ESA/ESOC)
30. Stefan Schaer (CODE)
31. Michael Schmidt (DGFI-TUM)
32. Shuli Song (SHAO)\*
33. Tim Springer, PosiTim (ESA/ESOC)
34. David R. Themens (University of Birmingham)
35. M. Sithartha Muthu Vijayan (CSIR 4PI)
36. Ningbo Wang (CAS)
37. Rene Warnant (ULiège)
38. Robert Weber (TU Wien)
39. Pawel Wielgosz (UWM)
40. Brian Wilson (JPL)
41. Chao Xiong (WHU)\*
42. Junchen Xue (CAS)
43. Yunbin Yuan (CAS)
44. Qiang Zhang (WHU)\*
45. Qile Zhao (WHU)

\* elected in 2025

## 3 Key Issues

- a Activities of eight IGS Ionosphere Associated Analysis Centres regarding GIMs: CODE, UPC, ESA, JPL, NRCan, CAS, WHU, OPTIMAP (GIMs) and works on inclusion of Shanghai Observatory (SHAO) as a new IAAC.
- b Activities of UWM IAAC regarding ROTI maps.
- c IGS real-time service for global ionospheric total electron content modeling.
- d IGS ROTI Maps: Current Status and Its Extension towards Equatorial Region and Southern Hemisphere.

- e Towards Cooperative Global Mapping of the Ionosphere: Fusion Feasibility for IGS and IRI with Global Climate VTEC Maps.
- f Cooperation with International LOFAR Telescope (ILT) for potential synergies.
- g Creation of 2 new Study Groups: “Ionospheric Mapping Function” and “New Methodology for Combining IGS Ionospheric products”.
- h Moving towards real-time multi-constellation ionosphere products including VTEC maps, ROTI maps, scintillation products.

## 4 Current IGS ionosphere products

### 4.1 IGS combined global ionospheric maps (GIM)

Currently the VTEC combined maps in the IONEX format include:

- Final solution with  $\approx 11$  days latency and weekly updates
- Rapid solution with less than 24-hour latency and daily updates

Both products are arranged in grid maps with resolution of 5 deg (longitude) by 2.5 deg (latitude) and 2 hours in time. However the products elaborated by different IAACs may have different temporal resolution – from 15 minutes up to 2 hours.

The draft Real-Time combined product based on the four IAACs (prepared in cooperation with the Real-Time IGS WG) is also provided.

All information about validation, evaluation and combination of the products can be found at the Ionosphere Committee webpage (<https://igsiono.uwm.edu.pl/>).

### 4.2 IGS ROTI fluctuation maps for the Northern hemisphere

Since 2014 UWM provides the IGS diurnal ROTI maps to characterize ionospheric irregularities occurrence over the Northern hemisphere.

Currently the ROTI fluctuation product is being expanded to cover also the Southern hemisphere and equatorial region with use of over 1200 ground-based GNSS permanent stations.

### 4.3 Ionospheric products

Ionospheric products are available through CDDIS:

<https://cddis.nasa.gov/archive/gnss/products/ionex/YYYY/DDD/>  
where YYYY is the year and DDD – the day of the year identification

**Table 1:** Available products with their old and new filenames.

File type	Old short name	New long name
Final combined IONEX	igsgddd0.yyi.Z	IGS00PSFIN_yyyyddd0000_01D_02H_GIM.INX.gz
Rapid combined IONEX	igrghddd0.yyi.Z	IGS00PSRAP_yyyyddd0000_01D_02H_GIM.INX.gz
ROTI (Northern hemisphere)	rotidddd0.yyf.Z	IGS00PSFIN_yyyyddd0000_01D_01D_ROT.INX.gz
<hr/> ddd: day of year [001...366]                      yy: 2-digit year                      yyyy: 4-digit		

The ionospheric products since GPS week 2238 (November 26, 2022), are in transition to the [IGS long product filename convention](#). The available products are listed in Table 1 together with their previous short names and new long names.

## 5 IGS 2024 Bern Workshop Recommendations and their implementation

- a Preparation of final version of IGS RT-GIMs.
- b Preparation of final version of IGS ROTI maps extension towards low latitudes and Southern Hemisphere.
- c Creation of two new Study Groups: “Ionospheric Mapping Function” and “New Methodology for Combining IGS Ionospheric products”.
- d Close cooperation with the Real-Time Committee in order to elaborate full real-time VTEC and ROTI products.
- e Continuation of cooperation with IRI, LOFAR-ERIC and ICG communities.

### 5.1 New Methodology for Combining IGS Ionospheric products

Activities of Study Group „New Methodology for Combining IGS Ionospheric products” resulted in proposition of a new methodology for developing a combined IGS ionospheric product (final and rapid variants), based on systematic validation using DORIS observations. The solution is currently in the implementation phase, with extensive comparative testing underway, including both the quality of results and operational stability. Ultimately, once the community accepts it, the methodology is intended to replace the currently used production pipelines. The proposed approach is distinguished by high computational efficiency, a modular architecture, and ease of expansion with additional components (e.g. ionospheric products of new IAACs). We see significant potential in it

as a foundation for further development of production processes and the expansion of our group's expertise in the development and maintenance of IGS products. The proposal of a new methodology will be presented during IGS Workshop 2026 in Santiago, Chile.

## 5.2 Cooperation with IRI

Over the past year, the collaboration between the IGS Ionosphere Committee and the International Reference Ionosphere continued the regular delivery of ionospheric products supporting assimilation models. A key element was the stable, periodic release of dedicated climate VTEC maps, as well as development work aimed at improving the quality, consistency, and reliability of the entire production chain. Efforts focused on improving quality control, automating verification, and strengthening the pipeline's resilience to data gaps and operational disruptions. Solutions were also developed to facilitate product adaptation to model requirements and their subsequent integration into operational environments. This resulted in a more predictable delivery process and improved readiness for further service scaling and product expansion in subsequent stages of the collaboration.



# Multi-GNSS Pilot Project

## Technical Report 2025

P. Steigenberger<sup>1</sup>, K. Akiyama<sup>2</sup>, O. Montenbruck<sup>1</sup>

<sup>1</sup> Deutsches Zentrum für Luft- und Raumfahrt (DLR)  
German Space Operations Center (GSOC)  
Münchener Straße 20, 82234 Weßling, Germany  
E-mail: peter.steigenberger@dlr.de

<sup>2</sup> Japan Aerospace Exploration Agency (JAXA)  
Tsukuba Space Center  
2-1-1 Sengen, Tsukuba-shi, Ibaraki, 305-8505 Japan

## 1 Introduction

The IGS Multi-GNSS pilot project (MGPP) aims at the inclusion of all GNSS in all IGS products. An important step towards this goal was the completion of the BDS-3/QZSS satellite antenna calibration campaign which paves the way for the inclusion of BeiDou-3 and QZSS into the operational IGS products.

## 2 GNSS Evolution

Table 1 lists the GNSS satellite launches of the year 2025. NVS-02 is the second satellite of the second generation of the Indian regional navigation satellite system NavIC. It suffered from a launch failure and stranded in transfer orbit to its designated geostationary target destination. Nevertheless, it is transmitting navigation signals with PRN I11 ([Steigenberger et al., 2025](#)). Numerous IGS stations track the L5 signal of NVS-02, whereas the L1 and in particular S-band tracking is limited.

QZS-6 is the first QZSS Block III-G satellite. It transmits by default the L1C/B signal and is not able to transmit in the L2 frequency band, contrary to previous QZSS satellites. In the context of QZSS signal modernization, QZS-1R switched from L1C/A to L1C/B transmission in August 2025. Tracking of the L1C/B signal is supported only by a couple of Javad and Septentrio receivers with up-to-date firmware and proper configuration. Most

receivers do not track L1C/B and some with outdated firmware or RINEX conversion software still report L1C/A observations for QZS-6. The launch of QZS-5 in December 2025 failed due to a malfunction of the 2nd stage of the H3 rocket.


The second GLONASS K2 satellite was launched in March 2025 and declared operational on day of year 358/2025. Tracking of the legacy frequency division multiple access (FDMA) signals is supported by most of the IGS stations. Although K2 satellites are able to transmit L1 and L2 code division multiple access (CDMA) signals, these are currently not tracked by the IGS stations. Despite its problems discussed in [Steigenberger and Montenbruck \(2024\)](#), the first GLONASS K1+ satellite R807 became part of the operational constellation on 136/2025. On 14 October 2025, R719 started the first transmission with slot number 28 (corresponding to PRN R28) in the history of GLONASS. However, this unhealthy satellite is currently only tracked by Javad receivers.

The Navigation Technology Satellite-3 (NTS-3) was launched in August 2025 into GEO ([Davis, 2023](#)). NTS-3 is expected to transmit PRN G34 but no such signals have been tracked by IGS receivers so far. The decommissioning of the Galileo FOC satellite E205 in December 2025 ([European Commission, 2025](#)) was followed by the first Galileo dual launch with Ariane 6 in the same month.

**Table 1:** GNSS satellite launches in 2025.

Date	Satellite	Type
29-Jan-2025	NVS-02	GTO
02-Feb-2025	QZS-6	GEO
02-Mar-2025	GLONASS K2	MEO
23-May-2025	GPS III	MEO
13-Aug-2025	NTS-3	GEO
13-Sep-2025	GLONASS K1B	MEO
17-Dec-2025	Galileo FOC E233/E234	MEO
23-Dec-2025	QZS-5	launch failure

For the Galileo Open Service Navigation Message Authentication (OSNMA), the European Union published the Service Definition Document ([European Union, 2025c](#)). The EU furthermore made available Issue 2.2 of the Galileo Open Service Signal-In-Space Interface Control Document ([European Union, 2025a](#)) including the definition of the new E5a Quasi Pilot signal. This signal is implemented on E216, E221, E223, and E226 since December 2025 ([NAGU2025060, 2025](#)). For the Galileo High Accuracy Service (HAS), a reference user algorithm was published ([European Union, 2025b](#)). Cabinet Office, Government of Japan, updated the QZSS Performance Standard ([PS-QZSS, 2025](#)) and the Centimeter Level Augmentation Service (CLAS) interface specification ([IS-QZSS-L6-007, 2025](#))

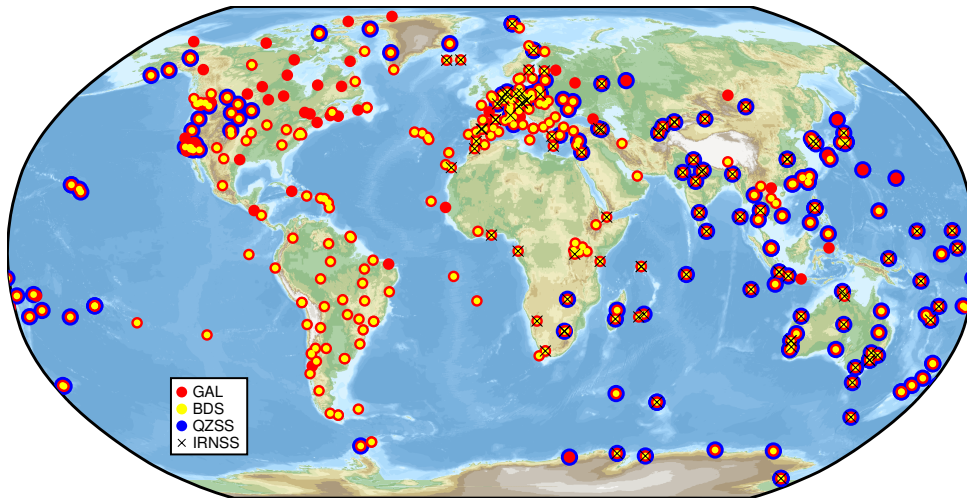

**Figure 1:** Distribution of IGS multi-GNSS stations supporting tracking of Galileo (red), BeiDou (yellow), QZSS (blue), and IRNSS (black crosses) as of January 2026.

### 3 Network


As of January 2026, the IGS multi-GNSS tracking network comprises 401 active stations, see Figs. 1 and 2. Compared to 2024, this is an increase of 16 stations. Six additional stations are completely dormant and did not provide any observations in 2025. Another 31 stations are only providing RINEX 2 files and are therefore only of limited value for multi-GNSS processing.

### 4 Products

Table 2 lists the analysis centers (ACs) contributing orbit and clock products to the IGS Multi-GNSS Pilot Project. The Huazhong University of Science and Technology (**HUS**) joined as MGEX AC on 1 March 2025 providing ultra-rapid, rapid, and final products.

As already mentioned in Sec. 2, QZS-6 and all future QZSS satellites do not transmit signals in the L2 frequency band and transmit L1C/B instead of L1C/A. Therefore, the MGPP analysis centers decided to switch from the ionosphere-free linear combination of L1C/A and L2C to L1C and L5 starting with the products of GPS week 2352 (2 February 2025) as announced in [Steigenberger \(2025\)](#).

Several ACs and individual members of the **MGPP** contributed to the IGS BDS-3/QZSS satellite antenna calibration campaign. More details are given in the next section and the report of the Reference Frame Product Committee. Multi-GNSS differential code bias (DCB) products are generated by **CAS** and **GFZ** (daily rapid products) as well as **DLR**

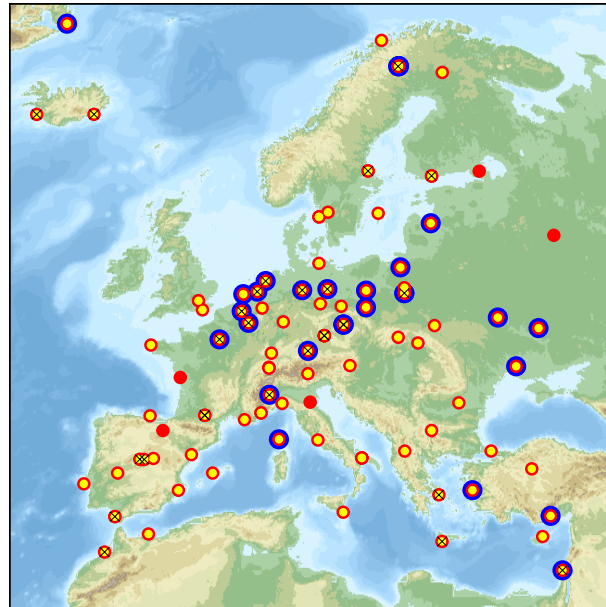

**Figure 2:** Distribution of European IGS multi-GNSS stations as of January 2026. See Fig. 1 for explanation of individual station labels.

**Table 2:** Analysis centers contributing to the IGS MGPP as of December 2025.

Institution	Abbr.	GNSS
CNES/CLS	GRGOMGXFIN	GPS+GLO+GAL+BDS2+BDS3
CODE	CODOMGXFIN	GPS+GLO+GAL+BDS2+BDS3+QZS
GFZ	GFZOMGXRAP	GPS+GLO+GAL+BDS2+BDS3+QZS
HUS	HUSOMGXFIN	GPS+GLO+GAL+BDS2+BDS3
IAC	IACOMGXFIN	GPS+GLO+GAL+BDS2+BDS3+QZS
JAXA	JAXOMGXRAP	GPS+GLO+GAL+BDS2+BDS3+QZS
SHAO	SHAOMGXRAP	GPS+GLO+GAL+BDS2+BDS3
WU	WUMOMGXFIN	GPS+GLO+GAL+BDS2+BDS3+QZS

(quarterly final product). Details on the CAS products are given in the recent publication of Wang et al. (2025).

## 5 Satellite Antenna Calibration Campaign

The operational IGS products currently cover GPS, GLONASS and Galileo. BeiDou and QZSS are only included in the MGPP products discussed in the previous section. The

inclusion of these constellations in the operational products is so far hampered by scale inconsistencies of the BDS and QZSS antenna models with the IGS20 reference frame scale.

In order to overcome these inconsistencies, the IGS Reference Frame Committee, the Antenna Committee, and the Multi-GNSS Pilot Project together with ten IGS/MGEX ACs have generated a new BDS-3/QZSS antenna model aligned to the IGS20 scale. The BeiDou-3 part includes block-specific estimated B1C/B2a phase patterns for BDS-3 CAST, SECM-A, and SECM-B MEO satellites as well as the BDS-3 IGSO satellites. The x-/y-PCOs and B1 z-PCOs are manufacturer calibrations provided by the Test and Assessment Research Center of the China Satellite Navigation Office (CSNO/TARC). Estimated satellite-specific B1C/B2a and B1I/B3I z-PCOs are used to derive a set of B1, B2, and B3 PCOs aligned to IGS20. Multiple intervals are considered for selected SECM satellites with time-varying PCOs. In this case, no PCOs are provided prior to January 1, 2021. PPP-AR validation of the new BDS-3 antenna model demonstrated a significantly improved scale consistency w.r.t. IGS20 of 0.1 - 0.2 ppb.

The QZSS model is limited to the L1 and L5 frequencies as the QZSS Block III satellites do not transmit L2 anymore. The satellite-specific phase patterns (except for J001) and the satellite-specific x-/y-PCOs provided by Cabinet Office are retained. The z-PCOs of J003, J005, and J007 provided by Cabinet Office are also retained whereas estimated L1/L5 z-PCOs are used for J001, J002, and J004.

## 6 Satellite Metadata

Cabinet Office, Government of Japan, published the satellite information for QZS-6 including the dimensions, optical properties, antenna phase center offsets and phase patterns for the main navigation antenna, SLR retro-reflector offsets, mass, center of mass position, and transmit power. Information on the satellite antenna phase center offsets of the most recent GPS III satellites G080 and G081 launched in 2024 and 2025, respectively, are still missing.

Starting with GPS week 2350, an additional SATELLITE/PLANE block has been added to the IGS satellite metadata file (Steigenberger, 2025), which is a new feature of version 1.10 of the metadata file format (Steigenberger and Montenbruck, 2024). In addition to the orbital plane, the slot within the plane is given. This information has been requested by the IGS Combination Task Force (see next section) to allow for a plane-specific grouping/weighting in the combination. The latest version of the IGS satellite metadata file is available at the IGS file server<sup>1</sup> as well as the IGS github repository<sup>2</sup>.

<sup>1</sup>[https://files.igs.org/pub/station/general/igs\\_satellite\\_metadata.snx](https://files.igs.org/pub/station/general/igs_satellite_metadata.snx)

<sup>2</sup>[https://github.com/International-GNSS-Service/IGS\\_Operational\\_Files/blob/main/operations/igs\\_satellite\\_metadata.snx](https://github.com/International-GNSS-Service/IGS_Operational_Files/blob/main/operations/igs_satellite_metadata.snx)

## 7 Combination Task Force

The IGS Combination Task Force (CTF) was established in 2022 as an initiative of the MGPP to support the build-up of a consolidated tool chain for multi-GNSS orbit and clock combination as well as the progressive build-up of a combined product portfolio within the IGS. In 2025, two new members from the Chinese Academy of Sciences and from [NRCAN](#) joined the task force team and increased its capacity. The work of the task force focused on the validation and performance assessment of different orbit and combination techniques and software tools. In parallel to the task force, both [GFZ](#) and [GA](#) finalized their software packages for multi-GNSS orbit combination (SPOCC and ROCS) and made them publicly available to the GNSS community (<https://gnss.gfz.de/services/spocc>, <https://github.com/GeoscienceAustralia/ROCS>).

Extensive comparisons by the task force showed that both packages provide multi-GNSS orbit combinations of consistent quality despite the different approaches (variance component estimation vs. L1-norm weighting). Building on these results, initial multi-GNSS clock combinations were generated with the SPOCC clock combination module and the [NRCAN](#) SPARKCombo software. Precise point positioning (PPP) solutions showed an excellent performance of the SPOCC combined orbits paired by NRCAN's clock combinations. In particular the resulting multi-GNSS products were shown to be fully competitive with IGS GPS-only combinations and single-AC GPS+GLO+GAL products. Furthermore, a “no-harm” criterion was met for the combination including non-GPS constellations.

Initial problems with the SPOCC clock combination have been overcome by a revised reference clock handling and successfully verified in a PPP test. Thus, two independent orbit and clock combination packages have been validated and are available for the future generation of operational combined multi-GNSS products by the next analysis center coordinator. Given the current achievements, the CTF has essentially met its key goals and decided to terminate its work in early 2026.

### Acronyms

<b>CAS</b>	Chinese Academy of Sciences
<b>CLS</b>	Collecte Localisation Satellites
<b>CTF</b>	Combination Task Force
<b>CNES</b>	Centre National d'Etudes Spatiales
<b>CODE</b>	Center for Orbit Determination in Europe
<b>DLR</b>	Deutsches Zentrum für Luft- und Raumfahrt
<b>GA</b>	Geoscience Australia
<b>GFZ</b>	Deutsches GeoForschungsZentrum
<b>HUS</b>	<a href="#">Huazhong University of Science and Technology</a>

**IAC** Information and Analysis Center for Positioning, Navigation and Timing  
**JAXA** Japan Aerospace Exploration Agency  
**MGPP** Multi-GNSS Pilot Project  
**NRCan** Natural Resources Canada  
**SHAO** Shanghai Observatory  
**WU** Wuhan University

## References

- Davis B. (2023). Making GPS More Resilient: NTS-3 Satellite Prepares for Launch to Experiment with Ways to Improve GPS, *InsideGNSS+* 18(6) 18-23
- European Commission (2025). Service Notice #22 – Galileo GSAT0205 decommissioning and GSAT0232 relocation, <https://www.gsc-europa.eu/sites/default/files/sites/all/files/Galileo-service-notice-22-v1.0.pdf>
- European Union (2025). Galileo Open Service Signal-In-Space Interface Control Document (OS SIS ICD), OS SIS ICD, Issue 2.2, [https://www.gsc-europa.eu/sites/default/files/sites/all/files/Galileo\\_OS\\_SIS\\_ICD\\_v2.2.pdf](https://www.gsc-europa.eu/sites/default/files/sites/all/files/Galileo_OS_SIS_ICD_v2.2.pdf) doi: 10.2878/742017
- European Union (2025). EUSPA, Galileo High Accuracy Service Reference User Algorithm, Issue 1.0, November 2025, HAS-UA, Issue 1.0, [https://www.gsc-europa.eu/sites/default/files/sites/all/files/Galileo\\_HAS\\_Reference\\_User\\_Algorithm\\_TN.pdf](https://www.gsc-europa.eu/sites/default/files/sites/all/files/Galileo_HAS_Reference_User_Algorithm_TN.pdf)
- European Union (2025). Galileo Open Service Navigation Message Authentication (OS-NMA) Service Definition Document (SDD) Issue 1.0, July 2025, OSNMA-SDD, Issue 1.0, [https://www.gsc-europa.eu/sites/default/files/Galileo-OSNMA-SDD\\_v1.0.pdf](https://www.gsc-europa.eu/sites/default/files/Galileo-OSNMA-SDD_v1.0.pdf) doi: 10.2878/485549
- IS-QZSS-L6-007 (2025). Quasi-Zenith Satellite System Interface Specification Centimeter Level Augmentation Service, Technical report, <http://qzss.go.jp/en/technical/download/pdf/ps-is-qzss/is-qzss-l6-007.pdf>
- NAGU2025060 (2025). Galileo Satellites Maintenance Completion, <https://www.gsc-europa.eu/notice-advisory-to-galileo-users-nagu-2025060>
- IS-QZSS-L6-007 (2025). Quasi-Zenith Satellite System Performance Standard, Technical report, <https://qzss.go.jp/en/technical/download/pdf/ps-is-qzss/ps-qzss-005.pdf>
- Steigenberger, P. and O. Montenbruck (2024). IGS Satellite Metadata File Description, Version 1.00, September 30, 2024. Technical report. [https://files.igs.org/pub/resource/working\\_groups/multi\\_gnss/Metadata\\_SINEX\\_1.10.pdf](https://files.igs.org/pub/resource/working_groups/multi_gnss/Metadata_SINEX_1.10.pdf), doi: 10.57677/metadata-sinex
- Steigenberger, P. and O. Montenbruck (2024). Characterization of the GLONASS-K1+ atomic frequency standard, *GPS Solutions* 28(4), doi: 10.1007/s10291-024-01736-1
- Steigenberger P. (2025). Upcoming change in QZSS signal selection, *IGSMail* #8558

- Steigenberger P. (2025). Inclusion of SATELLITE/PLANE block in IGS satellite metadata file, [IGSMail #8556](#)
- Steigenberger, P., S. Thielert, and S. Hackel (2025). NVS-02: Navigation Signals from Transfer Orbit, *GPS World* 36(5) 28-29
- Wang, N., Y. Li, Z. Li, A. Liu, and B. Liu (2025). Determination of multi-GNSS differential code biases with satellite antenna phase center corrections, *GPS Solutions* 30(1), doi: 10.1007/s10291-025-01983-w

# IGS Real-Time Committee Technical Report 2025

Axel Rülke<sup>1</sup>, Ningbo Wang<sup>2</sup>, Andrea Stürze<sup>1</sup>

- <sup>1</sup> Federal Agency for Cartography and Geodesy, Germany  
[axel.ruelke@bkg.bund.de](mailto:axel.ruelke@bkg.bund.de)
- <sup>2</sup> Aerospace Information Research Institute,  
Chinese Academy of Sciences, China

## 1 Introduction

The IGS Real-Time Committee organizes the operation of the IGS Real-Time Service (IGS RTS) and coordinates the handling of real-time GNSS data and products through its data centers. The IGS RTS is providing access to IGS real-time products, such as satellite orbits, satellite clocks, biases and models of the ionosphere. These products are computed by a number of Real-Time Analysis Centers (RT-ACs). The Real-Time Analysis Coordinator (RT-ACC) performs quality control checks tests to these individual products and computes a combined IGS Real-Time product.

The data centers provide access to the real-time observation data streams of the global IGS network and to the IGS RTS products, the products by the individual RT-ACs and the combined IGS products.

## 2 Committee Activities in 2025

In 2025, the IGS Real-Time Committee (RTC) organized two virtual committee meetings, held in June and November, respectively, to coordinate committee activities and ongoing developments.

The IGS-SSR Task Force was established with the RTC to support the development of new IGS-SSR messages, further enhance the IGS-SSR format, and strengthen coordination with the RTCM community.

Questionnaires were distributed within Real-Time Analysis Centers to collect detailed information on the input data, applied correction models, and parameter modeling strategies used in real-time processing. The collected information has been made available on the RTC website to improve the description clarity of the IGS Real-Time Service (RTS) products.

Several IGS RTACs currently provide real-time correction products to enable applications relay on the IGS RTS to achieve 10 cm positioning accuracy with fixed ambiguities. The Real-Time Analysis Coordinator (RT-ACC) implemented two new features to further support multi-frequency precise point positioning (PPP) and ambiguity resolution (PPP-AR) monitoring.

### **3 Collaborating IGS Committees**

The IGS Real Time Committee collaborates with a number of other IGS Committees. In detail this includes the Infrastructure Committee on the station network, data centers and casters as well as observation and product data streams, the ionosphere committee on the development and combination of real-time ionosphere products, and the Bias and Ambiguity Resolution (BAR) committee on real-time biases and positioning with ambiguity resolution. The IGS Real-Time committee benefits significantly from this cooperation and it is highly appreciated.

## **4 Standards and Formats**

### **4.1 RTCM-SSR**

An open standard for providing complete sets of State Space Representation (SSR) messages suitable for PPP-RTK with centimeter accuracy is under development in RTCM. Within SC104 a task force was created to push the development. While only very little progress has been made in 2024, the task force has resumed in early 2025. Meanwhile, the interoperability tests are ongoing based on the RTCM SSR draft document, which has been updated to v0.9.5 Amendment 3. Geo++ and Leica provided SSR data sets for encoding and decoding and about 7 test participants successfully decoded these data sets. Leica and Geo++ provided real-time streams from the SAPOS test network as well. First positioning results are produced and presented by NovAtel. The next steps are to complete interoperability testing and to prepare the SSR document for CDV, which will be initiated hopefully within 2026.

The SC134 SSR Integrity messages are related to the already published SC104 SSR standard, i.e., message types 1057-1061 and MT 1063-1068 for GPS and GLONASS, respectively. The SC134 SSR Integrity messages for the new SC104 SSR standard will be devel-

oped after the new SSR standard is formally published.

## 4.2 IGS-SSR


The IGS-SSR format has been released in October 2020 and is widely used by the GNSS community. The propriety messages are assigned to Message Type 4076 of the RTCM standard 10403.4. Due to the slow progress in the RTCM-SSR format development, it was agreed within the IGS Real-Time Committee to keep and enhance the IGS-SSR format. These extensions include the introduction of satellite APC and attitude information, the global ionospheric accuracy information, and regional atmospheric corrections together with corresponding quality indicators, as discussed during the 2024 Bern Workshop.

In early 2025, the IGS-SSR Task Force was established, with colleagues from BKG, CAS, DLR, Geo++ and UPC, to further enhance the IGS-SSR format and collaborate with the RTCM community. The IGS BAR committee also expressed its support for the development of satellite attitude and integrity monitoring messages. As of December 2025, new proposal drafts have been developed for satellite attitude, satellite offsets, satellite PCV/GDV messages, GNSS satellite attitude messages, as well as ionospheric RT-RMS messages associated with the RT-VTEC product. Proposals related to metadata, ionosphere and troposphere messages require further discussion to ensure consistency with the largely finalized RTCM-SSR standard.

Among these developments, newly proposed ionospheric real-time RMS (RT-RMS) corrections have been routinely transmitted in CAS product streams (IGS-RTWG-375). Similar to the RT-VTEC representation, the proposed RT-RMS information is described using spherical harmonics, with degree and order up to 15 and up to four ionospheric layers. Global ionospheric VTEC corrections are disseminated via IGS-SSR Message Type 201, while the corresponding RT-RMS information is transmitted using Message Type 202. Together, Message Types 201 and 202 enable the dissemination of global RT-VTEC corrections along with their associated accuracy information. The proposed IGS-SSR ionospheric RT-RMS message has been added into CAS generated real-time correction streams, which can be accessed via the IGS BKG caster ([products.igs-ip.net:2101](https://products.igs-ip.net:2101)). The available streams include: (1) IONO01CAS1: global ionospheric RT-VTEC and RT-RMS information; and (2) SSRC01CAS1: G+E+C orbit, clock, code and phase bias, together with global RT-VTEC and RT-RMS information.

## 5 IGS RT Data Centers

The BKG GNSS Data Center (GDC, <https://igs.bkg.bund.de/>) provides access to the real time observation data streams of the global IGS network and products of the IGS RTS (Söhne et al., 2024).

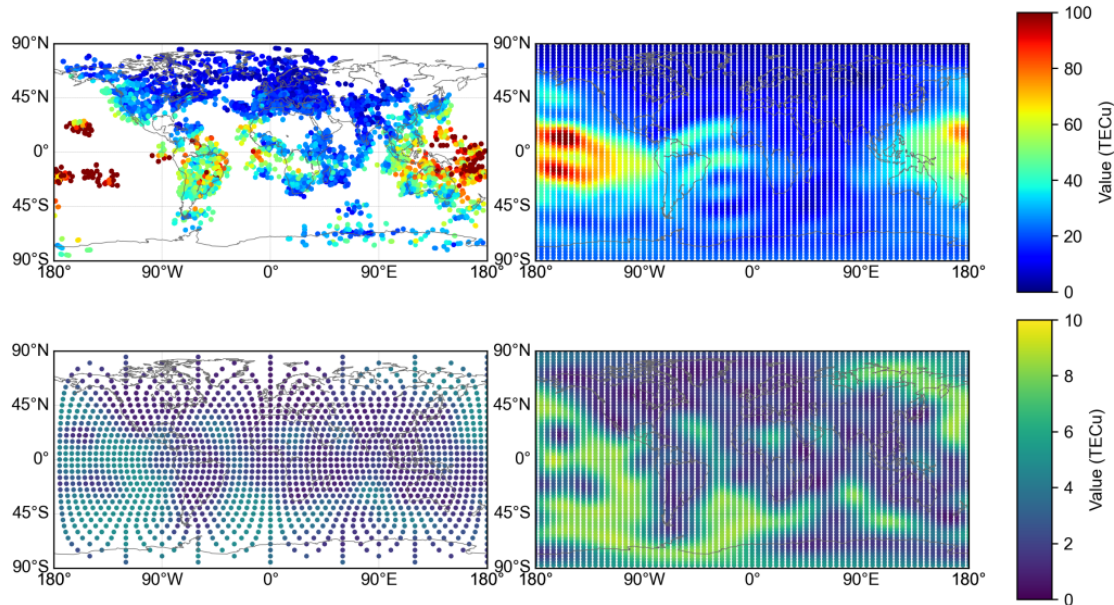


**Figure 1:** Example of global RT-VTEC and associated RT-RMS maps. The upper-left panel shows the real-time VTEC observables, while the upper-right panel presents the SH-fitted RT-VTEC map on a regular geographic grid. The lower-left panel displays the accuracy information computed at each grid with fixed angular spacing, and the lower-right panel depicts the SH-fitted real-time accuracy information map on the same regular geographic grid.

NASA's Earthdata portal provides real time data observation data streams and products at <https://www.earthdata.nasa.gov/>.

While BKG and CDDIS act as the primary data centers for real time data, there are relay data centers supplying users in specific regions of the Earth: The Global Navigation Satellite System Data Center at Geoscience Australia (GA, <https://gnss.ga.gov.au/>) supplies user in Australia and the Pacific, the Data Center at the GNSS Research Center in Wuhan (<http://ntrip.gnsslab.cn:2101>) and the Chinese Academy of Sciences (CAS, <https://igs.bdsmart.cn/>) supply the user community in China. The CAS data center has continuously enhanced its services to improve the availability of the delivered IGS data and product streams. An updated version of the IGGNtrip Software has been developed and deployed, to support the operational data distribution services at CAS. With the release of IGGNtrip V1.1, each approved user account can access simultaneously up to 1,000 mountpoints from a maximum of 10 devices (IGS-RTWG-374).

Other regional real time data centers hold real time observation data for specific regions, such as the Royal Observatory of Belgium (<https://www.euref-ip.be/>), the Geodetic Data Archiving Facility of the Italian Space Agency ([http://geodaf.mt.asi.it/gps\\_caster\\_access.php](http://geodaf.mt.asi.it/gps_caster_access.php)) and BKG's GDC for EUREF.

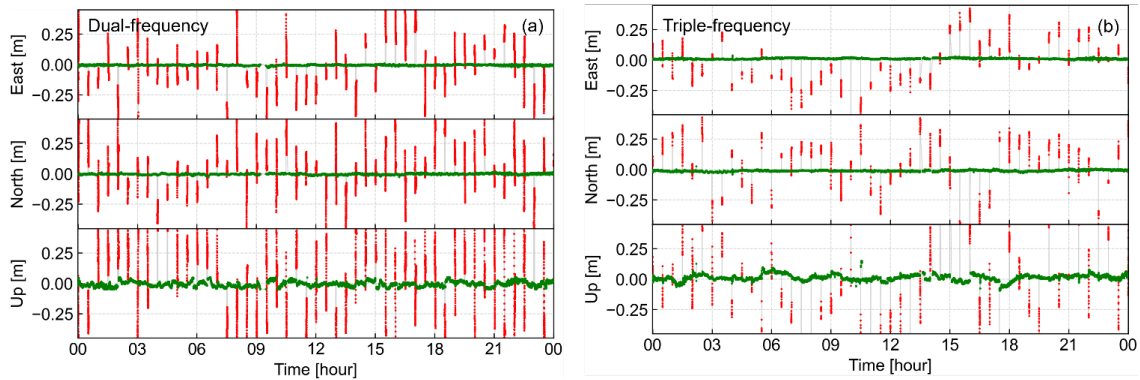

**Figure 2:** Dual- and triple-frequency real-time PPP-AR positioning errors obtained from the SSRC01CAS1 streams at one IGS test site, using a 30-minute re-convergence interval.

## 6 IGS RTS Analysis Centers and Products

In total, twelve IGS Real-Time Analysis Centers provide individual products to the IGS RTS (Table 1).

The RTS products include satellite orbits and clocks for up to four GNSS, code and phase biases and ionosphere information. The satellite orbits are referenced to Satellite Antenna Phase Center (APC) and Center of Satellite Mass (CoM), respectively. Table 2 shows the content of SSR streams from individual RT-ACs. Some of them now provide code and, in particular, phase biases.

The IGS Real Time Service product descriptions on the IGS website is enhanced by detailed information on the used data, correction models and parameter modeling of each individual AC's product. The full list of IGS Real-Time analysis centers and their products is given at <https://igs.org/rts/products/>. As summarized in Table 2, five IGS RT ACs currently support PPP-AR services by providing additional real-time phase bias corrections. Figure 2 illustrates the one-day time series of the dual- and triple-frequency real-time PPP-AR solutions based on the SSRC01CAS1 stream from CAS, which shows the east, north and up components over 48 re-convergence arcs. The dual-frequency solutions consistently converge within approximately 2.0 minutes, whereas the triple-frequency solutions exhibit notably faster recovery, typically within 1.0 minute. After the convergence, both dual- and triple-frequency solutions provide comparable positioning accuracy, with horizontal and vertical errors generally remaining below 2.0 and 3.5 cm, respectively.


## 7 Real-Time Analysis Coordinator (RT-ACC)

The Real Time Analysis Coordinator (RT-ACC) monitors the product data streams of the RT-ACs and combines the individual products to the final IGS RT products. The RT-ACC at BKG uses BKG's open source software BKG Ntrip Client (BNC). BNC is an open source multi-stream tool box for a variety of real-time GNSS applications. It can be used to decode, convert and monitor RTCM 2.x and RTCM 3.x data streams and supports real-time PPP, high rate RINEX data centers, real-time GNSS engines and real-time combination. The latest BNC version can be downloaded for a variety of operating systems at <https://igs.bkg.bund.de/ntrip/bnc>.


In 2025 two new features have been implemented: Multi-Frequency PPP capability, and Ambiguity Resolution (PPP with AR). The algorithm for the ambiguity resolution is the Best Integer Equivariant algorithm (BIE, (Teunissen , 2005)). The BIE generally reveals float ambiguities, not integers. However, the distance between the (float) BIE result and the nearest integer (the fractional part of the BIE result) is a very good criterion for the reliability of the resolved ambiguity. In addition, it is possible to compute a variance (or its square root – sigma) of each resulting BIE ambiguity. Using the options “Max Frac” and “Max Sig” the user may decide whether to use this additional information and fix (constrain) only those ambiguities which meet these requirements. Furthermore, two options (“Biases stream” and “Biases file”) have been introduced because some IGS RTS analysis centers (namely the WHU) disseminate the SSR corrections in two separate streams: one stream/file contains the satellite orbit and clock corrections, the second stream/file contains the satellite biases.

As visible from Table 2, five IGS RT ACs currently are providing real-time phase bias corrections. Nevertheless, not all corrections are suitable for PPP with ambiguity resolution (PPP-AR). In more detail, some ACs have set the signal integer indicator to zero. This indicates that the corresponding signals have no integer property. Furthermore, one of them (NRC) does provide the corrections for a single constellation (GPS) only, which is not sufficient for reasonable fast ambiguity resolution and reliable PPP-AR performance. Figure 3 shows example PPP-AR results using the IGS RTS AC products from the CNES and WHU.

For the positioning results in Figure 3 the observations of station FFMJ (Frankfurt, Germany) in a fully kinematic mode using all 3 constellations (GPS, Galileo and Beidou) are processed. Because the phase biases for Beidou within the SSR stream `SSRA00CNE1` currently are not suitable for PPP-AR, the ambiguities are solved here for GPS and Galileo only. The analysis center WHU provides phase biases for all 3 constellations within its extra stream `OSBC00WHU1`. Because they are all suitable for PPP AR, the ambiguities are here resolved for all 3 constellations. Some issues within the SSR corrections limit the accuracy of the positioning results. Regarding `SSRA00CNE1`, the tracking mode for G5 phase bias is reported as “T”. However, there is no corresponding code bias with this tracking mode. The phase biases contain the information about the satellite yaw angles. For some

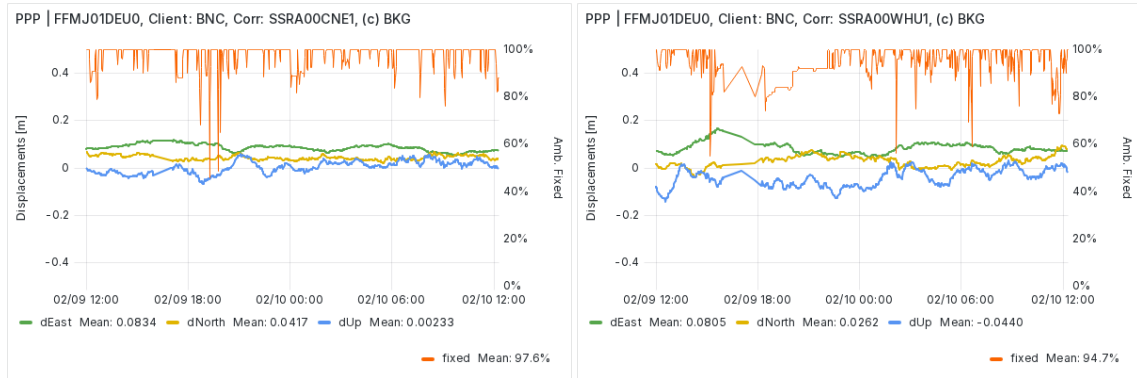


**Figure 3:** Real Time Positioning estimates of PPP-AR solutions using IGS RTS products SSRA00CNE1 (left) and SSRA00WHU1 together with OSBC00WHU1 (right). The PPP client Software BNC is used to estimate for positions of station FFMJ00DEU (Frankfurt, Germany) at February 9<sup>th</sup> and 10<sup>th</sup> 2026

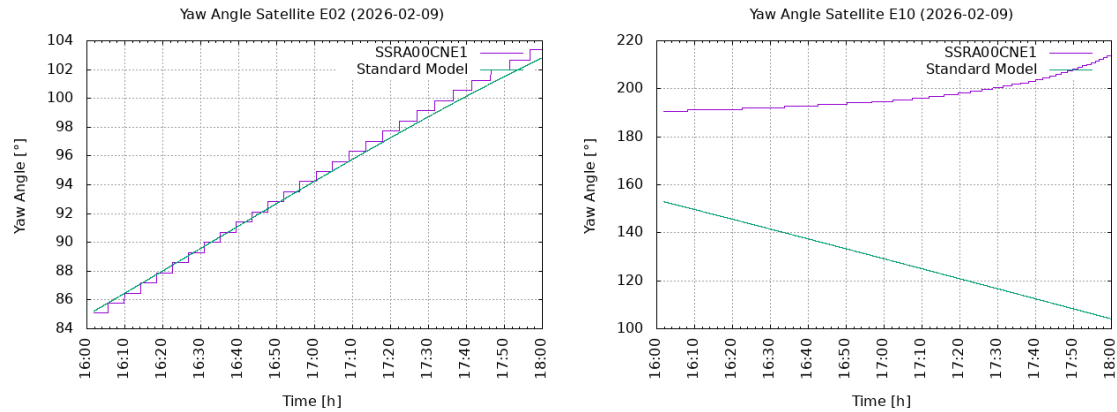

**Figure 4:** Satellite Yaw Angle as reported from SSR stream SSRA00CNE1 at February 9th 2026 in comparison to computed values using the standard satellite attitude model. While the yaw angles agree with the standard model for satellite E02, the yaw angle values differ completely for satellite E10.

satellites (even non-eclipsing) these yaw angles do not agree with a standard satellite attitude model (see Figure 4). Hence, the standard satellite attitude model is used for the processing.

The clock corrections in Figure 5 (left) look reasonable for GPS satellites. However, some clock corrections for Galileo satellites show jumps. If all clock corrections for a given constellation jumped by the same value, it would not be any problem – such jump common for all satellites can be fully compensated by the estimated receiver clock correction. However, Figure 6 (right) shows, that the jumps are almost non-existent for some satellites while they are at the several cm level for other satellites. Such clock corrections degrade

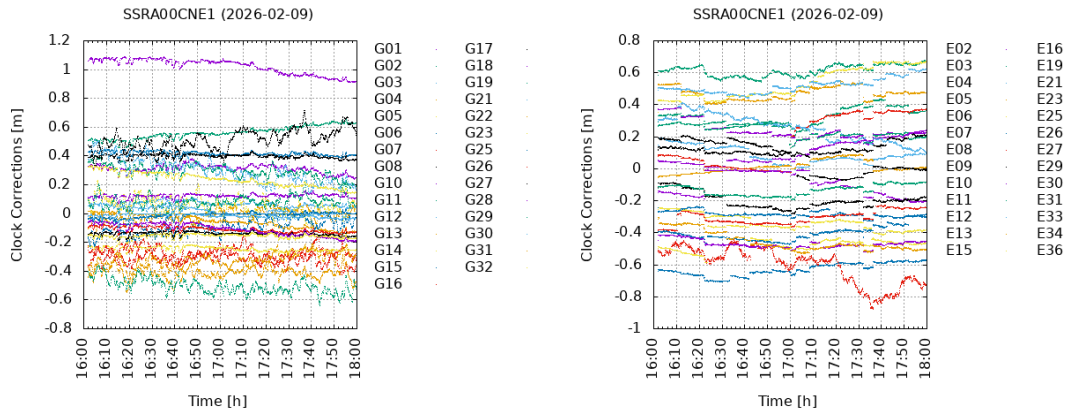

**Figure 5:** Satellite Clock Corrections for GPS (left) and Galileo (right) as reported from SSR stream SSRA00CNE1 at February 9<sup>th</sup> 2026.

the performance of the PPP (and even to larger extend PPP-AR) algorithm.

WHU biases as reported in OSBC00WHU unfortunately, are sent in 5 minutes rate only. Furthermore, the yaw angles are not given. They are all set to constant value of 180 degrees. Therefore, the standard satellite attitude model is used for the processing as well.

## 8 IGS RTS Products

### 8.1 IGS RTS broadcast ephemeris data streams

The IGS RTS also provides real-time access to broadcast ephemeris. The global IGS RT receiver network is used to create complete sets of broadcast ephemeris information for GPS, GLONASS, Galileo (F/NAV and I/NAV), BDS, QZSS and SBAS satellites, which are available on the Ntrip Broadcaster <https://products.igs-ip.net/>.

BKG generates several streams carrying only Broadcast Ephemeris with its software package BNC. Therefore, the incoming ephemeris are checked for errors and inconsistencies and then merged, encoded in RTCM Version 3 format and uploaded to NTRIP broadcasters with a high repetition rate. The satellite system(s) that shall be part of the uploaded stream can be specified. The resultant multi-GNSS data stream is available on mountpoint BCEP00BKG0. A number of additional mountpoints BCEP0[1-7]BKG0 have been set up to provide broadcast ephemerides for each individual GNSS in a separate stream. Furthermore, mountpoint BCEP08BKG0 provides broadcast ephemeris including GPS, GLONASS, Galileo, BDS QZSS, and SBAS broadcast ephemeris, which BKG generates from raw ephemeris frames using the Alberding EuroNet software

CHC provides as well a broadcast ephemeris stream, which is available at mountpoint

BCEP00CHC0 including GPS, GLONASS, Galileo (I/NAV) and BDS broadcast ephemeris.

Chinese Academy of Sciences (CAS) is providing broadcast ephemeris streams derived from the global IGS network and created by its software BDSMART. There is one data stream available at mountpoint BCEP00CAS0 including GPS, GLONASS, Galileo, BDS and QZSS broadcast ephemeris.

GMV is also providing a compiled broadcast ephemeris stream for GPS, GLONASS, Galileo and BDS. The data stream is created by GMV's software magicGNSS and available through mountpoint BCEP00GMV0.

JPL provides combined broadcast ephemeris data streams for GPS, GLONASS and Galileo ephemeris. The two data streams at mountpoints BCEP01JPL0 and BCEP02JPL0 are created by two GDGPS operations centers.

The complete list of Broadcast Ephemeris products is given at <https://igs.org/rts/products/>.

The IGS RT receiver network is used to create a complete set of broadcast ephemeris information

## 8.2 IGS RTS Combined products

The RT-ACC combines the individual AC contributions for orbit and clock corrections to the IGS combined product. The SSR[A,C]02IGS1 product contains orbit and clock corrections as well as code biases for GPS, GLONASS and Galileo, the SSR[A,C]03IGS1 provides BDS corrections in addition. For each product, one data stream refers to the Satellite Antenna Phase Center (APC), another stream refers to the Center of Mass of the satellites (CoM).

There are also three Ionosphere products provided by the University of Catalunya (UPC) and the Chinese Academy of Sciences (CAS). The ionosphere products contain VTEC spherical harmonic coefficients.

All products are combined in Table 3. There are SSR products using the RTCM-SSR messages (message types 1057 – 1302). The messages type 4076 is a proprietary message type of the IGS and wraps sub-messages for orbit and clock corrections, biases and ionosphere models. A list of IGS sub-message numbers is given at <https://igs.org/rts/formats/>.

## 9 IGS RTS product monitoring

A selection of results of the IGS RTS product monitoring can be found at <https://igs.org/rts/monitoring/>. This includes analyses on the agreement of orbit and clock

**Table 1:** IGS Real-Time Service Analysis Centers

APM	Innovation Academy for Precision Measurement Science and Technology, China
BKG	Bundesamt für Kartographie und Geodäsie, Germany
CAS	Chinese Academy of Sciences, China
CHC	China HuaCe Corporation, China
CNE	French Space Agency, France
GFZ	Helmholtz Centre for Geosciences, Germany
GMV	Grupo de Mecanica de Vuelo, Spain
JPL	Jet Propulsion Laboratories, USA
NRC	Natural Resources Canada, Canada
SHA	Shanghai Observatory, China
UPC	Universitat Politècnica de Catalunya, Barcelona, Spain
WHU	Wuhan University, China

**Table 2:** IGS Real-Time Service combination products.

AC	Orbits and Clocks				Code Biases				Phase Biases				VTEC
	G	E	C	R	G	E	C	R	G	E	C	R	
APM	○	○	○	○									
BKG	○	○		○	○	○		○					
CAS	○	○	○	○					○	○	○		○
CHC	○	○	○	○	○	○	○	○	○	○	○		
CNE	○	○	○		○	○	○		○	○			○
GFZ	○	○		○	○	○		○					
GMV	○	○	○		○	○	○						
JP	○			○									
NRC	○				○				○				
SHA	○	○	○	○	○	○		○					
	○	○	○		○	○							
UPC													○
WHU	○	○	○	○					○	○	○		


**Table 3:** IGS Real-Time Service combination products.

Stream Name	Description	Ref. Point	IGS-SSR Messages and sampling [s]	Software
SSRA02IGS0	Orbit/Clock Correction, Kalman Filter Combination RTCM-SSR: G, R, E	APC	1057(10), 1058(10), 1063(10), 1064(10), 1240(10), 1241(10), 1300(60), 1302(60)	BKG
SSRC02IGS0	Orbit/Clock Correction, Kalman Filter Combination RTCM-SSR: G, R, E	CoM	1057(10), 1058(10), 1063(10), 1064(10), 1240(10), 1241(10), 1300(60), 1302(60)	BKG
SSRA02IGS1	Orbit/Clock Correction, Kalman Filter Combination IGS-SSR: G, R, E	APC	4076_021(10), 4076_022(10), 4076_041(10), 4076_042(10), 4076_061(10), 4076_062(10)	BKG
SSRC02IGS1	Orbit/Clock Correction, Kalman Filter Combination IGS-SSR: G, R, E	CoM	4076_021(10), 4076_022(10), 4076_041(10), 4076_042(10), 4076_061(10), 4076_062(10)	BKG
SSRA03IGS0	Orbit/Clock Correction, Kalman Filter Combination RTCM-SSR: G, R, E, C	APC	1057(10), 1058(10), 1063(10), 1064(10), 1240(10), 1241(10), 1258(10), 1259(10), 1300(60), 1302(60)	BKG
SSRC03IGS0	Orbit/Clock Correction, Kalman Filter Combination RTCM-SSR: G, R, E, C	CoM	1057(10), 1058(10), 1063(10), 1064(10), 1240(10), 1241(10), 1258(10), 1259(10), 1300(60), 1302(60)	BKG
SSRA03IGS1	Orbit/Clock Correction, Kalman Filter Combination IGS-SSR: G, R, E, C	APC	4076_021(10), 4076_022(10), 4076_041(10), 4076_042(10), 4076_061(10), 4076_062(10), 4076_101(10), 4076_102(10)	BKG
SSRC03IGS1	Orbit/Clock Correction, Kalman Filter Combination RTCM-SSR: G, R, E, C	CoM	4076_021(10), 4076_022(10), 4076_041(10), 4076_042(10), 4076_061(10), 4076_062(10), 4076_101(10), 4076_102(10)	BKG
ION000IGS1	Global Ionospheric Model		4076_201(15)	UPC
ION001IGS0	Global Ionospheric Model		1264(30)	CAS
ION001IGS1	Global Ionospheric Model		4076_201(30), 4076_202(30)	CAS


estimates of the individual RT ACs (Figure 6) or time series of RT precise point positioning (PPP) estimates for selected stations (Figure 7).

Figure 8 presents probability density distribution and corresponding cumulative probability distribution of RMS VTEC differences for the UPC and CAS combined RT-GIMs. The median RMS values are approximately 4.5-4.6 TECU for both solutions, while the 95<sup>th</sup>-percentile levels reach about 8.1 TECU for the UPC combined RT-GIM and 7.8 TECU for the CAS solution. The newly generated CAS combined RT-GIM achieves performance fully comparable to the existing UPC combined product


The IGS RTS monitoring also gives information on the performance of RT-GIMs from individual RTACs (see Figure 9). Using NRT DORIS data from Jason-3, the accuracy of different RT-GIM products are routinely monitored with a latency of about 24 hours. The evaluation includes RT-GIMs from CAS (ION000CAS1), CNES (ION000CNE1), UPC-IonSAT (ION000UPC1), WHU (ION000WHU1) as well as the IGS combined solutions (ION000IGS1 generated by UPC-IonSAT and ION001IGS1 generated by CAS).

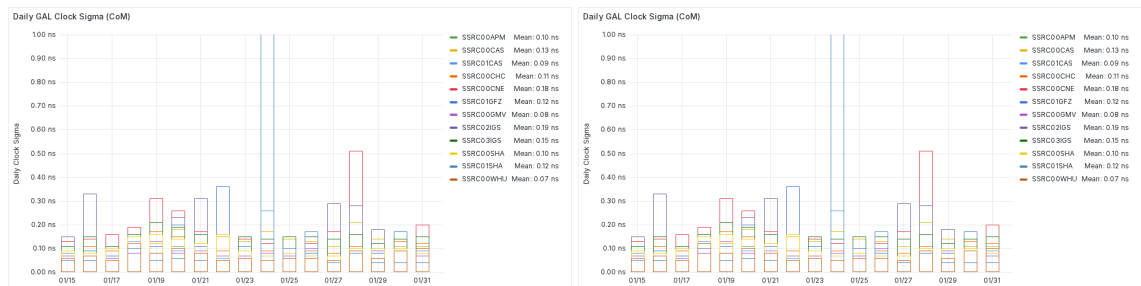


**Figure 6:** Agreement of real time Galileo orbits (left) and clock (right) products provided by different RT ACs.

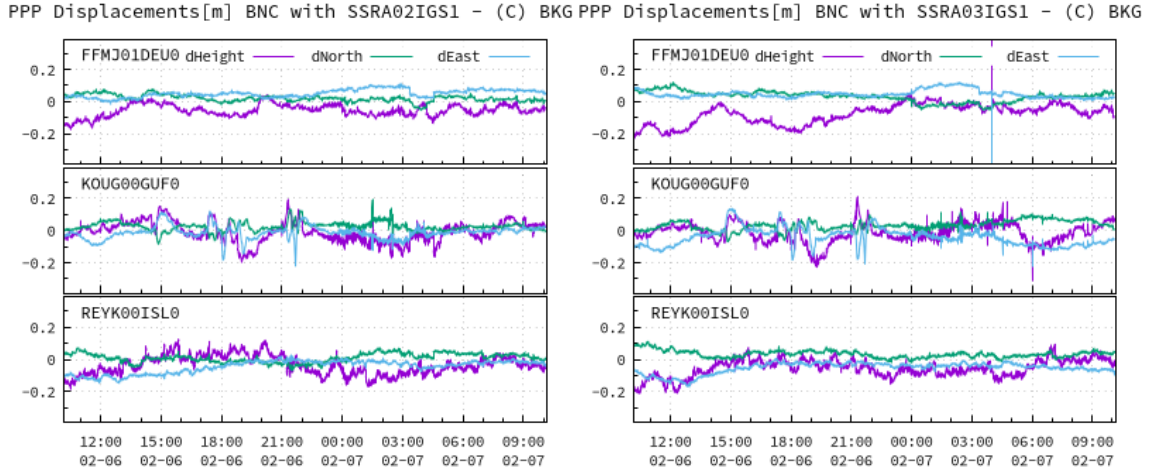

**Figure 7:** Real Time Positioning estimates of PPP solutions using IGS RTS products SSRA02IGS1 (left) and SSRA03IGS1 (right). The PPP client Software BNC is used to estimate for positions of stations FFMJ (Frankfurt, Germany), KOUG (Kourou, French Guinea) and REYK (Reykjavik, Iceland) at February 6<sup>th</sup> and 7<sup>th</sup> 2025. In this example, the position estimates are significantly influenced by an active ionosphere.

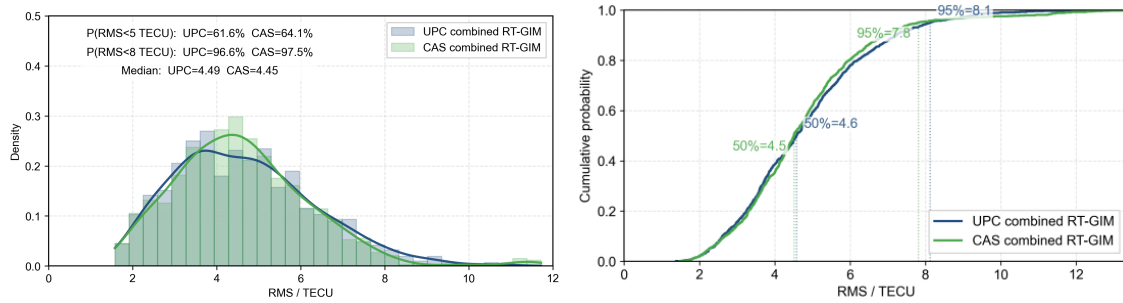

**Figure 8:** Probability density (left) and Cumulative probability (right) distributions of RMS VTEC differences for UPC and CAS combined RT-GIMs in comparison to the IGS final GIM.

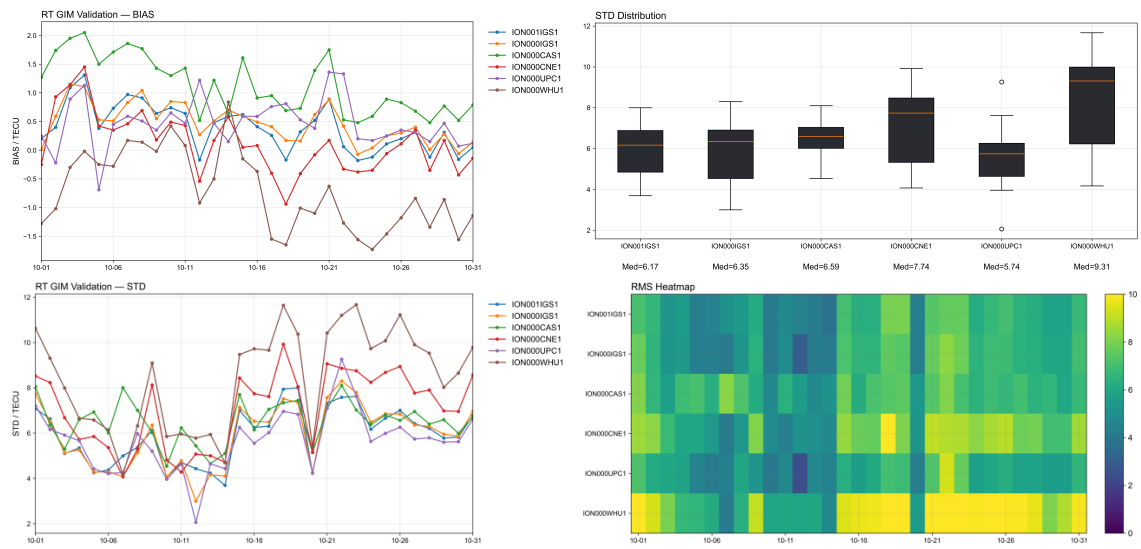

**Figure 9:** Performance assessment of global ionospheric products provided by different RTACs using independent DORIS observation data.

## References

- Söhne, W., P. Neumaier, J. Schmidt, W. Wiesensarter, A. Stürze, A. Rülke (2025). BKG Regional Data Center. IGS Technical Report 2025. *This Volume*.
- Teunissen, P.J.G. (2005). GNSS Best Integer Equivariant Estimation. In Sansò, F. (eds) *A Window on the Future of Geodesy*. International Association of Geodesy Symposia, Vol. 128, Springer, Berlin, Heidelberg. [https://doi.org/10.1007/3-540-27432-4\\_72](https://doi.org/10.1007/3-540-27432-4_72).
- Wang, N. (2025a). Release of CAS regional data center IGGNtrip caster V1.1, IGS-RTWG-374.
- Wang, N. (2025b). New proposed ionospheric RT-RMS corrections transmitted in CAS product streams, IGS-RTWG-375.



# Reference Frame Committee

## Technical Report 2025

P. Rebischung<sup>1,2</sup>, M. de La Serve<sup>1,2</sup>

<sup>1</sup> Université Paris Cité, Institut de physique du globe de Paris  
CNRS, IGN, F-75005 Paris, France

<sup>2</sup> Université Gustave Eiffel, Géodata Paris, IGN, F-75238 Paris, France  
E-mail: [igs-rf@ign.fr](mailto:igs-rf@ign.fr)


Besides operational combinations of the daily terrestrial frame (SINEX) solutions provided by the IGS Analysis Centers as part of their final products (Section 1), the Reference Frame Committee activities in 2025 included:

- the definition of a new reference frame for the IGS products, IGc20, based on the second annual update of ITRF2020, ITRF2020-u2024 (Section 2),
- contributions to the IGS campaign for the calibration of the BDS-3 and QZSS satellite antennas (Section 3),
- the development of new services on the IGS terrestrial frame combination website, <https://webigs-rf.ign.fr> (Section 4).

## 1 Operational SINEX combinations

The main operational task of the Reference Frame Committee is to combine the daily terrestrial frame (SINEX) solutions provided by the IGS Analysis Centers (ACs) as part of their final products. The daily combined SINEX solutions thus obtained contain the official daily IGS station position and Earth Rotation Parameter (ERP) estimates. The residuals from the daily SINEX combinations additionally allow evaluating the consistency and quality of the SINEX solutions provided by the different ACs.

Figure 1 shows the WRMS of the Analysis Center (AC) station position residuals from the daily IGS SINEX combinations, i.e., the global level of agreement between the AC and IGS combined station positions once reference frame differences have been removed, since the beginning of 2025. These WRMS have remained in 2025 at similar stable levels as in the previous years.

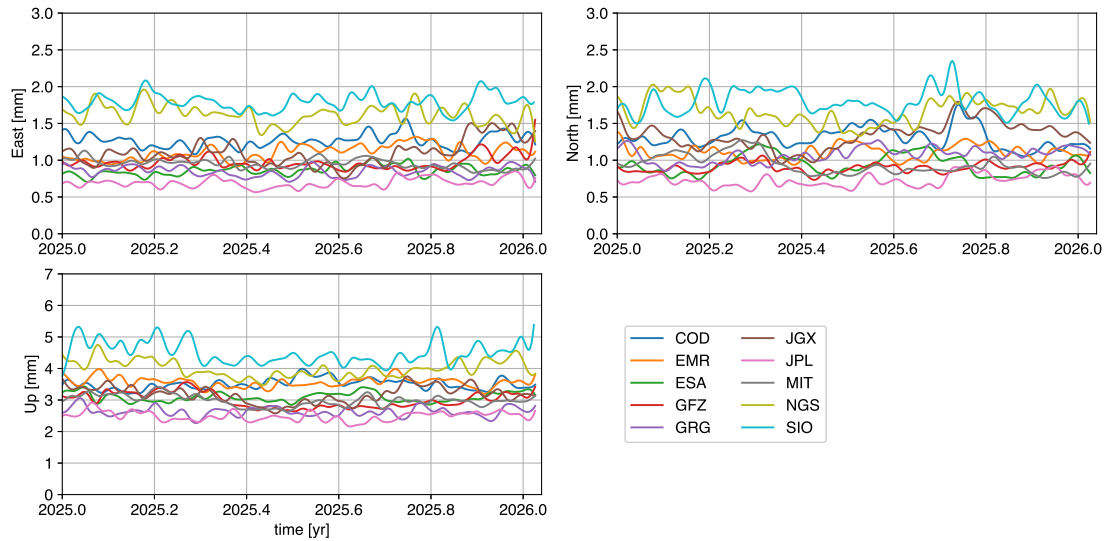


**Figure 1:** WRMS of AC station position residuals from the 2025 daily IGS SINEX combinations. All WRMS time series are low-pass filtered with a 20 cpy cutoff frequency.

## 2 IGc20 reference frame

To mitigate the progressive obsolescence of the International Terrestrial Reference Frame (ITRF) station coordinates due to extrapolation errors and to the occurrence of new station position discontinuities, the International Earth Rotation and Reference Systems Service (IERS) committed to provide yearly updates of ITRF2020 until a full new version of the ITRF becomes necessary. The first annual update of ITRF2020, ITRF2020-u2023 (Altamimi et al., 2024), was adopted by the IGS on February 2, 2025 in the form of the so-called IGb20 reference frame (IGSMail #8543). Similarly, the second annual update of ITRF2020, ITRF2020-u2024 (Altamimi et al., 2025), has been adopted by the IGS since January 11, 2026 in the form of a new reference frame called IGc20.

IGc20 is a simple extract of ITRF2020-u2024 coordinates for 346 stable, well-performing, operational and historical IGS stations. The same 343 stations as in the previous IGS reference frame, IGb20, were retained, while 3 new stations were added in areas previously sparsely covered by IGS reference frame stations (see their distribution in Figure 2):

- CASC00PRT (Cascais, Portugal): historical EUREF station with 28-year long position time series, which recently joined the IGS network.
- MANA00NIC (Managua, Nicaragua): historical IGS station with 25-year long position time series. Although MANA00NIC was displaced by many earthquakes over its observation history, it was nevertheless selected in IGc20 because of its strategic location in Central America, where the only two other IGS reference frame stations are

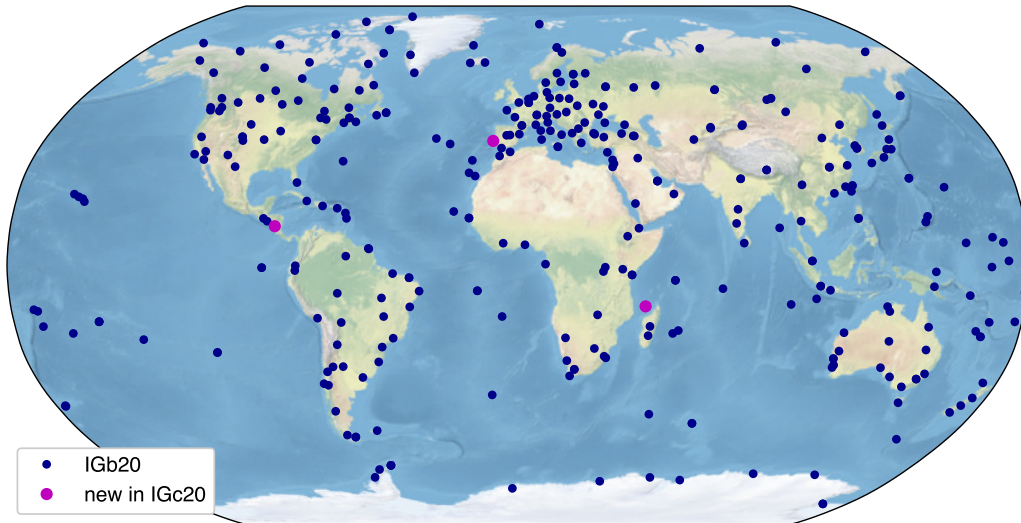

**Figure 2:** Distribution of the IGc20 reference frame stations.

either dormant (GUAT00GTM) or without up-to-date ITRF2020-u2024 coordinates due to a recent earthquake (SSIA00SLV).

- MAYG00MYT (Dzaoudzi, Mayotte): the 11-year long position time series of the station features a large transient deformation pattern due to the 2018–2022 volcano-tectonic episode in Mayotte. While this pattern was roughly approximated by a piecewise linear model in previous ITRF releases, it is now accurately represented by a physics-based "double-exponential" model in ITRF2020-u2024.

More details on the IGc20 reference frame and its usage may be found in [IGSMail #8634](#).

Since the ITRF2020 yearly updates are aligned in origin, scale and orientation to the original ITRF2020 solution, IGc20 should not be considered as a complete new reference frame, but rather as an update to individual IGb20 station coordinates. This alignment implies that the transformation parameters between ITRF2020 (IGS20), ITRF2020-u2023 (IGb20) and ITRF2020-u2024 (IGc20) are all zero. It also implies that the switches from IGS20 to IGb20, then IGc20 did not introduce any significant “datum” changes in the IGS products. On the other hand, the precision and accuracy of the alignment of the IGS products to the reference frame benefit from the adoption of regularly updated reference station coordinates.

### 3 BDS-3 / QZSS satellite antenna calibration campaign

In the perspective of developing fully multi-GNSS IGS products, a campaign for an empirical calibration of the BDS-3 and QZSS satellite antennas was initiated by the IGS Reference Frame Committee, Multi-GNSS Pilot Project and Antenna Committee in the end of 2023. The overall aim of the campaign is to incorporate the BDS-3 and QZSS constellations into the IGS operational processing, while minimizing any possible adverse impact on the IGS terrestrial frame products, as well as on the access to the ITRF by users of the IGS orbit and clock products. Given the differences observed between the manufacturer calibrations and empirical calibrations of the BDS-3 satellite antennas in particular (e.g., Zajdel et al., 2022), a necessary preparatory step for that purpose is to incorporate into the current IGS ANTEX file (igs20.atx) empirical phase variation patterns and phase center offsets for the BDS-3 and QZSS satellites compatible with the IGS20 reference frame.

In the first step of the campaign, phase variation patterns were estimated for the BDS-3 satellites and the B1C/B2a frequency combination. Contributions from six ACs were combined and compiled by Steigenberger et al. (2024) into an intermediate ANTEX file. In the second step of the campaign, the nadir component of phase center offsets (z-PCOs) have been estimated by eight ACs for the BDS-3 (B1C/B2a) and QZSS (L1C/L5) satellites, and the results were combined by the Reference Frame Committee (Steigenberger et al., 2025). Although the B1I/B3I frequency combination will not be used in the generation of future IGS operational products, updates to the BDS-3 (B1I/B3I) satellite z-PCOs were also estimated by the German Aerospace Center (DLR) and Wuhan University. The new BDS-3 satellite antenna phase center model was then tested and validated in the generation of orbit and clock products by Wuhan University and in PPP-AR by the Chinese Academy of Sciences. At the time of writing, the publication of a new version of igs20.atx including the new BDS-3 / QZSS satellite antenna phase center model is imminent, and a scientific paper is in preparation.


Afterwards, the impact of adding the BDS-3 and/or QZSS constellations into the operational processings of individual ACs willing to do so will be assessed on a case-by-case basis. The impact on the terrestrial frame products (resp. GPS, GLONASS, Galileo orbit and clock products) will be assessed by the Reference Frame Committee (resp. Analysis Center Coordinator) from parallel series of test solutions, after which decisions will be taken on the incorporation of the new systems in the AC operational products.

## 4 New services on <https://webigs-rf.ign.fr>

### 4.1 Monitoring of satellite z-PCOs

One of the outcomes of the BDS-3 / QZSS satellite antenna calibration campaign was the finding of apparent jumps in the time series of z-PCO estimates of certain BDS-3 satellites (accounted for by means of piecewise constant z-PCOs in the new antenna model). To

monitor possible future occurrences of similar jumps which may require future updates of `igs20.atx`, a new webpage was set up at <https://webigs-rf.ign.fr/zpco>. It displays weekly-updated time series of GPS, GLONASS, Galileo, BDS-3 and QZSS satellite z-PCO estimates derived from different series of AC SINEX solutions. Figure 3 shows an example of the z-PCO time series displayed for the BDS-3 satellite C215.

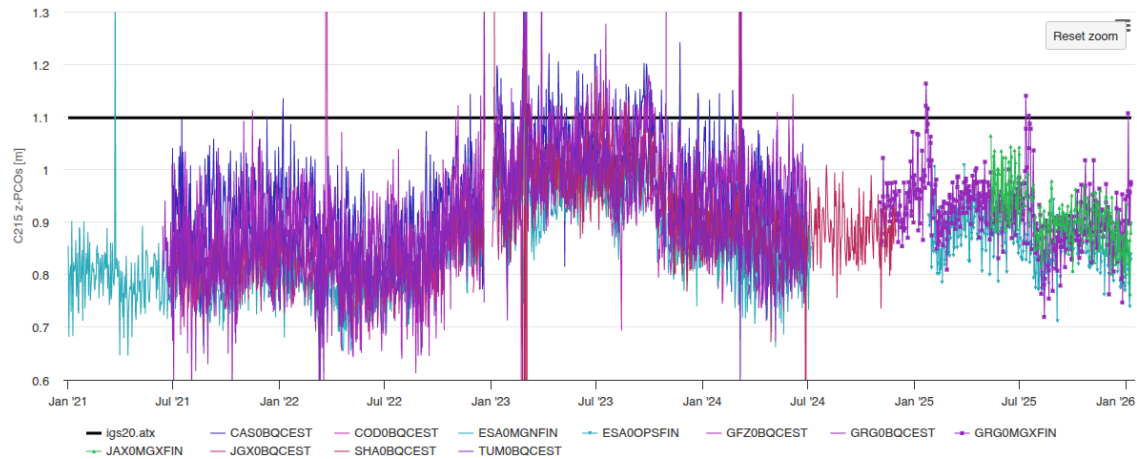

**Figure 3:** Example of satellite z-PCO time series displayed at <https://webigs-rf.ign.fr/zpco>.

## 4.2 Web service for the computation of possible co-seismic displacements

Back in 2023, an automatic procedure was set up to monitor and record the possible co-seismic displacements of IGS stations. The Global Centroid-Moment-Tensor (CMT; [Ekström et al., 2012](#)) catalog is scanned every day for new earthquakes. For every new earthquake, approximate co-seismic displacements are calculated for all IGS stations using a simple half-space dislocation model (see details at <https://webigs-rf.ign.fr/coseismic>). Whenever one or more calculated displacements exceed 1 mm, the information is distributed through the IGSSTATION and IGS-ACS mailing lists. The database of the possible co-seismic displacements recorded by IGS stations, available at [ftp://igs-rf.ign.fr/pub/coseismic/IGS\\_coseismic.dat](ftp://igs-rf.ign.fr/pub/coseismic/IGS_coseismic.dat) and <https://webigs-rf.ign.fr/coseismic>, is also updated.

In 2025, a new web service was set up which allows users to compute possible co-seismic displacements anywhere on Earth, based on the same CMT catalog and half-space dislocation model. Instructions on how to request this web service are given at [https://webigs-rf.ign.fr/api/doc/#/Seismic/post\\_coseismic\\_request](https://webigs-rf.ign.fr/api/doc/#/Seismic/post_coseismic_request).

## References

- Altamimi, Z., Rebischung, P., Collilieux, X., Métivier, L., Barnéoud, J., Chanard, K., and de La Serve, M. (2024). ITRF2020-u2023 [Data set]. IERS ITRS Center Hosted by IGN and IPGP, doi: <https://doi.org/10.18715/IPGP.2025.MH0MEM4R>
- Altamimi, Z., Rebischung, P., Collilieux, X., Métivier, L., Barnéoud, J., Chanard, K., and de La Serve, M. (2025). ITRF2020-u2024 [Data set]. IERS ITRS Center Hosted by IGN and IPGP, doi: <https://doi.org/10.18715/IPGP.2025.MH0MIN1J>
- Ekström, G., Nettles, M., Dziewonski, A. M. (2012). The global CMT project 2004-2010: Centroid-moment tensors for 13,017 earthquakes, *Physics of the Earth and Planetary Interiors*, 200-201:1-9, doi: <https://doi.org/10.1016/j.pepi.2012.04.002>
- Steigenberger, P., Rebischung, P., Montenbruck, O., Villiger, A., Dach, R., Deng, Z., Dilssner, F., Duan, B., Guo, J., Song, S. (2024) BDS/QZSS satellite antenna calibration campaign. IGS Workshop 2024, Bern, Switzerland, [https://elib.dlr.de/205651/1/IGSWS\\_2024\\_BDS\\_QZS\\_camp.pdf](https://elib.dlr.de/205651/1/IGSWS_2024_BDS_QZS_camp.pdf)
- Steigenberger, P., Rebischung, P., Akiyama, A., Brockmann, E., Deng, Z., Dilssner, F., Duan, B., Geng, J., Guo, J., Saquet, E., Song, S., Villiger, A., and Montenbruck, O. (2025). IGS BeiDou-3 satellite antenna calibration campaign. IAG Scientific Assembly 2025, Rimini, Italy, [https://elib.dlr.de/216593/1/IAG\\_2025\\_BDSant.pdf](https://elib.dlr.de/216593/1/IAG_2025_BDSant.pdf)
- Zajdel, R., Steigenberger, P., Montenbruck, O. (2022) On the potential contribution of BeiDou-3 to the realization of the terrestrial reference frame scale. *GPS Solutions*, 26(109), <https://doi.org/10.1007/s10291-022-01298-0>

# RINEX Committee

## Technical Report 2025

F. Gini<sup>1</sup>, A. Hauschild<sup>2</sup>

<sup>1</sup> ESA/ESOC, Germany  
e-mail [FrancescoGini@esa.int](mailto:FrancescoGini@esa.int)

<sup>2</sup> Vice chair, DLR, Germany

### 1 Introduction

The IGS/RTCM RINEX committee was established in December 2011 to update and maintain the RINEX format to meet the needs of the IGS and the GNSS Industry. Since the RINEX format is widely used by the GNSS scientific community and industry it was decided that it should be jointly managed by the IGS and the Radio Technical Commission for Maritime Services – Special Committee 104 (RTCM-SC104). In this way the Committee consists of IGS scientific and institutional members and RTCM-SC104 industry members.

### 2 Membership

The committee has about 72 [members](#) at the current time and membership and subscription to the Mailing List can be requested [here](#). In addition, at the end of the year 2024, André Hauschild from DLR was appointed as new vice-chair.

### 3 Summary of Activities in 2025

The RINEX Committee activities of the 2025 have been the following:

- RINEX 4.02, initially published in October 2024, has been revised to accommodate editorial changes and clarifications, to improve the ICD readability and clarity. A release update of the same format (still RINEX 4.02 version) has been published in September 2025. No format changes were introduced with this update.

- The committee received requests to support the standardization of additional GNSS navigation message data bits, such as Authentication messages (Galileo and QZSS) and the Galileo High Accuracy Service. The request has been accepted by the RINEX Committee and the IGS Governing Board and a dedicated Task Force to standardize these data has been approved. The creation and activities of this Task Force will be conducted in 2026.
- After the interest of the community, already raised during the 2024 IGS Workshop, in the LEO-PNT technologies, the committee received the request to support the standardization of the LEO-PNT Observation and Navigation Messages within the RINEX ICD. This hot topic has led to a broader discussion within the Governing Board to tackle the following question: “Shall the IGS embrace the LEO-PNT systems?”. A survey to the entire IGS community has been conducted to assess the general interest and understand, at least preliminary, the implications of such a step. Activities in this domain will be conducted in 2026.

## **4 Planned 2026 Activities**

- Review of open request of changes for RINEX 4.02 (e.g., review of Galileo ICD released in November 2025)
- Formal creation and kick of the activities of the Task Force for the standardization of the Navigation message data bits.
- Continue to support the investigation in the LEO-PNT domain.

# Satellite Vehicle Orbit Dynamics

## Technical Report 2025

B. Duan<sup>1</sup>

<sup>1</sup> Institute for Astronomical and Physical Geodesy  
Technical University of Munich  
Arcisstr. 21, 80333 München, Germany  
E-mail: bingbing.duan@tum.de

## 1 Introduction

The IGS Satellite Vehicle Orbit Dynamics Committee (SVOD) was reactivated on 01 January 2025. Bingbing Duan (TUM - Technische Universität München) was elected as the new Chair. The Committee continues to aim at developing and testing precise satellite orbit models in order to reduce systematic errors in both satellite orbit ([Masoumi and Moore, 2021](#); [Zajdel et al., 2023](#)) and terrestrial reference frame products ([Rebischung et al., 2024](#)).

In 2025, a joint effort entitled “Toward a standardized GNSS satellite attitude modeling framework” was initiated to reduce attitude modeling inconsistencies among IGS analysis centers. In parallel, a second joint effort was launched to promote the consistent application of radiation pressure models developed by ESA ([Dilssner and Springer, 2025](#)), JPL ([Bar-Sever and Kuang, 2004, 2005](#)), and TUM ([Duan and Hugentobler, 2021](#); [Duan et al., 2020, 2022](#)).

## 2 GNSS Satellite Attitude Modeling Activities

Accurate modeling of GNSS satellite attitude is essential for antenna phase center modeling, phase wind-up correction, and precise radiation force modeling. Inconsistent handling of satellite attitude among IGS analysis centers increases the complexity of clock product combination and may introduce inconsistencies in Precise Point Positioning with Ambiguity Resolution (PPP-AR) applications.

GNSS satellites typically employ a nominal yaw steering attitude to keep their navigation

antennas pointing toward the Earth’s center while maintaining the solar panel normal close to the Sun direction. During the eclipse season, however, nominal yaw steering often requires angular rotation rates that exceed the mechanical limitations of the attitude control system when crossing the orbital noon and midnight points. To address this, GNSS satellite manufacturers have implemented various rate-limited attitude laws, although detailed descriptions are not always publicly available.

Given the significant differences among IGS analysis centers in modeling rate-limited satellite attitude, a joint effort entitled “Toward a standardized GNSS satellite attitude modeling framework” has been established. The effort currently involves 22 contributors from 11 institutions, as listed in Table 1.

**Table 1:** Contributing institutions and participants

Institution	Contributors
CODE	Rolf Dach, Elmar Brockmann, Daniel Arnold, Pascal Stebler
CNES/CLS	Georgia Katsigianni, Sylvain Loyer, Alvaro Santamaría-Gómez
DLR	Oliver Montenbruck, Peter Steigenberger
ESA	Florian Dilssner
GFZ	Longjiang Tang, Benjamin Männel
JPL	Yoaz Bar-Sever, Da Kuang, Ant Sibthorpe, Paul Ries
LNTU	Zhiguo Deng
TUD	Lotfi Massarweh
TUG	Torsten Mayer-Guerr
TUM	Bingbing Duan, Urs Hugentobler
WUM	Jing Guo

In this contribution, we revisit yaw-rate-limited GNSS attitude models derived from manufacturer documentation, reverse-PPP analyses, and interpretations of published attitude quaternions. A harmonized GNSS attitude modeling framework is proposed to provide a transparent and reproducible basis, supporting inter-analysis-center consistency and alignment between IGS products and high-precision GNSS applications.

This work will be presented at the IGS Workshop 2026. The developed attitude framework will be maintained and refined within the IGS SVOD Committee.

### 3 Radiation Pressure Modeling Activities

Accurate radiation pressure modeling for GNSS satellites is essential for precise orbit determination (POD) and terrestrial reference frame realization, including station coordinates and Earth rotation parameters. For satellites with known surface properties (e.g., Galileo and QZSS), a box-wing solar radiation pressure (SRP) model combined with the Empirical CODE Orbit Model (ECOM2) is widely used by IGS analysis centers ([Arnold](#)

et al., 2015). However, important thermal effects, such as radiator emission and imbalanced thermal radiation from navigation antennas and solar panels, are typically neglected because detailed thermal information is not publicly available.

To mitigate these limitations, several IGS analysis centers, including ESA and JPL, have developed empirically derived radiation pressure models based on long-arc orbit fitting to precise orbit products. The ESA-RnR25 model expresses empirical forces for all GNSS satellites as Fourier functions of the Earth-satellite-Sun angle. The JPL GSPM series models incorporate additional dependencies on the Sun elevation angle ( $\beta$ ) and have recently been extended to include Solar Flux variability to accommodate complex spacecraft features and shadow transition effects. At TUM, GNSS orbit macro models including SRP, Earth radiation pressure, and thermal radiation pressure have been developed through parameter estimation based on real GNSS observations.

To facilitate cross-implementation of these models in independent software packages, a joint effort between ESA, JPL, and TUM has been initiated. The current contributors are:

- **ESA:** Florian Dilssner, Tim Springer
- **JPL:** Da Kuang, Yoaz Bar-Sever
- **TUM:** Bingbing Duan, Urs Hugentobler

Particular attention is given to ensuring consistency in attitude modeling, Sun position modeling (including  $\beta$  angle computation), treatment of additional non-gravitational forces, and Earth-shadow handling. This enables a controlled assessment of the impact of each model on POD and geodetic parameter estimation.

This work will be presented at the 46th COSPAR Scientific Assembly (2026) as an invited contribution, and the results will be shared publicly through the IGS SVOD Committee.

## Acronyms

CLS	Collecte Localisation Satellites
CNES	Centre National d'Études Spatiales
CODE	Center for Orbit Determination in Europe
DLR	Deutsches Zentrum für Luft- und Raumfahrt
ESA	European Space Agency
GFZ	Deutsches GeoForschungsZentrum
JPL	Jet Propulsion Laboratory
LNTU	Liaoning Technical University
TUD	Technische Universiteit Delft
TUG	Technische Universität Graz
TUM	Technische Universität München
WUM	Wuhan University

## References

- Arnold D, Meindl M, Beutler G, Dach R, Schär S, Lutz S, Prange L, Sośnica K, Mervart L, and Jäggi A. CODE's new solar radiation pressure model for GNSS orbit determination. *Journal of Geodesy*, 89(8):775–791, doi:10.1007/s00190-015-0814-4, 2015.
- Bar-Sever Y and Kuang D. New empirically derived solar radiation pressure model for global positioning system satellites. The Interplanetary Network Progress Report 42(159):1–11, [http://ipnpr.jpl.nasa.gov/progress\\_report/42-159/159I.pdf](http://ipnpr.jpl.nasa.gov/progress_report/42-159/159I.pdf), 2004.
- Bar-Sever Y and Kuang D. New empirically derived solar radiation pressure model for global positioning system satellites during eclipse seasons. The Interplanetary Network Progress Report 42(160):1–4, [http://ipnpr.jpl.nasa.gov/progress\\_report/42-160/160I.pdf](http://ipnpr.jpl.nasa.gov/progress_report/42-160/160I.pdf), 2005.
- Dilssner F and Springer T. May the Force Be Simple: Fourier-Based Radiation Pressure Models for all GNSS Spacecraft. In: Proceedings of the 38th International Technical Meeting of the Satellite Division of The Institute of Navigation (ION GNSS+ 2025), Baltimore, Maryland, pp 3251–3265, doi:10.33012/2025.20347, 2025.
- Duan B and Hugentobler U. Enhanced solar radiation pressure model for GPS satellites considering various physical effects. *GPS Solutions* 25(2), doi:10.1007/s10291-020-01073-z, 2021.
- Duan B, Hugentobler U, Hofacker M, and Selmke I. Improving solar radiation pressure modeling for GLONASS satellites: *Journal of Geodesy* 94(8), doi:10.1007/s00190-020-01400-9, 2020.

- Duan B, Hugentobler U, Selmke I, Marz S, Killian M, and Rott M. BeiDou satellite radiation force models for precise orbit determination and geodetic applications. *IEEE Transactions on Aerospace and Electronic Systems* 58(4):2823–2836, doi:10.1109/TAES.2021.3140018, 2022.
- Masoumi S, and Moore M. Multi-GNSS orbit solutions from the third IGS Reprocessing. In: *Tour de l'IGS 1st stop: Repro3*, IGS online, <https://igs.org/tour-de-igs/presentations>, 2021.
- Rebischung P, Altamimi Z, Métivier L, Collilieux X, Gobron K, and Chanard K. Analysis of the IGS contribution to ITRF2020. *Journal of Geodesy* 98(6), doi:10.1007/s00190-024-01870-1, 2024.
- Zajdel R, Masoumi S, Sośnica K, Galczyn F, Strugarek D, and Bury G. Combination and SLR validation of IGS Repro3 orbits for ITRF2020. *Journal of Geodesy* 97(10), doi:10.1007/s00190-023-01777-3, 2023.



# Tide Gauge Benchmark Monitoring Pilot Project Technical Report 2025

M. Gravelle<sup>1</sup>, G. Wöppelmann<sup>1</sup>

<sup>1</sup> La Rochelle University – CNRS  
LIENSs, 2 rue Olympe de Gouges, 17000 La Rochelle, France  
e-mails [mederic.gravelle@univ-lr.fr](mailto:mederic.gravelle@univ-lr.fr) and [guy.woppelmann@univ-lr.fr](mailto:guy.woppelmann@univ-lr.fr)

**Cautionary note:** TIGA was revived in 2025 after a pause of approximately three years, and its membership is currently being finalized. The text below reflects the understanding and views of the new co-chairs based on the discussions held so far and should not be interpreted as a finalized or formally agreed position of the group for 2025.

## 1 Historical perspective

The TIGA Committee (Pilot Project at that time) was established in 2001 to support GNSS tide gauge benchmark monitoring, that is, the geocentric determination of tide gauge datums and their vertical stability using permanent GNSS stations co-located with tide gauges.

The primary scientific objective of TIGA has been to provide GNSS-based estimates of vertical land motion at tide gauge sites, with uncertainties commensurate with those of long-term sea-level change derived from tide gauge records, i.e., at the sub-millimeter per year level. Additional applications were envisaged from the outset, including the unification of vertical datums (Sánchez and Bosch, 2009) and the calibration and validation of satellite radar altimetry sea-level data (Schöne et al., 2009).

To achieve these objectives, the following core components and activities were identified:

### 1. GNSS at Tide Gauge stations:

- Promote the installation of GNSS stations at tide gauge locations.

- Provide training for tide gauge operators on GNSS installation, configuration, metadata management, and quality control (QC).
- Encourage the establishment of local leveling ties between the GNSS antenna reference point and the tide gauge datum (benchmarks).
- Offer advice on emerging applications.

**2. Thematic global Data Center:**

- Develop a dedicated data center for assembling, quality-controlling, and distributing data and metadata from GNSS at tide gauge stations.

**3. TIGA Analysis Centers:**

- Ensure consistent reprocessing of GNSS data at tide gauge stations, aligned with the latest IGS reprocessing standards.
- Engage at least three individual analysis centers to allow for effective inter-comparison of results.


**4. TIGA combination Center:**

- Establish a combination center to evaluate products (coordinate time series and velocities) from individual groups and produce official, combined TIGA products.

The implementation of these components followed the best-effort model typical of the IGS, with its associated strengths and limitations, depending on the level of engagement of contributing institutions and the resources available to them.

Figure 1 shows the distribution of GNSS stations located within 1 km of a tide gauge for which daily RINEX files are available through the SONEL data assembly center. SONEL has acted as the IGS thematic (TIGA) Global Data Center. In this role, it collects, performs quality control, archives, and distributes daily RINEX files for GNSS stations located within 15 km of a tide gauge. The 1-km distance shown in Figure 1 was considered a reasonable threshold to allow precise (1st-order) leveling between the GNSS antenna and the tide gauge benchmark defining the tide gauge datum. The total number of GNSS stations at tide gauges considered in SONEL can be viewed on the SONEL website (<https://www.sonel.org/-GPS-.html>).

The choice of a 15 km distance also allowed the inclusion of GNSS stations that are serendipitously located near tide gauges, with the aim of encouraging tide gauge operators either to establish geodetic ties or, where appropriate, to install GNSS stations closer to the tide gauge. The latter situation could arise, for example, if repeated leveling were considered unrealistic, or if existing leveling data revealed local land motion instability between the GNSS antenna and the tide gauge. In this sense, Figure 1 includes both TIGA-committed stations and a broader set of stations that could potentially fall within

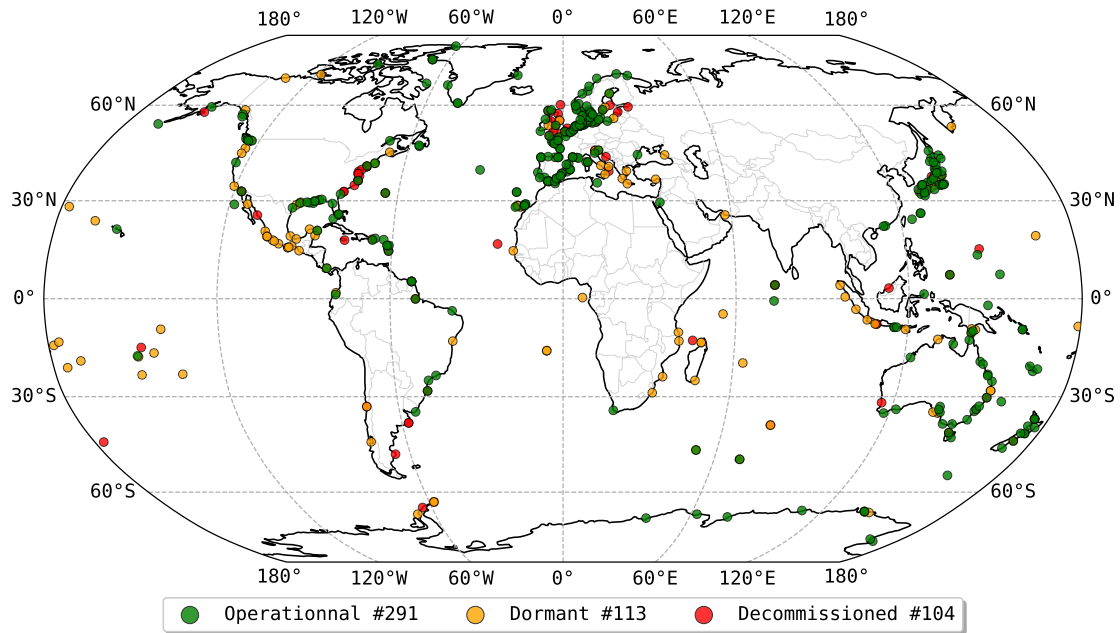

**Figure 1:** GNSS stations within 1 km of a tide gauge with daily RINEX files available at SONEL, acting as the IGS thematic (TIGA) global data center. Active stations are in green (291), stations without data for the past 30 days in orange (113), and decommissioned in red (104).


the scope of TIGA, as leveling over distances of up to 1-km was considered simple and realistic.

In addition to RINEX data, SONEL also collects and distributes products (position time series and velocities) from groups that follow the latest IGS standards associated with its reprocessing campaigns. Figure 2 presents GNSS velocity estimates produced by the two TIGA Analysis Centers that have contributed to IGS reprocessing efforts. Other groups have also processed GNSS data at tide gauge sites (e.g. [Sánchez and Bosch, 2009](#)) with the objective of contributing to combined TIGA solutions.

## 2 TIGA Renaissance in 2025

In 2025, the initial focus of the revived TIGA activities was on re-establishing the project and recruiting participants. The initial meetings discussed motivation of participants and original goals of TIGA and the associated components outlined above, while initiating discussions on their relevance and possible evolution. In particular:

- Identify what components of the original TIGA initiative were successful.

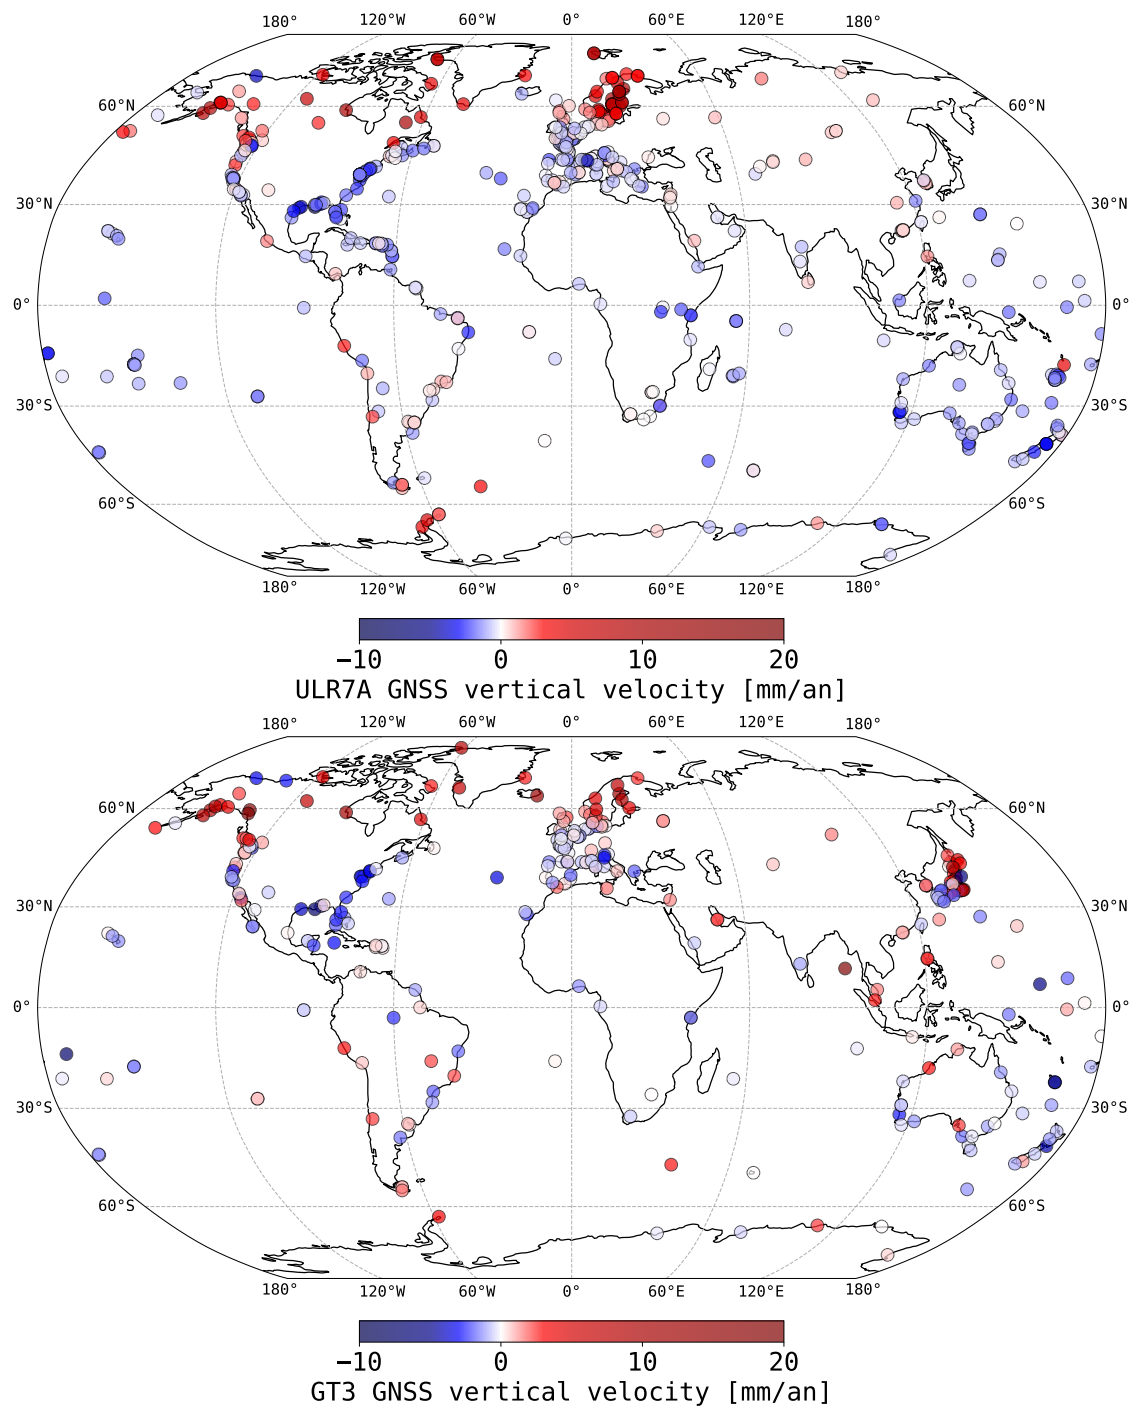

**Figure 2:** GNSS velocities estimated by ULR (top) and GFZ (bottom) from their contribution to IGS-repro3 (Gravelle et al. (2023); Männel et al. (2022), respectively).

- Assess which of these components should be maintained moving forward.
- Explore new opportunities and potential extensions of the TIGA framework.

These discussions emphasized the continued relevance of two core elements: the network of GNSS at tide gauge sites, and the maintenance of a thematic global data center. At the same time, participants recognized that new opportunities and challenges have emerged and should be considered in a renewed TIGA context.

## 2.1 Emerging opportunities

Two developments over the past decade appear particularly relevant for a TIGA renaissance. First, ground-based GNSS reflectometry (GNSS-IR; [Larson et al., 2013](#)) has emerged as a promising technique for measuring sea level directly using GNSS signals, complementing traditional tide gauge technologies. Demonstration studies (e.g. [Larson et al., 2017](#)) have shown the potential of GNSS-IR for mean sea level, stimulating the establishment of a dedicated portal at the PSMSL (<https://psmsl.org/data/gnssir/>). While this portal archives derived products (mean sea levels), the long-term value of GNSS-IR also requires appropriate archiving of raw GNSS data, often at higher sampling rates than the 30s considered within TIGA. Second, the long-recognized lack of repeated leveling data linking GNSS antennas and tide gauge reference points remain a critical limitation for many sites ([Wöppelmann and Marcos, 2016](#)). In this context, InSAR has the potential to provide complementary information on relative ground motion in the vicinity of tide gauges ([Filmer et al., 2020](#)). While not a replacement for precise leveling, InSAR may help address questions relative to the applicability of GNSS-derived displacements to tide gauges or nearby coastal infrastructure, particularly where strict co-location or repeated leveling is difficult.

## 2.2 Lessons from past experience

The revival of TIGA also provides an opportunity to step back and reflect on lessons learned from earlier phases. Questions raised include: What constitutes a TIGA station today? Is there still a need for independent analysis centers and a formal combination center? Which components worked well in the past, and which faced limitations? What new components or expertise may be required to address current and emerging applications? These questions are currently under discussion and will inform the future evolution of the TIGA Committee.

### 3 Acknowledgement

We would like to warmly thank our colleague and friend Tilo Schöne (GFZ Potsdam) for his long-standing commitment to TIGA and for his sustained efforts in advancing the project over many years, always with enthusiasm and a positive spirit.

### References

- Filmer, M.S., S.P.D. Williams, C.W. Hughes, G. Wöppelmann, W.E. Featherstone, P.L. Woodworth, and A. L. Parker. An experiment to test satellite radar interferometry-observed geodetic ties to remotely monitor vertical land motion at tide gauges. *Glob. Planet. Change*, 185, 1030842020, 2020.
- Gravelle, G. Wöppelmann, K. Gobron, Z. Altamimi, M. Guichard, T. Herring, and P. Rebischung. The ULR-repro3 GPS data reanalysis and its estimates of vertical land motion at tide gauges for sea level science. *Earth System Science Data*, 15:497–509, 2023.
- Larson, K. M., R.D. Ray, F.G. Nievinski, and T. Freymuller. The accidental tide gauge: a GPS reflection case study from Kachemak Bay, Alaska. *IEEE Geoscience and Remote Sensing Letters*, 10(5): 1200-1204, 2013.
- Larson, K. M., R.D. Ray, and S.D.P. Williams. A 10-year comparison of water levels measured with a geodetic GPS receiver versus a conventional tide gauge. *Journal of Atmospheric and Oceanic Technology*, 34(2): 295-307, 2017.
- Männel, B., T. Schöne, M. Bradke, and H. Schuh. Vertical land motion at tide gauges observed by GNSS: A new GFZ-TIGA solution. In J.T. Freymueller and L. Sánchez, L., editors, International Association of Geodesy Symposia, Vol. 154, pages 279-287, 2022.
- Sánchez, L., and W. Bosch. The role of the TIGA Project in the unification of classical height systems. International Association of Geodesy Symposia, Vol. 134, pages 285-290, 2009.
- Schöne, T., N. Schön, and D. Thaller. IGS Tide Gauge Benchmark Monitoring Pilot Project (TIGA): scientific benefits. *Journal of Geodesy*, 83:249-261, 2009.
- Schöne, T., et al. Tide Gauge Benchmark Monitoring Working Group Technical Report 2022. In R.Dach and E.Brockmann, editors, IGS Technical Report 2022, pages 229–231, 2022.
- Wöppelmann, G., and M. Marcos. Vertical land motion as a key to understanding sea level change and variability. *Reviews of Geophysics*, 54: 64–92, 2016.

# IGS Troposphere Committee Technical Report 2025

S. M. Byram

United States Naval Observatory  
3450 Massachusetts Avenue Northwest  
Washington DC 20392 USA  
[sharyl.m.byram.civ@us.navy.mil](mailto:sharyl.m.byram.civ@us.navy.mil)

## 1 Introduction


The IGS Troposphere Working Group (IGS TWG) was founded in 1998. The United States Naval Observatory (USNO) assumed chairmanship of the WG as well as responsibility for producing IGS Final Troposphere Estimates (IGS FTE) in 2011. In 2023, the current working groups of the IGS were transitioned to committees, thus making the former Troposphere Working Group now the Troposphere Committee.

Dr. Sharyl Byram has chaired the working group/committee since December 2015 and also oversees production of the IGS FTEs. IGS FTEs are produced within the USNO Earth Orientation Department GPS Analysis Division, which also hosts the USNO IGS Analysis Center. Rosa Pacione from e-GEOS in Italy is the Troposphere Committee's vice chair.

## 2 IGS Final Troposphere Product Generation 2025

USNO produces IGS Final Troposphere Estimates for nearly all of the stations of the IGS network subject to data availability. Each 24-hr site result file provides five-minute-spaced estimates of total troposphere zenith path delay (ZPD), north, and east gradient components, with the gradient components used to compensate for tropospheric asymmetry.

Since January 2017, the IGS Final Troposphere estimates have been generated with Bernese GNSS Software 5.2 ([Dach et al., 2015](#)) and in 2023 started using the IGS20 reference frame, the IGS realization of the ITRF2020 reference frame and transitioned to the IGB20 reference frame in February 2025. The processing uses precise point positioning (PPP; [Zumberge et al., 1997](#)) and the GMF mapping function ([Böhm et al., 2006](#)) with

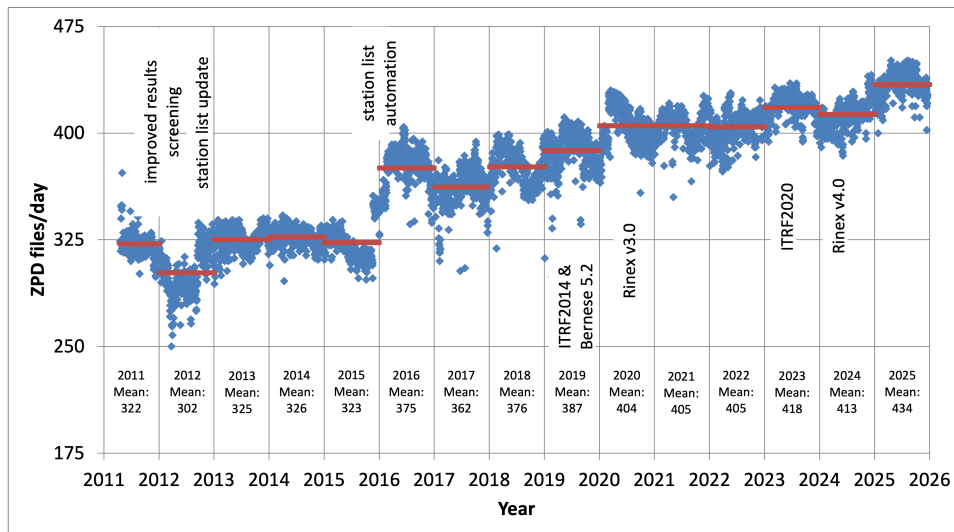

**Figure 1:** Number of IGS receivers for which USNO produced IGS Final Troposphere Estimates, 2011–2025. Red lines denote the mean for the year.

IGS Final satellite orbits/clocks and Earth orientation parameters (EOPs) as input. Each site-day’s results are completed approximately three weeks after measurement collection as the requisite IGS Final orbit products become available. Further processing details can be obtained from [Byram and Hackman \(2012\)](#).

Fig. 1 shows the number of receivers for which USNO computed IGS FTEs 2011-2025. The average number of quality-checked station result files submitted per day in 2025 was 434. Fig. 1 is annotated with major changes in the processing of the IGS FTEs, most which result in an increase of produced IGS FTEs. All available station data is processed and quality checked. The result files are available for download from the CDDIS data server at: <https://cddis.nasa.gov/archive/gnss/products/troposphere/zpd/>.

### 3 IGS Troposphere Committee Activities 2025

The goal of the IGS Troposphere Committee is to improve the accuracy and usability of GNSS-derived troposphere estimates. It does this by coordinating (a) committee projects and (b) technical sessions at the IGS Analysis Workshops.

The group usually meets once or twice per year: the fall in conjunction with the American Geophysical Union (AGU) Fall Meeting (USA), in the spring/summer, either in conjunction with the European Geosciences Union (EGU) General Assembly (Vienna, Austria), and/or at the IGS Workshop (location varies). Meetings are simulcast online so that members unable to attend in person can participate. Members can also communicate and coordinate activities using the IGS TWG email list.

In 2025, the Troposphere Committee meeting continued to work on the recommendations from the 2024 IGS Workshop in Bern, Switzerland:

1. **Test newer troposphere models in final troposphere estimates**

GMF is currently being used in the IGS Final Troposphere estimates. The recommendation of the committee is to test new troposphere models including the VMF model. However, there is concern about the 6-hour release discontinuities with the VMF model. Analysis of the effect of these discontinuities will be conducted. Other models will also be investigated as well.

2. **Repro3 reprocessing and comparison**

The committee recommends that the Repro3 combination products suitability for troposphere reprocessing is investigated. If determined to be a suitable time series for PPP reprocessing, the committee recommends creating a reprocessed troposphere estimate time series consistent with the Repro3 combination products. The committee also recommended to provide comparisons to the AC contributions if available to provide the ACs feedback.

3. **Multi-GNSS investigation**

The final recommendation from the committee meeting was to begin testing production and analysis quality of a multi-GNSS final troposphere product including other fully operational constellations. The quality analysis of these multi-GNSS estimates should be of combined observations as well as evaluating individual constellation inclusion into the estimates.

Communications on news and activities were distributed via the committee's mailing list.

## 4 How to Obtain Further Information

IGS Final Troposphere Estimates can be downloaded from: <https://cddis.nasa.gov/archive/gnss/products/troposphere/zpd>.

For technical questions regarding the estimates, please contact the Troposphere Committee Chair, Dr. Sharyl Byram, at [sharyl.m.byram.civ@us.navy.mil](mailto:sharyl.m.byram.civ@us.navy.mil).

To learn more about the IGS Troposphere Committee, you may:

- contact Dr. Sharyl Byram at [sharyl.m.byram.civ@us.navy.mil](mailto:sharyl.m.byram.civ@us.navy.mil)
- visit the IGS Troposphere Committee website: <https://twg.igs.org>
- subscribe to the IGS Troposphere Committee email list: <https://lists.igs.org/mailman/listinfo/igs-twg>

## References

- Byram, S. and C. Hackman. Computation of the IGS Final Troposphere Product by the USNO. IGS Workshop 2012, Olstzyn, Poland, 2012.
- Böhm, J., A. Niell, P. Tregoning, and H. Schuh. Global Mapping Function (GMF): A New Empirical Mapping Function Based on Numerical Weather Model Data. *Geophysical Research Letters*, 33(7):L07304, 2006. doi: 10.1029/2005GL025546, 2006.
- Dach, R., S. Lutz, P. Walser, and P. Fridez. (eds.). Bernese GNSS Software Version 5.2. (user manual). Astronomical Institute of University of Bern, Bern, Switzerland, 2015.
- Zumberge, J.F., M.B. Heflin, D.C. Jefferson, M.M. Watkins, and F.H. Webb. Precise Point Positioning for the Efficient and Robust Analysis of GPS Data from Large Networks. *J. Geophys. Res.*, 102(B3):5005–17, 1997.

# Inclusion, Diversity, Equity, and Accessibility Working Group Technical Report 2025

E. D’Anastasio<sup>1</sup>, R. Steffen<sup>2</sup>, R. Dach<sup>3</sup>, R. Ruddick<sup>4</sup>

<sup>1</sup> Earth Sciences New Zealand (since 1<sup>st</sup> July 2025, formerly GNS Science Te Pū Ao) (New Zealand)

<sup>2</sup> IAG EDI Task Force chair; Swedish Mapping, Cadastral and Land Registration Authority (Sweden)

<sup>3</sup> Astronomical Institute, University of Bern (Switzerland)

<sup>4</sup> Geoscience Australia, GNSS Infrastructure and Informatics, Positioning Australia Branch, Space Division (Australia)

## 1 Introduction

The IGS has made significant strides in improving geographic diversity over the past six years by adjusting its approach to regional representation, strategically recruiting members from underrepresented areas, embracing virtual meetings to accommodate its global workforce, and hosting capacity-building workshops. In 2024, to ensure long-term sustainability, the IGS continued fostering inclusive participation and inspiring future leaders with the creation of the IGS Inclusion, Diversity, Equity, and Accessibility Working Group (IDEA WG), in alignment with Goal 3 of the [IGS 2021+ Strategic Plan](#). The working group was established with two co-chairs, Camille Martire and Elisabetta D’Anastasio, with the aim of embedding inclusivity, diversity, equity, and accessibility in all IGS activities and decisions. In early 2025, Camille Martire stepped down from the co-chair position, and the chair of the International Association of Geodesy DEI Working Group Rebekka Steffen stepped in and provided invaluable support to the working group. The IDEA WG deliberately maintains an open membership policy. This approach ensures a broad range of perspectives, fostering inclusivity and minimising biases in its efforts.

The IGS IDEA statement was developed and endorsed by the IGS Governing Board in June 2024, and the full statement is attached here as an Appendix.

## 2 Accomplishments in 2025

Due to the impossibility of continuing to host the IDEA WG content on the <https://igs.org> website, the IDEA WG worked on migrating the content to the newly established International Association of Geodesy (IAG) website, <https://geodesy.science>. With the support of the IAG Bureau, the IDEA WG homepage, the IGS IDEA full statement and the working group charter have been migrated to the IAG website, and have been made available at the following link: <https://geodesy.science/idea/working-groups/igs/>. This effort started while the new IAG website was under development, and thanks to this the IAG Bureau created a dedicated top level section on IDEA (<https://geodesy.science/idea/>). IGS is the first IAG's service with a dedicated IDEA working group that is featured on the website.

The IDEA WG continued to encourage and support the translation of the IGS CORS Guidelines, in collaboration with the CB and the Infrastructure Committee. A pool of experts all around the globe contributed to this significant effort, and during 2025 the IGS CORS guidelines have been translated and published in Chinese (Junchen Xue, Haobo Li and Jianghui Geng), Arabic (General Authority for Survey and Geospatial Information GEOSA, Saudi Arabia) and Portuguese (Rui Fernandes). As of December 2025, the IGS CORS Guidelines have been made available in 7 languages: 5 of the 6 official United Nations Languages (Arabic, Chinese, English, French, Spanish), German and Portuguese. Nevertheless, the IGS primary version remains the one in English. The IDEA WG is deeply thankful to all those who contributed to this important effort.

The IDEA WG translated documents were promoted within other organisations and geodesy events, such as the Capacity Development workshops organised by the UN Global Geodetic Center of Excellence in 2025.

The IDEA WG reviewed the IGS Guidelines and Code of Conduct for IGS Events, which establishes clear expectations for respectful and inclusive participation to all IGS-organised and -sponsored events, while ensuring a professional and welcoming environment. The guidelines have been also reviewed alongside the final report of the IAG Task Force on Inclusion. Considerations extracted from those combined documents have been provided as an input to the Local Organising Committee of the IGS 2026 workshop in Santiago de Chile, Chile. To reiterate, the IGS code of conduct encourages respectful behavior, including valuing diverse perspectives, fostering collaboration, and providing constructive feedback; it strictly prohibits harassment, discrimination, aggression, and disruptive behavior, with examples provided to maintain a safe and professional atmosphere. Developing this explicit document allows the IGS to ensure its events remain inclusive, productive, and aligned with its mission of global scientific collaboration.

The IDEA WG actively supported the awareness of equality and diversity issues within IAG by co-organizing an EDI activity at the European Geosciences Union (EGU) General Assembly 2025 in Vienna. The event gathered geodesists interested in EDI questions to

discuss next steps. A similar event will be held at the upcoming EGU General Assembly in May 2026.

### 3 Plan Going Forward

The IDEA working group will continue to support and promote the translation of significant IGS Guidelines into UN official languages, with the Analysis Center Guidelines being identified as the next important document that the IGS community in underrepresented regions would benefit from.

Members of the IDEA WG will finalise the translation of the CORS guidelines in Hindi (Chiranjeevi Vivek G and Neelu Kasat). The IDEA WG will continue to promote and support translation efforts, and make sure that any updated version of the official CORS guidelines will be reflected into the translated versions, in coordination with the Infrastructure Committee.

During 2026, the IDEA WG will continue to support the Local Organising Committee and is planning to run an informal session during the IGS 2026 workshop.

Finally, the IDEA WG will work on updating the IGS events guidelines and Code of Conduct and align these with the IAG EDI Task Force report and official guidelines that will be developed in the future.

## 4 Appendix 1

### **Statement on Inclusion, Diversity, Equity, and Accessibility (IDEA)**

v1.0 – last updated on 2024-06-30

At the International GNSS Service (IGS), we are committed to fostering and upholding the principles of Inclusion, Diversity, Equity and Accessibility (IDEA) across all aspects of our organisation. We recognise that embracing these values not only enriches and supports our community, but also enhances the quality and impact of our work. We believe that by embracing and championing IDEA, we can advance our mission and truly provide the highest-quality GNSS data, products, and services for the benefit of the scientific community and society as a whole.

Inclusion is fundamental for the IGS' mission, in that it fosters a collaborative environment that values its diverse perspectives and supports all members. Open communication and collaboration are thoroughly encouraged, creating a culture where contributions are recognised and valued. Leveraging our years of global collaboration, we have developed an acute cultural awareness that allows us to build trust and rapport with members and stakeholders from diverse backgrounds. Using these tools, we strive to ensure everyone

feels welcomed and empowered to participate fully in IGS activities.

Diversity is pivotal for the IGS, as it ensures global representation, varied expertise, and a user-centred approach. Thanks to representation and participation from diverse geographic locations and types of institutions, the IGS is able to work towards GNSS data, products, and services that are relevant and applicable worldwide, serving a wide range of applications and stakeholders. Furthermore, diverse backgrounds bring a wide spectrum of expertise, perspectives, and insight to the table, enabling the IGS to tackle complex challenges from multiple angles and develop innovative solutions. We strive to encourage participation from all socioeconomic and educational backgrounds, career levels, ages, types of institution, genders, ethnic backgrounds, and disability statuses.

Equity is an indispensable value for the IGS, especially in terms of workload balance, transparent decision-making, and global access. Being a voluntary not-for-profit organisation, the IGS functions on a best-effort basis. In such a model, each IGS Component (and in particular our global array of Analysis Centres) provides an effort proportional to its capabilities and available resources. We however ensure that all contributions are equally welcome in the IGS community, and that their value in the IGS' processes (e.g., the product combinations) is equitably estimated. Furthermore, transparent decision-making steers the IGS, guided by objective criteria and a diverse Governing Board. This helps foster trust and accountability, and consequently ensures unbiasedness and fairness for all members. In our daily operations, we strive to provide equitable timing arrangements for meetings, workshops, and events, ensuring all members and interested community members can participate regardless of location. Finally, we ensure that IGS products and services are accessible, effective, and valid at the global scale.

Accessibility is a foundational element for IGS, as we strive to uphold open and freely available data and products at our core. To foster global participation, IGS activities are organised with flexibility so that remote participation is possible, and meeting agendas and minutes are shared transparently – aiding non-native English speakers in the community to participate fully and effectively. Furthermore, we strive to ensure that our digital platforms, products, services, and events are fully and freely accessible to the community.

To proactively uphold these values, the IGS has established the IDEA Working Group. Composed of passionate members committed to fostering the principles of inclusion, diversity, equity, and accessibility, the IDEA WG will help assess the organisation's progress, identify areas for improvement, and implement strategies across all IGS Components. Namely, a set of Guidelines are being developed to help IGS Components uphold IDEA standards and to provide guidance for evaluating some metrics of interest in order to measure progress.

This document will remain publicly available (on the IGS IDEA page – <https://geodesy.science/idea/working-groups/igs/>), ensuring transparency and accountability in our efforts to create a diverse, equitable, inclusive, and accessible environment for all members, eventually benefitting our mission and the scientific community and society as a whole.





**IGS** INTERNATIONAL  
G N S S SERVICE

**IGS CENTRAL BUREAU**

NASA Jet Propulsion Laboratory  
California Institute of Technology  
M/S 238-540  
4800 Oak Grove Drive  
Pasadena, California 91101  
United States of America

[igs.org](http://igs.org) | [cb@igs.org](mailto:cb@igs.org)

***AIUB***

**EDITOR**

Astronomical Institute  
University of Bern  
Sidlerstrasse 5  
3012 Bern  
Switzerland  
[www.aiub.unibe.ch](http://www.aiub.unibe.ch)

The IGS is a service of Global Geodetic  
Observing System International  
Association of Geodesy International  
Union of Geodesy and Geophysics

IGS is a Network Member of International  
Council for Science - World Data System

